

The Data Book Project

DatasheetArchive.com has launched an ambitious effort to digitize thousands of obsolete data books and technical manuals, making them searchable via the DatasheetArchive website.

Scroll down to see the scanned document.

SAS560S SAS570S



SENSOR FOR ELECTRONIC TUNING

Hitachi Integrated Circuits SAS560S and SAS570S are especially well suited for and application to radio and TV sets to perform touch-controlled switching functions.

■ FEATURES


- No limitation concerning polarity of two supply voltages. (pin 7 and 8)
- Low power dissipation: 130mW typical.
- High input sensitivity: 100nA typical.
- Low temperature-drift for the tuning voltage: $0.3V/^{\circ}C$ typical.

■ PIN ARRANGEMENT

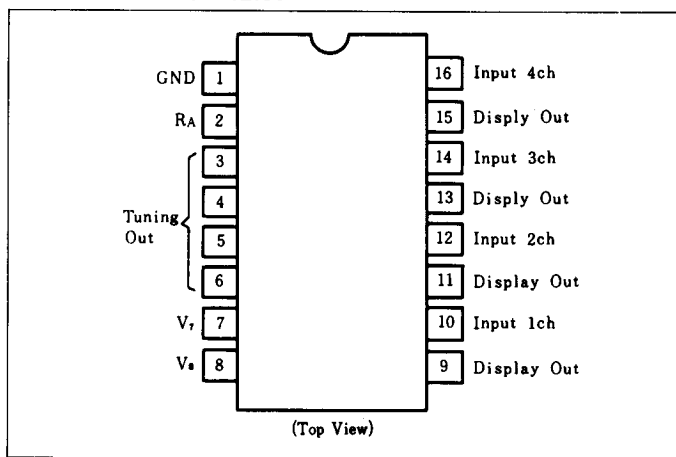

(DP-16)

■ FUNCTIONAL BLOCK DIAGRAM (SAS560S)

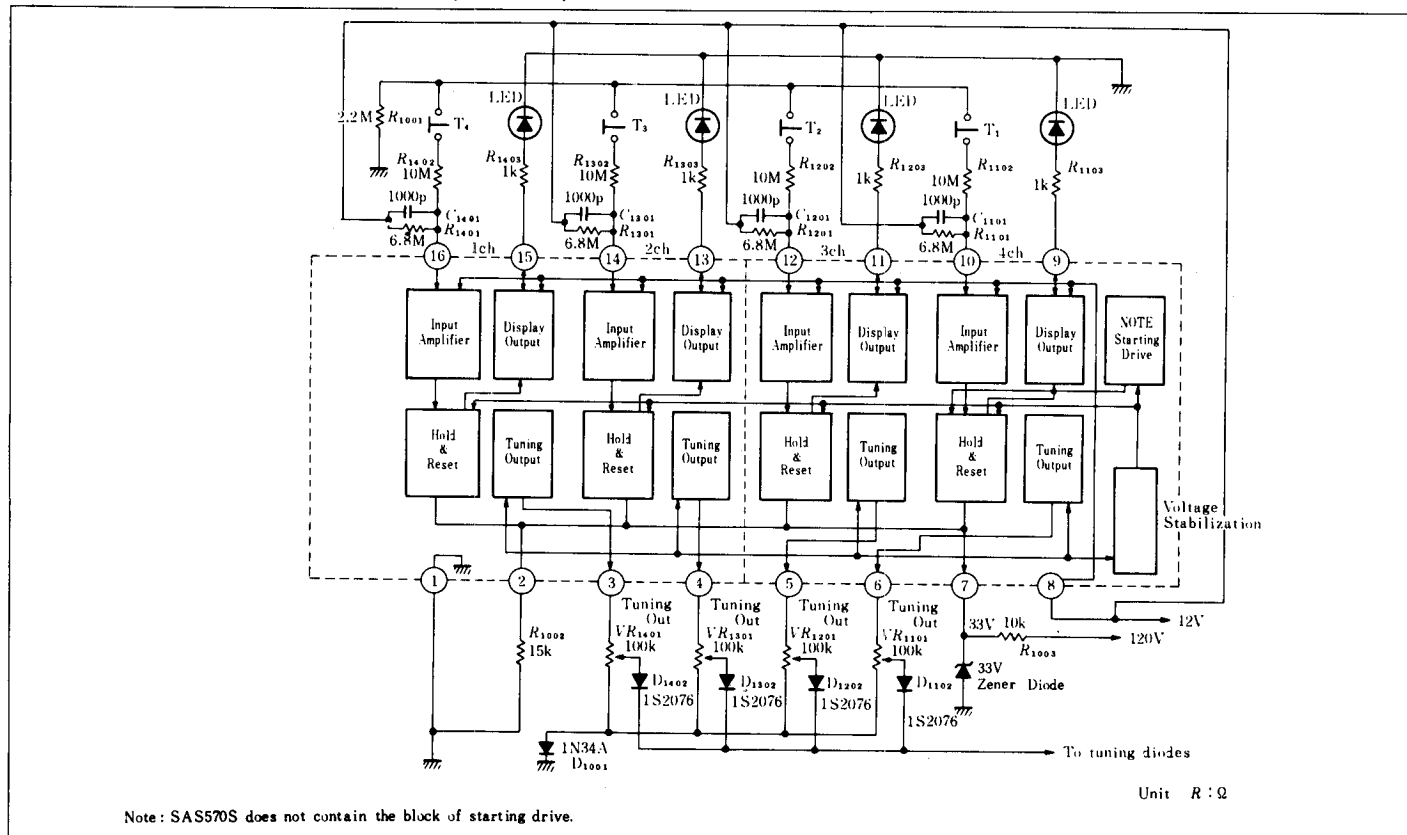


HA1190/HA1194 are also touch-controlled electronic switches. Functions are very similar to those of SAS570S/SAS560S although certain differences exist.

Differences

1. Typical external parts are changed; i.e., $R_{1002} = 24k\Omega$.
Circuit schematic is not changed.
2. Electrical characteristic is improved; i.e.
After simultaneously actuating several keys, only one channel remains on.
Other characteristics are not changed.
Package outline, Pin arrangement, etc. are identical with SAS560S/SAS570S.

CIRCUIT SCHEMATIC AND TYPICAL EXTERNAL COMPONENTS SAS570S

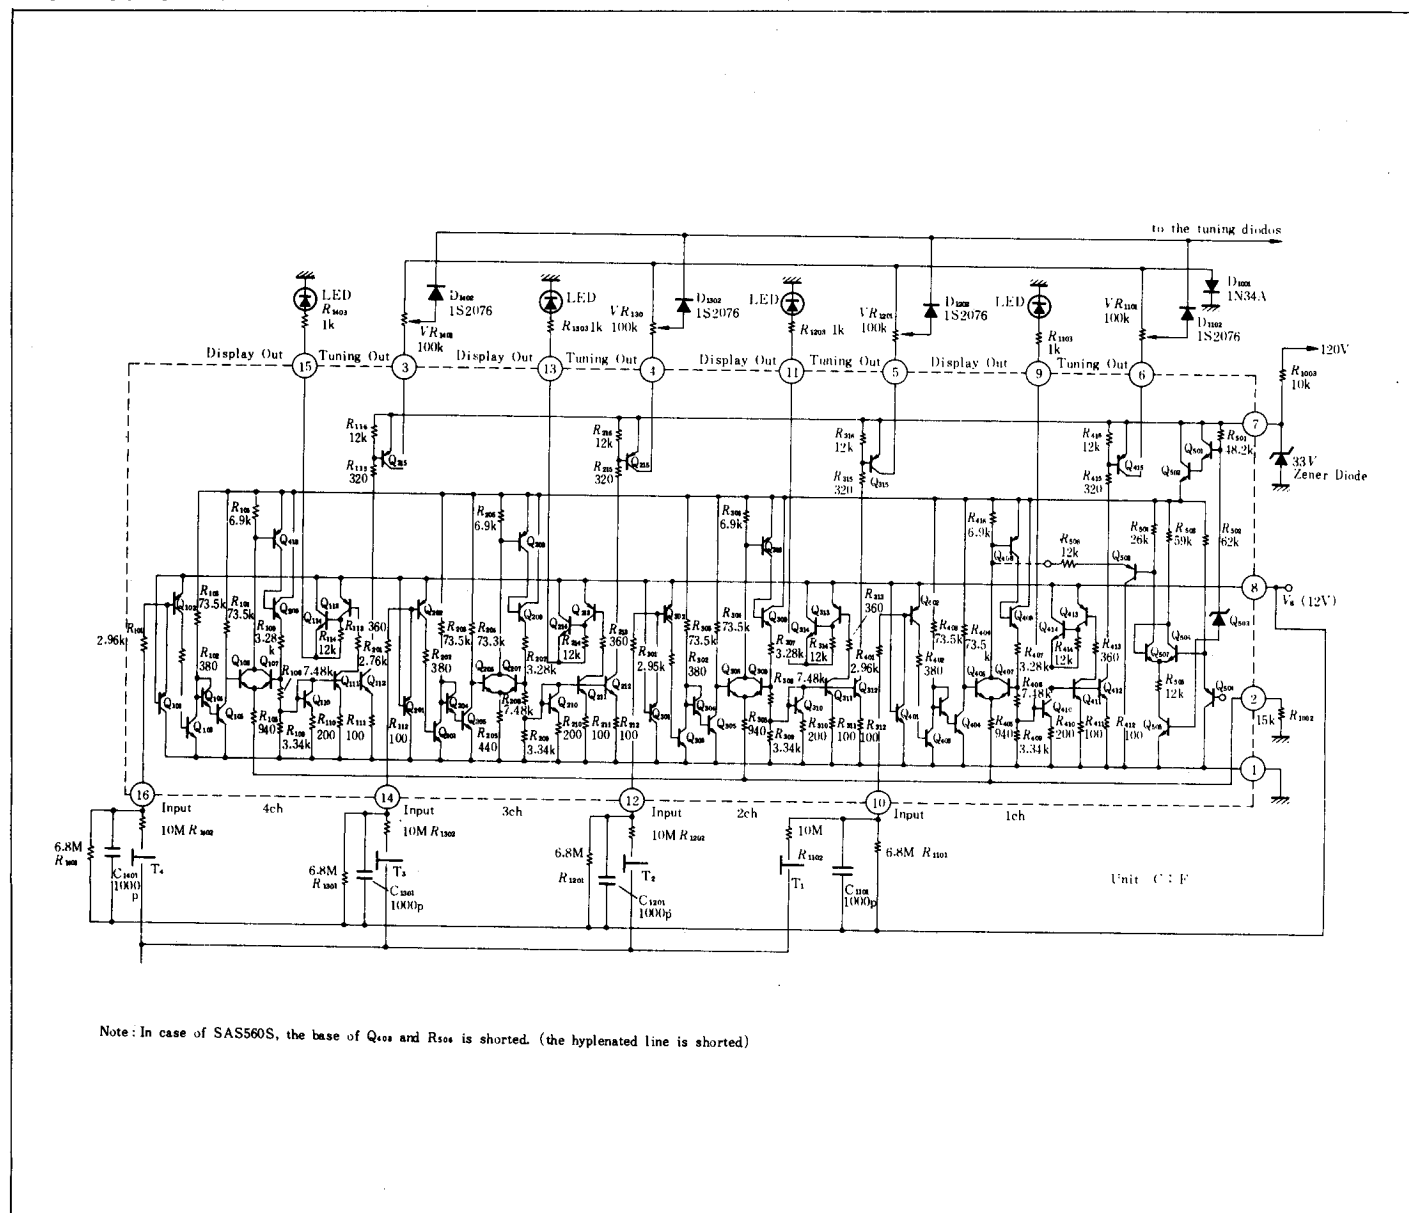

SAS560S, SAS570S

■ ABSOLUTE MAXIMUM RATINGS (at $T_a=25^\circ\text{C}$ unless otherwise specified)

Item		Symbol	Ratings	Unit
Supply Voltage	Pin 7	V_7	36	V
	Pin 8	V_8	26.5	V
Display output current		$I_9, I_{11}, I_{13}, I_{15}$	55	mA
Max. display output current*		$I_9 \text{ max}, I_{11} \text{ max}, I_{13} \text{ max}, I_{15} \text{ max}$	100	mA
Tuning output current		I_3, I_4, I_5, I_6	1.5	mA
Max. tuning output current*		$I_3 \text{ max}, I_4 \text{ max}, I_5 \text{ max}, I_6 \text{ max}$	10	mA
Storage temperature		T_{stg}	-40 to +125	$^\circ\text{C}$
Power dissipation**		P_T	700	mW
Range of operation	Pin 7	V_{7R}	8 to 36	V
	Pin 8	V_{8R}	5 to 24	V
Operating Temperature		T_{opr}	0 to +70	$^\circ\text{C}$

* Value at $t=2\text{sec max}$

** Value at $T_a=55^\circ\text{C}$

■ ELECTRICAL CHARACTERISTICS ($V_7=33\text{V}$, $V_8=12\text{V}$, $T_a=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	min	typ	max	Unit
Switching voltage while actuating keys T_1 to T_4	$V_2(\text{sw})$	4.3	4.9	5.5	V
Holding voltage after actuating keys T_1 to T_4	$V_2(\text{hold})$	—	3.0	—	V
Residual voltage of display outputs	$V_{9-8(\text{sat})}, V_{11-8(\text{sat})}$ $V_{13-8(\text{sat})}, V_{15-8(\text{sat})}$	—	0.8	1.5	V
Residual voltage of tuning outputs	$V_{3-7(\text{sat})}, V_{4-7(\text{sat})}$ $V_{5-7(\text{sat})}, V_{6-7(\text{sat})}$	—	0.15	0.5	V
Temperature drift of residual voltage of tuning outputs $T_a=25$ to 55°C	$V_{3-7(\text{sat})}, V_{4-7(\text{sat})}$ $V_{5-7(\text{sat})}, V_{6-7(\text{sat})}$	—	0.3	1.0	mV/ $^\circ\text{C}$
Current (holding condition)	$I_7(\text{hold})$	2.5	4.5	5.0	mA
Current (switching condition)	$I_7(\text{sw})$	—	5.0	5.5	mA
Current (no-load condition)	$I_7(\text{no-load})$	—	1.8	2.6	mA
Input current (for switching)	$I_{10}, I_{12}, I_{14}, I_{16}$	—	100	300	nA
Leak current of display outputs	$I_9(\text{leak}), I_{11}(\text{leak})$ $I_{13}(\text{leak}), I_{15}(\text{leak})$	—	—	10	μA
Leak current of tuning outputs	$I_3(\text{leak}), I_4(\text{leak})$ $I_5(\text{leak}), I_6(\text{leak})$	—	—	1	μA

After turning off V_8 , the channel selected last remains stored as long as V_7 is on. Applies only to SAS570S:

After turning on supply voltage V_7 , channel 1 switches on automatically. (Output pin 6 and 9)

■ TEST CIRCUIT

