


Service Manual

Receiver

AV Control Stereo Receiver

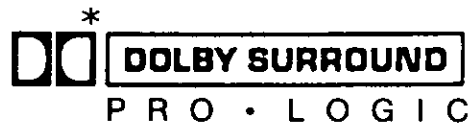

SA-GX505



Color

(K)... Black Type

Area

Country Code	Area	Color
(P)	U.S.A.	(K)
(PC)	Canada.	

* Manufactured under license from Dolby Laboratories Licensing Corporation. Additionally licenced under one or more of the following patents: U.S. numbers 3,632,886, 3,746,792 and 3,959,590; Canadian numbers 1,004,603 and 1,037,877.

"Dolby" and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

SPECIFICATIONS (IHF'78)

■ AMPLIFIER SECTION

**Rated minimum sine wave
RMS power output
20 Hz~20 kHz both channels driven
0.05% total harmonic distortion**
110 W per channel (8 Ω)

**1 kHz continuous power output
both channels driven
0.05% total harmonic distortion** 115 W per channel (8 Ω)

Total harmonic distortion
rated power at 20 Hz~20 kHz 0.05% (8 Ω)
half power at 1 kHz 0.03% (8 Ω)

Dynamic headroom 1.2 dB (8 Ω)
SMPTE intermodulation distortion 0.3% (8 Ω)

Frequency response
PHONO RIAA standard curve ±0.8 dB
CD, VCR 1, VCR 2, TAPE 7 Hz~70 kHz, ±3 dB

Input sensitivity
PHONO 0.4 mV (3 mV, IHF '66)
CD, VCR 1, VCR 2, TAPE 27 mV (200 mV, IHF '66)

S/N (IHF, A)
PHONO 70 dB (80 dB, IHF '66)
CD, VCR 1, VCR 2, TAPE 70 dB (90 dB, IHF '66)

Phono maximum input voltage 160 mV (IHF '66)

Input impedance
PHONO 47 kΩ
CD, VCR 1, VCR 2, TAPE 22 kΩ

Tone controls
BASS 50 Hz, +10~-10 dB
TREBLE 20 kHz, +10~-10 dB

4 band parametric equalizer +10~-10 dB

Loudness control (volume at -30 dB) 50 Hz, +9 dB

Low frequency damping factor 30 (8 Ω)

Load impedance
A or B 4~8 Ω
A and B 8 Ω

■ SURROUND AMPLIFIER SECTION

Power output (Rear) 1 kHz, 10 W (8 Ω)
(T.H.D. 0.8 %)

Power output (Center) 100 Hz~15 kHz, 10 W (8 Ω)
(T.H.D. 0.8 %)

■ FM TUNER SECTION

Frequency range 87.9~107.9 MHz
Sensitivity 11.2 dBf (2 μV, IHF '58)

50 dB quieting sensitivity
MONO 20.2 dBf (5.6 μV, IHF '58)
STEREO 40.2 dBf (56 μV, IHF '58)

Total harmonic distortion
MONO 0.2%
STEREO 0.3%

S/N
MONO 75 dB
STEREO 70 dB

Frequency response 20 Hz~15 kHz, +1 dB, -2 dB

Alternate channel selectivity 65 dB

Capture ratio 1.0 dB

Image rejection at 98 MHz 45 dB

IF rejection at 98 MHz 80 dB

Spurious response rejection at 98 MHz 75 dB


AM suppression 50 dB

Stereo separation
1 kHz 40 dB
10 kHz 30 dB


Carrier leak
19 kHz -35 dB
38 kHz -50 dB


Antenna terminals 300 Ω (balanced)
75 Ω (unbalanced)


Technics

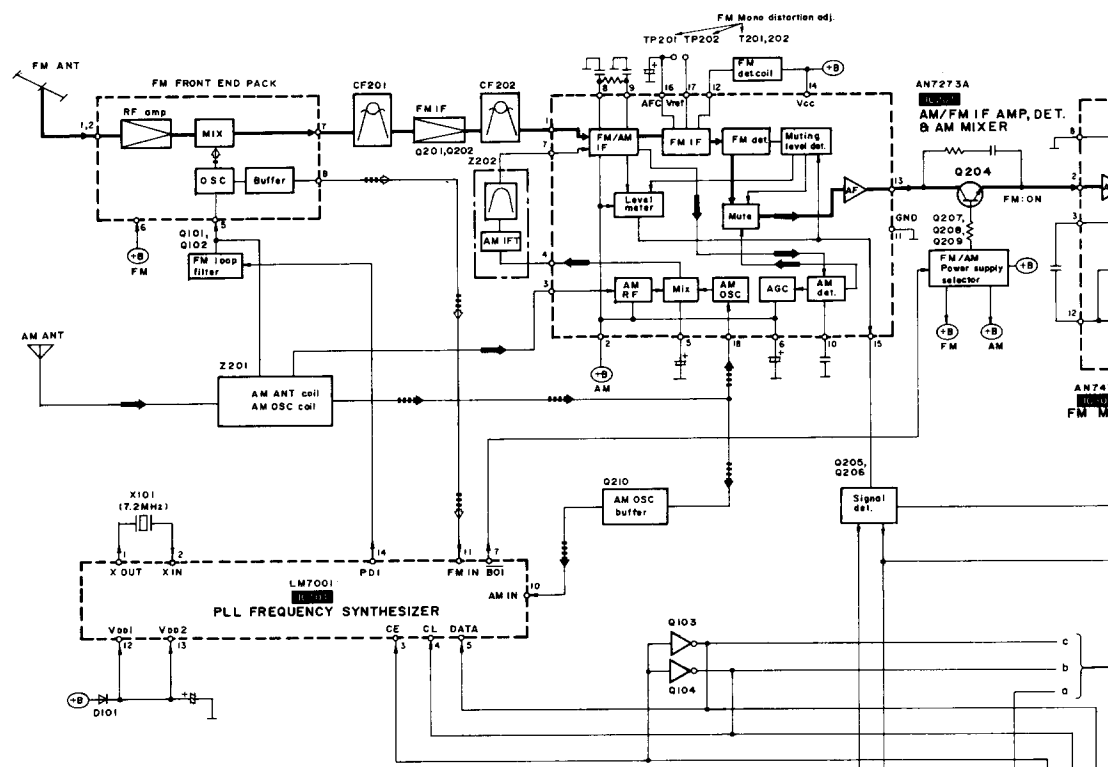


TC4053BP
VIDEO SELECTOR

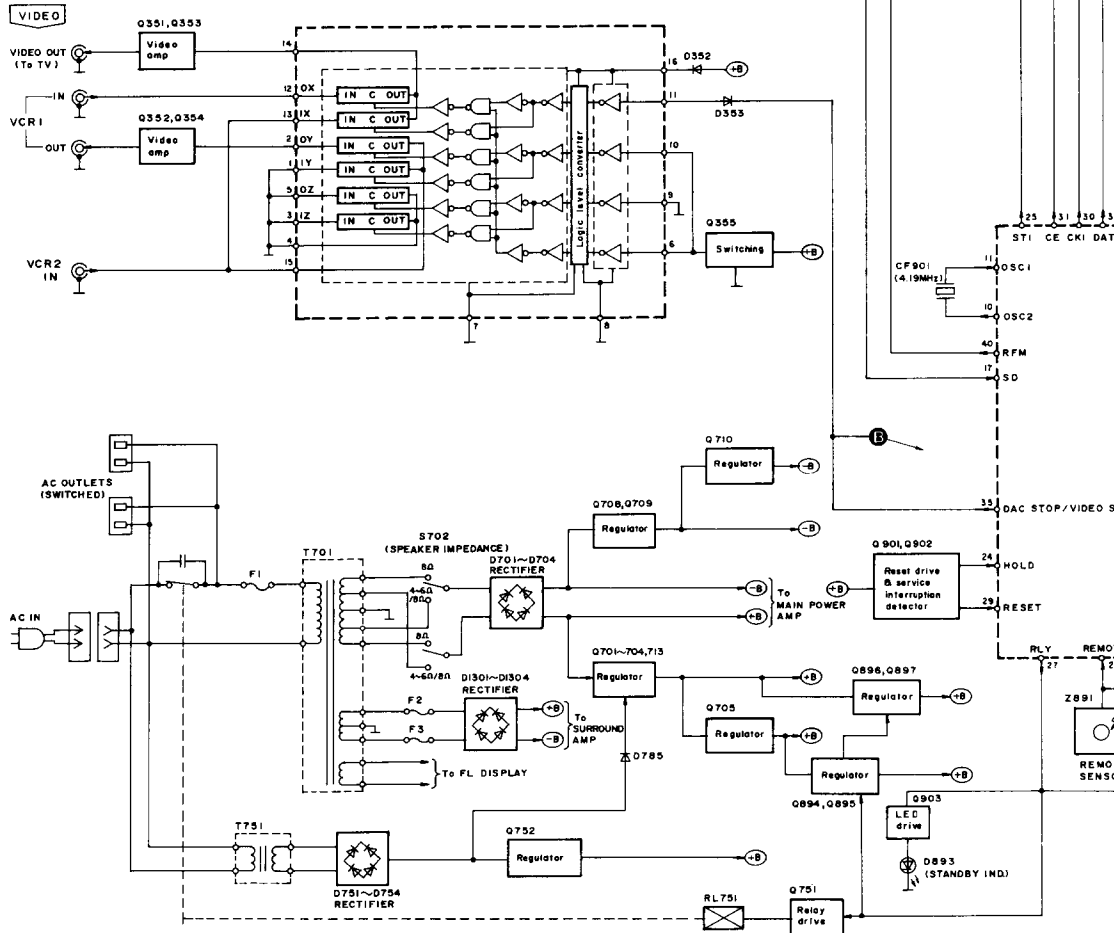

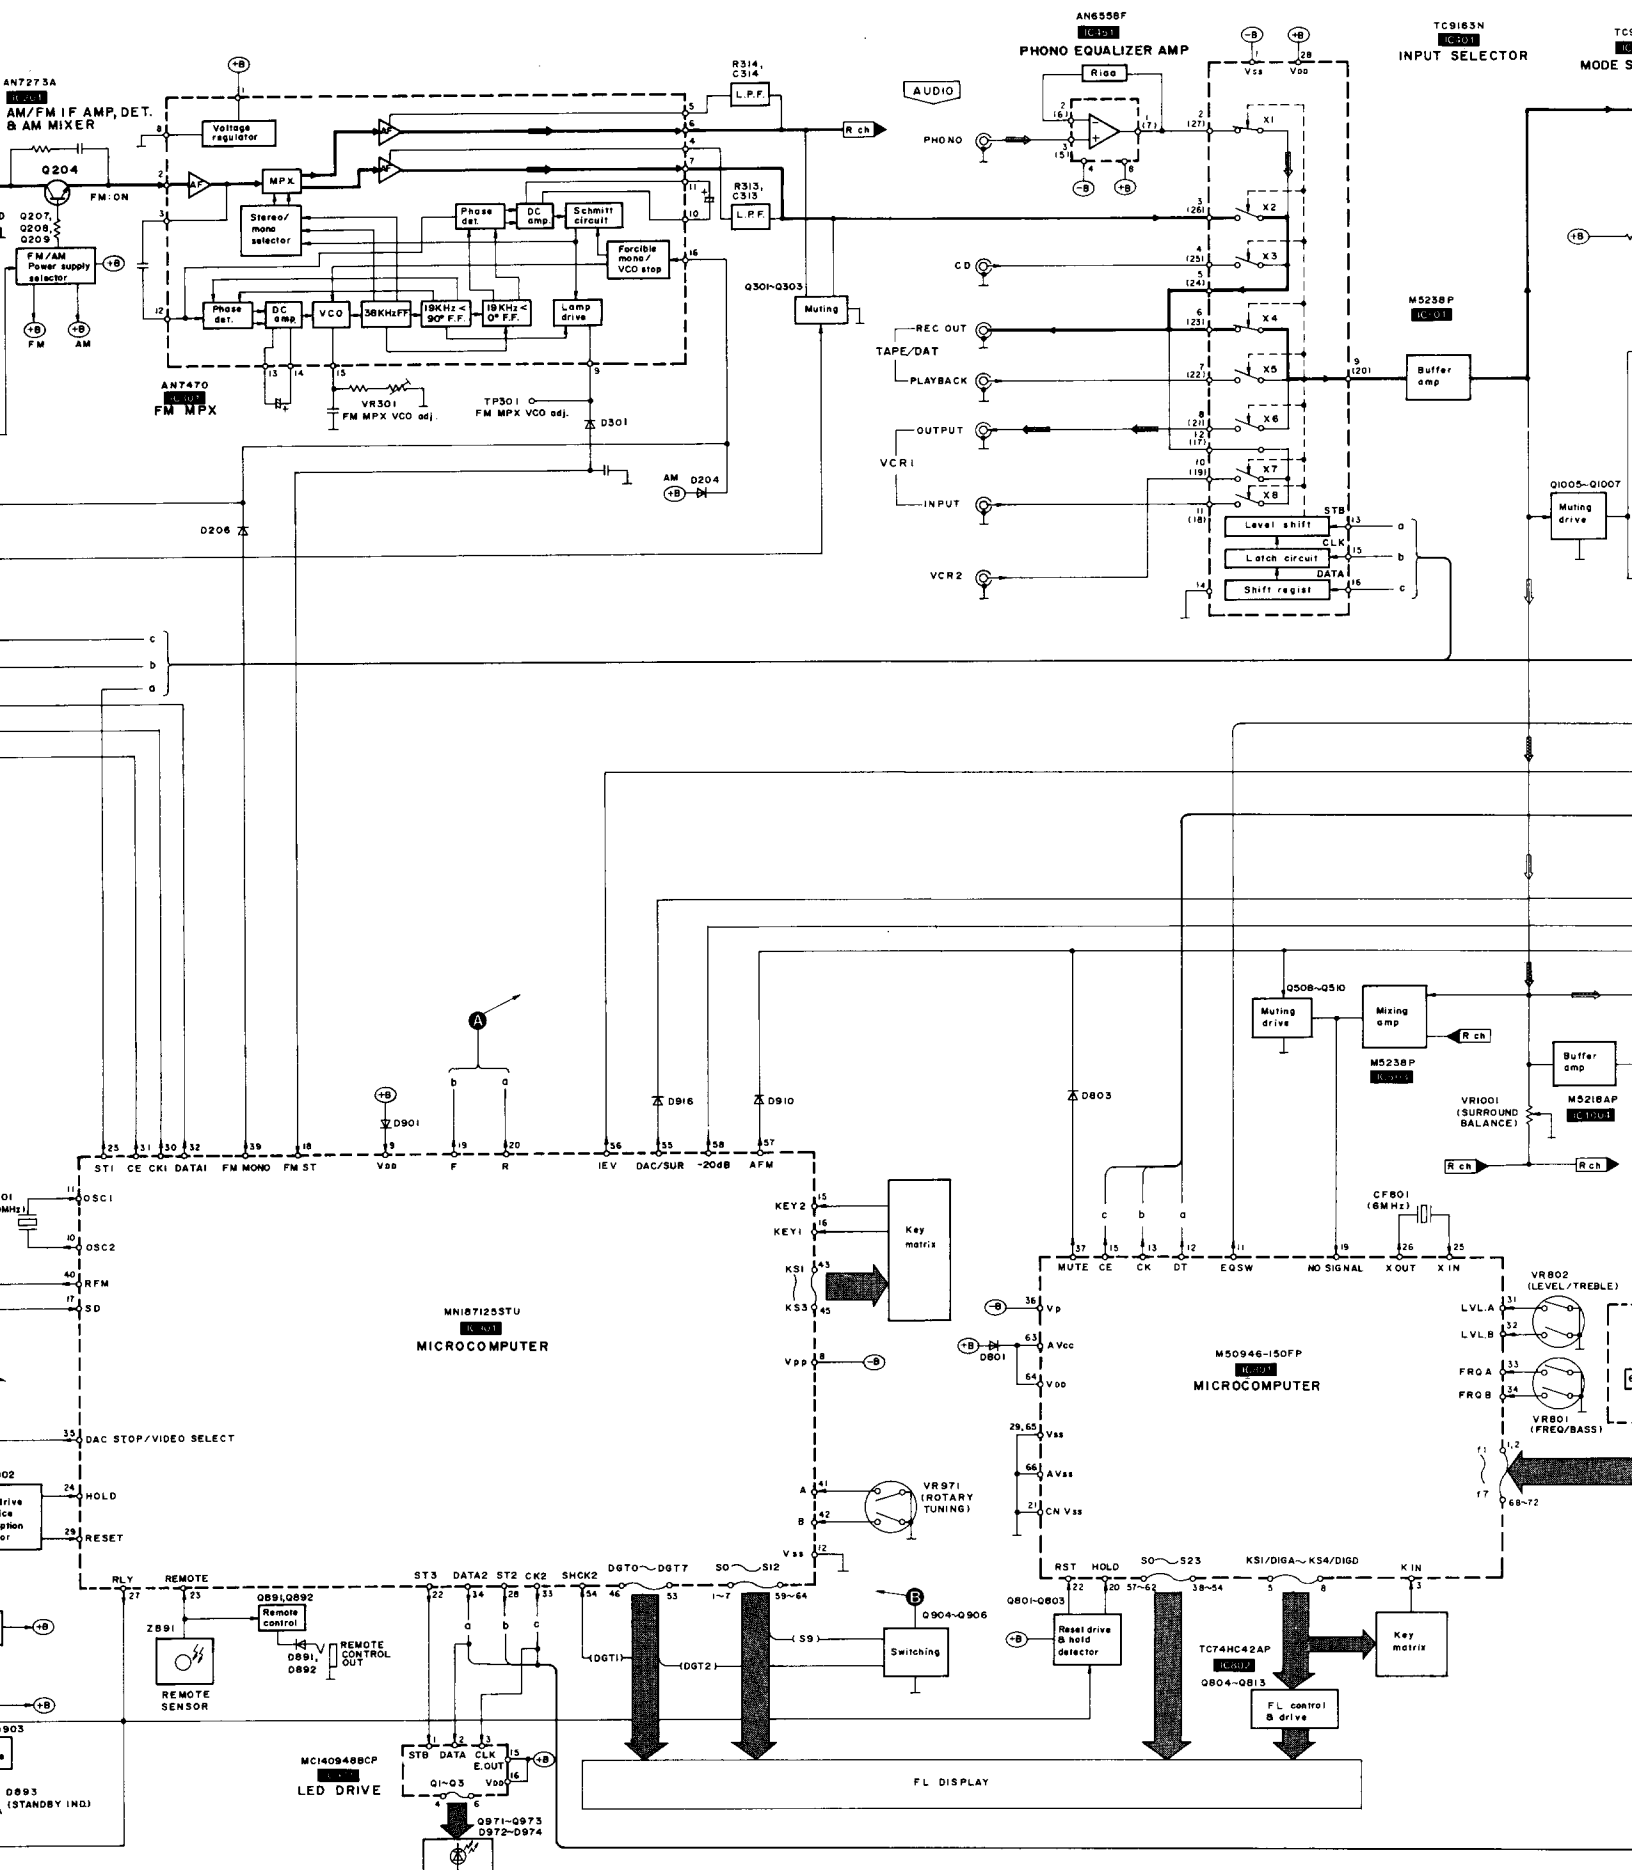

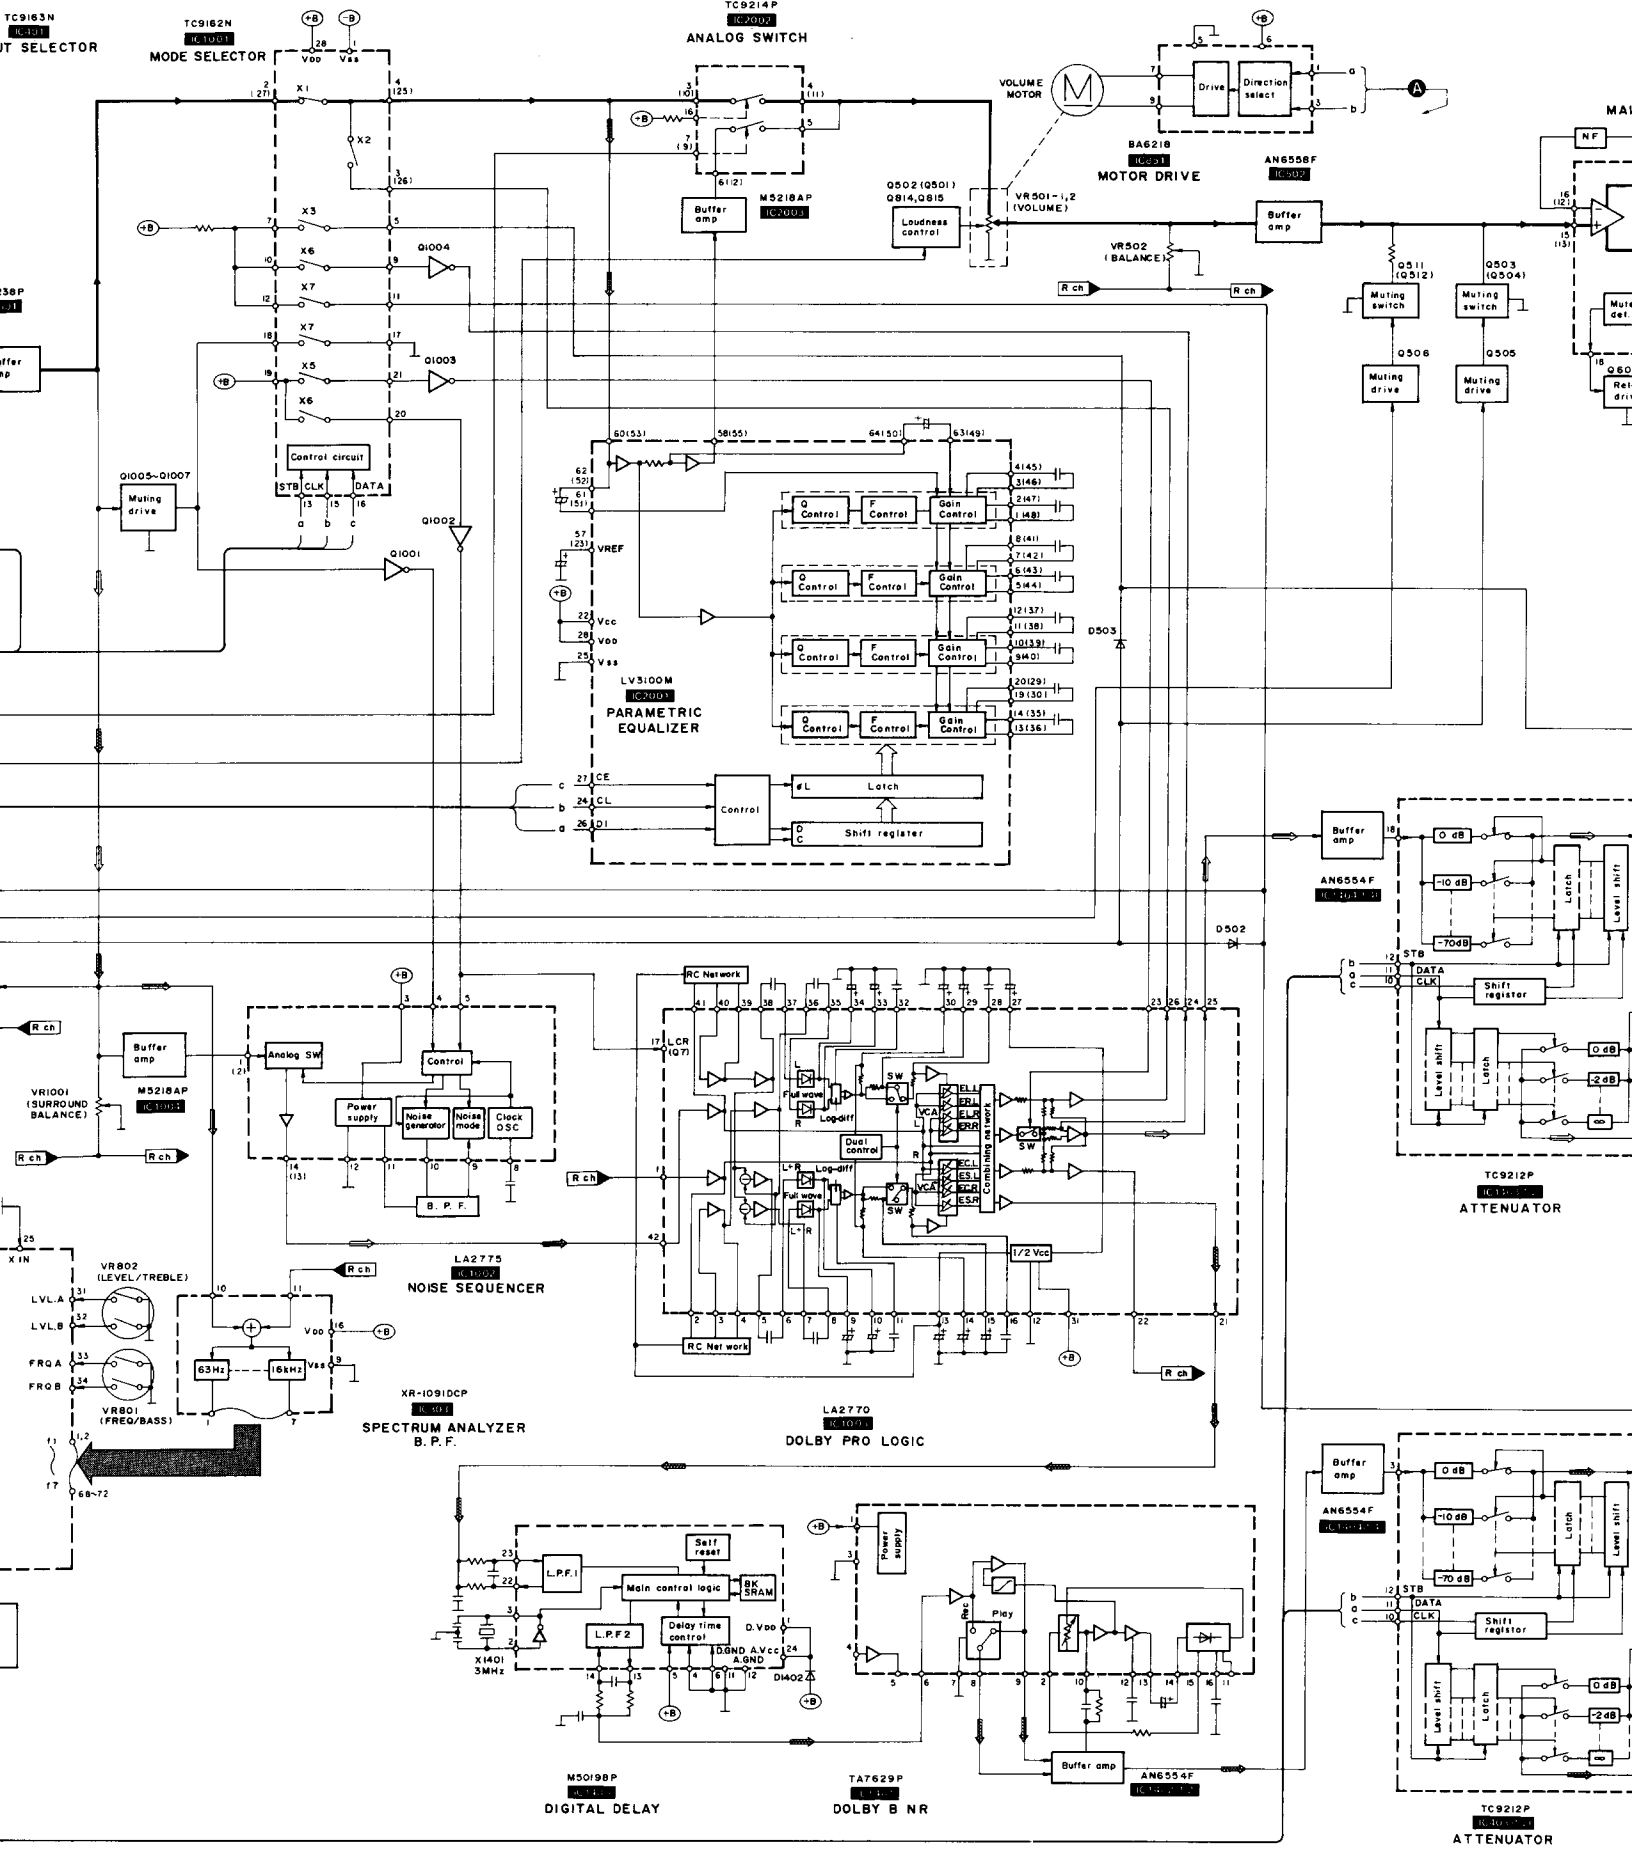

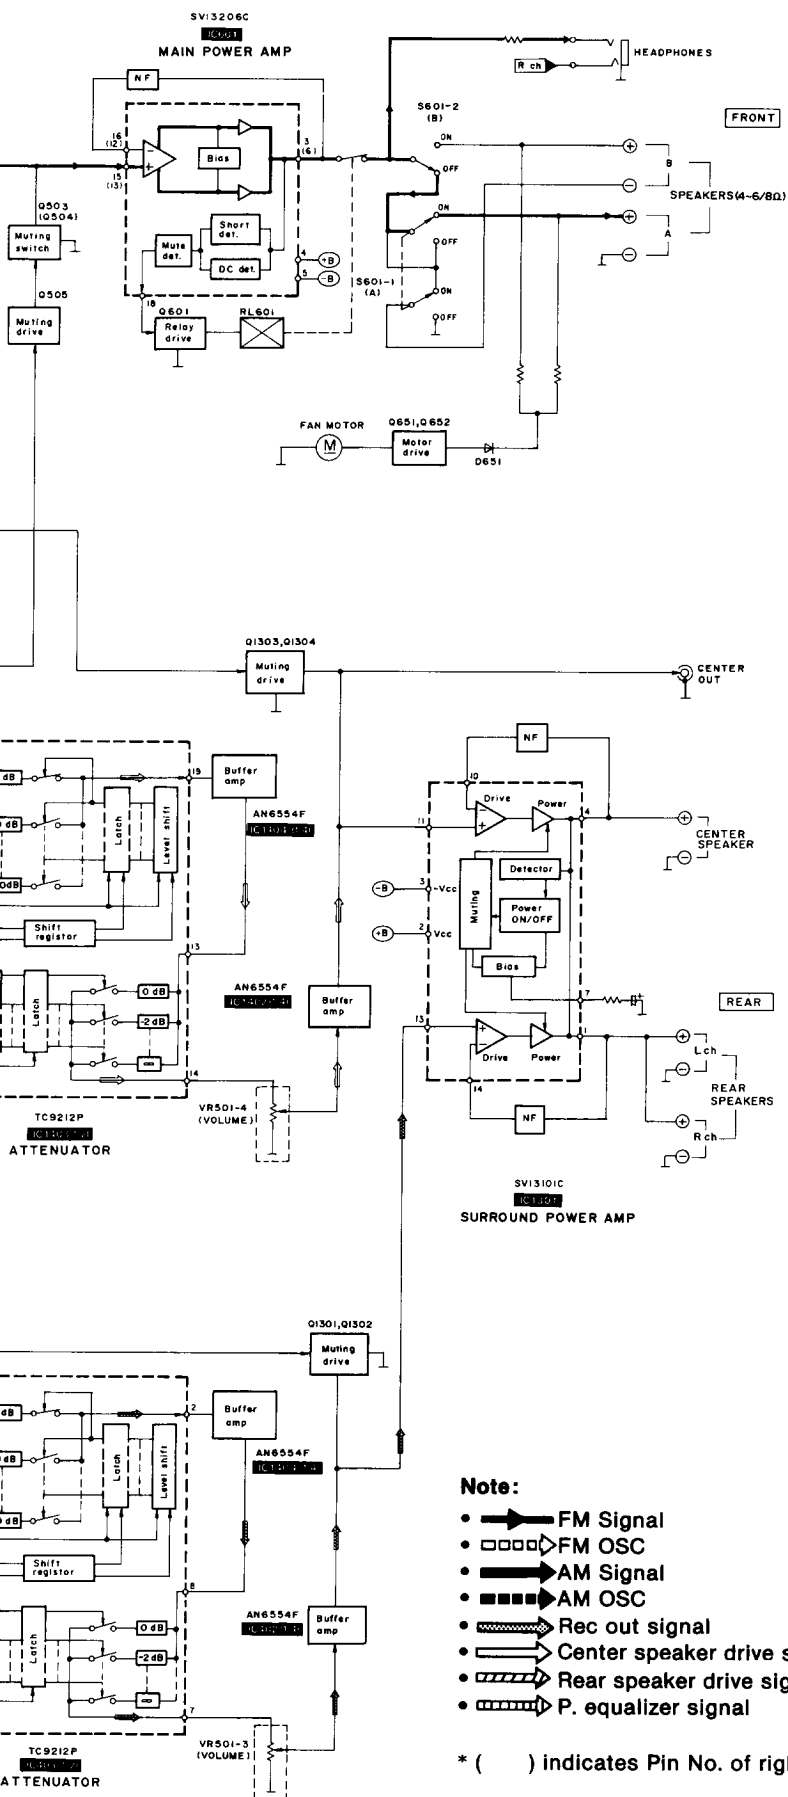

Note:

- FM Signal
- FM OSC
- AM Signal
- AM OSC
- Rec out signal
- Center speaker drive signal
- Rear speaker drive signal
- P. equalizer signal

* () indicates Pin No. of right channel.

• Anode connection table (B)

	1GB	2GB	3GB	4GB	5GB	6GB	7GB	8GB	9GB
P1B	S2	S3	S4	S5	S6	S7	S8	S9 —P.EQ/TONE—	Hz
P2B	B1	B1	B1	B1	B1	B1	B1	M	Dp k
P3B	B2	B2	B2	B2	B2	B2	B2	PRESET	FINE
P4B	B3	B3	B3	B3	B3	B3	B3	◦FIXED	1 a
P5B	B4	B4	B4	B4	B4	B4	B4	◦MANUAL	1 b
P6B	B5	B5	B5	B5	B5	B5	B5	3	1 e
P7B	B6	B6	B6	B6	B6	B6	B6	2	1 f
P8B	B7	B7	B7	B7	B7	B7	B7	1	1 g
P9B	B8	B8	B8	B8	B8	B8	B8	FLAT	2c
P10B	B9	B9	B9	B9	B9	B9	B9	◦P.EQ MODE	2b
P11B	B10	B10	B10	B10	B10	B10	B10	◦TONE MODE	2d
P12B	B11	B11	B11	B11	B11	B11	B11	OFF	2g
P13B	B12	B12	B12	B12	B12	B12	B12	B12	2a
P14B	B13	B13	B13	B13	B13	B13	B13	B13	2e
P15B	B14	B14	B14	B14	B14	B14	B14	B14	2f
P16B	B15	B15	B15	B15	B15	B15	B15	B15	3c
P17B	B16	B16	B16	B16	B16	B16	B16	B16	3b
P18B	B17	B17	B17	B17	B17	B17	B17	B17	3d
P19B	B18	B18	B18	B18	B18	B18	B18	B18	3g
P20B	B19	B19	B19	B19	B19	B19	B19	B19	3a
P21B	B20	B20	B20	B20	B20	B20	B20	B20	3e
P22B	B21	B21	B21	B21	B21	B21	B21	B21	3f
P23B	B22	B22	B22	B22	B22	B22	B22	B22	4b

■ PROTECTION CIRCUITRY

The protection circuitry may have operated if either of the following conditions is noticed:

- No sound is heard when the power is turned on.
- Sound stops during a performance.

The function of this circuitry is to prevent circuitry damage if, for example, the positive and negative speaker connection wires are "shorted", or if speaker systems with an impedance less than the indicated rated impedance of the amplifier are used.

If this occurs, follow the procedure outlines below:

1. Turn off the power.
2. Determine the cause of the problem and correct it.
3. Turn on the power once again after one minute.

Note:

When the protection circuitry functions, the unit will not operate unless the power is first turned off and then on again.

■ BEFORE REPAIR AND ADJUSTMENT

Disconnect AC power, Discharge both Power Supply Capacitors C701 and C702 through a 10Ω, 5W resistor to ground. DO NOT SHORT-CIRCUIT DIRECTLY (with a screwdriver blade, for instance), as this may destroy solid state devices. After repairs are completed, restore power gradually using a variac, to avoid overcurrent. Current consumption at 120V, 60Hz in NO SIGNAL mode should be 0.55~1.3A.

1

2

3

4

5

C PARAMETRIC EQ CIRCUIT

A


B

C

D

E

F

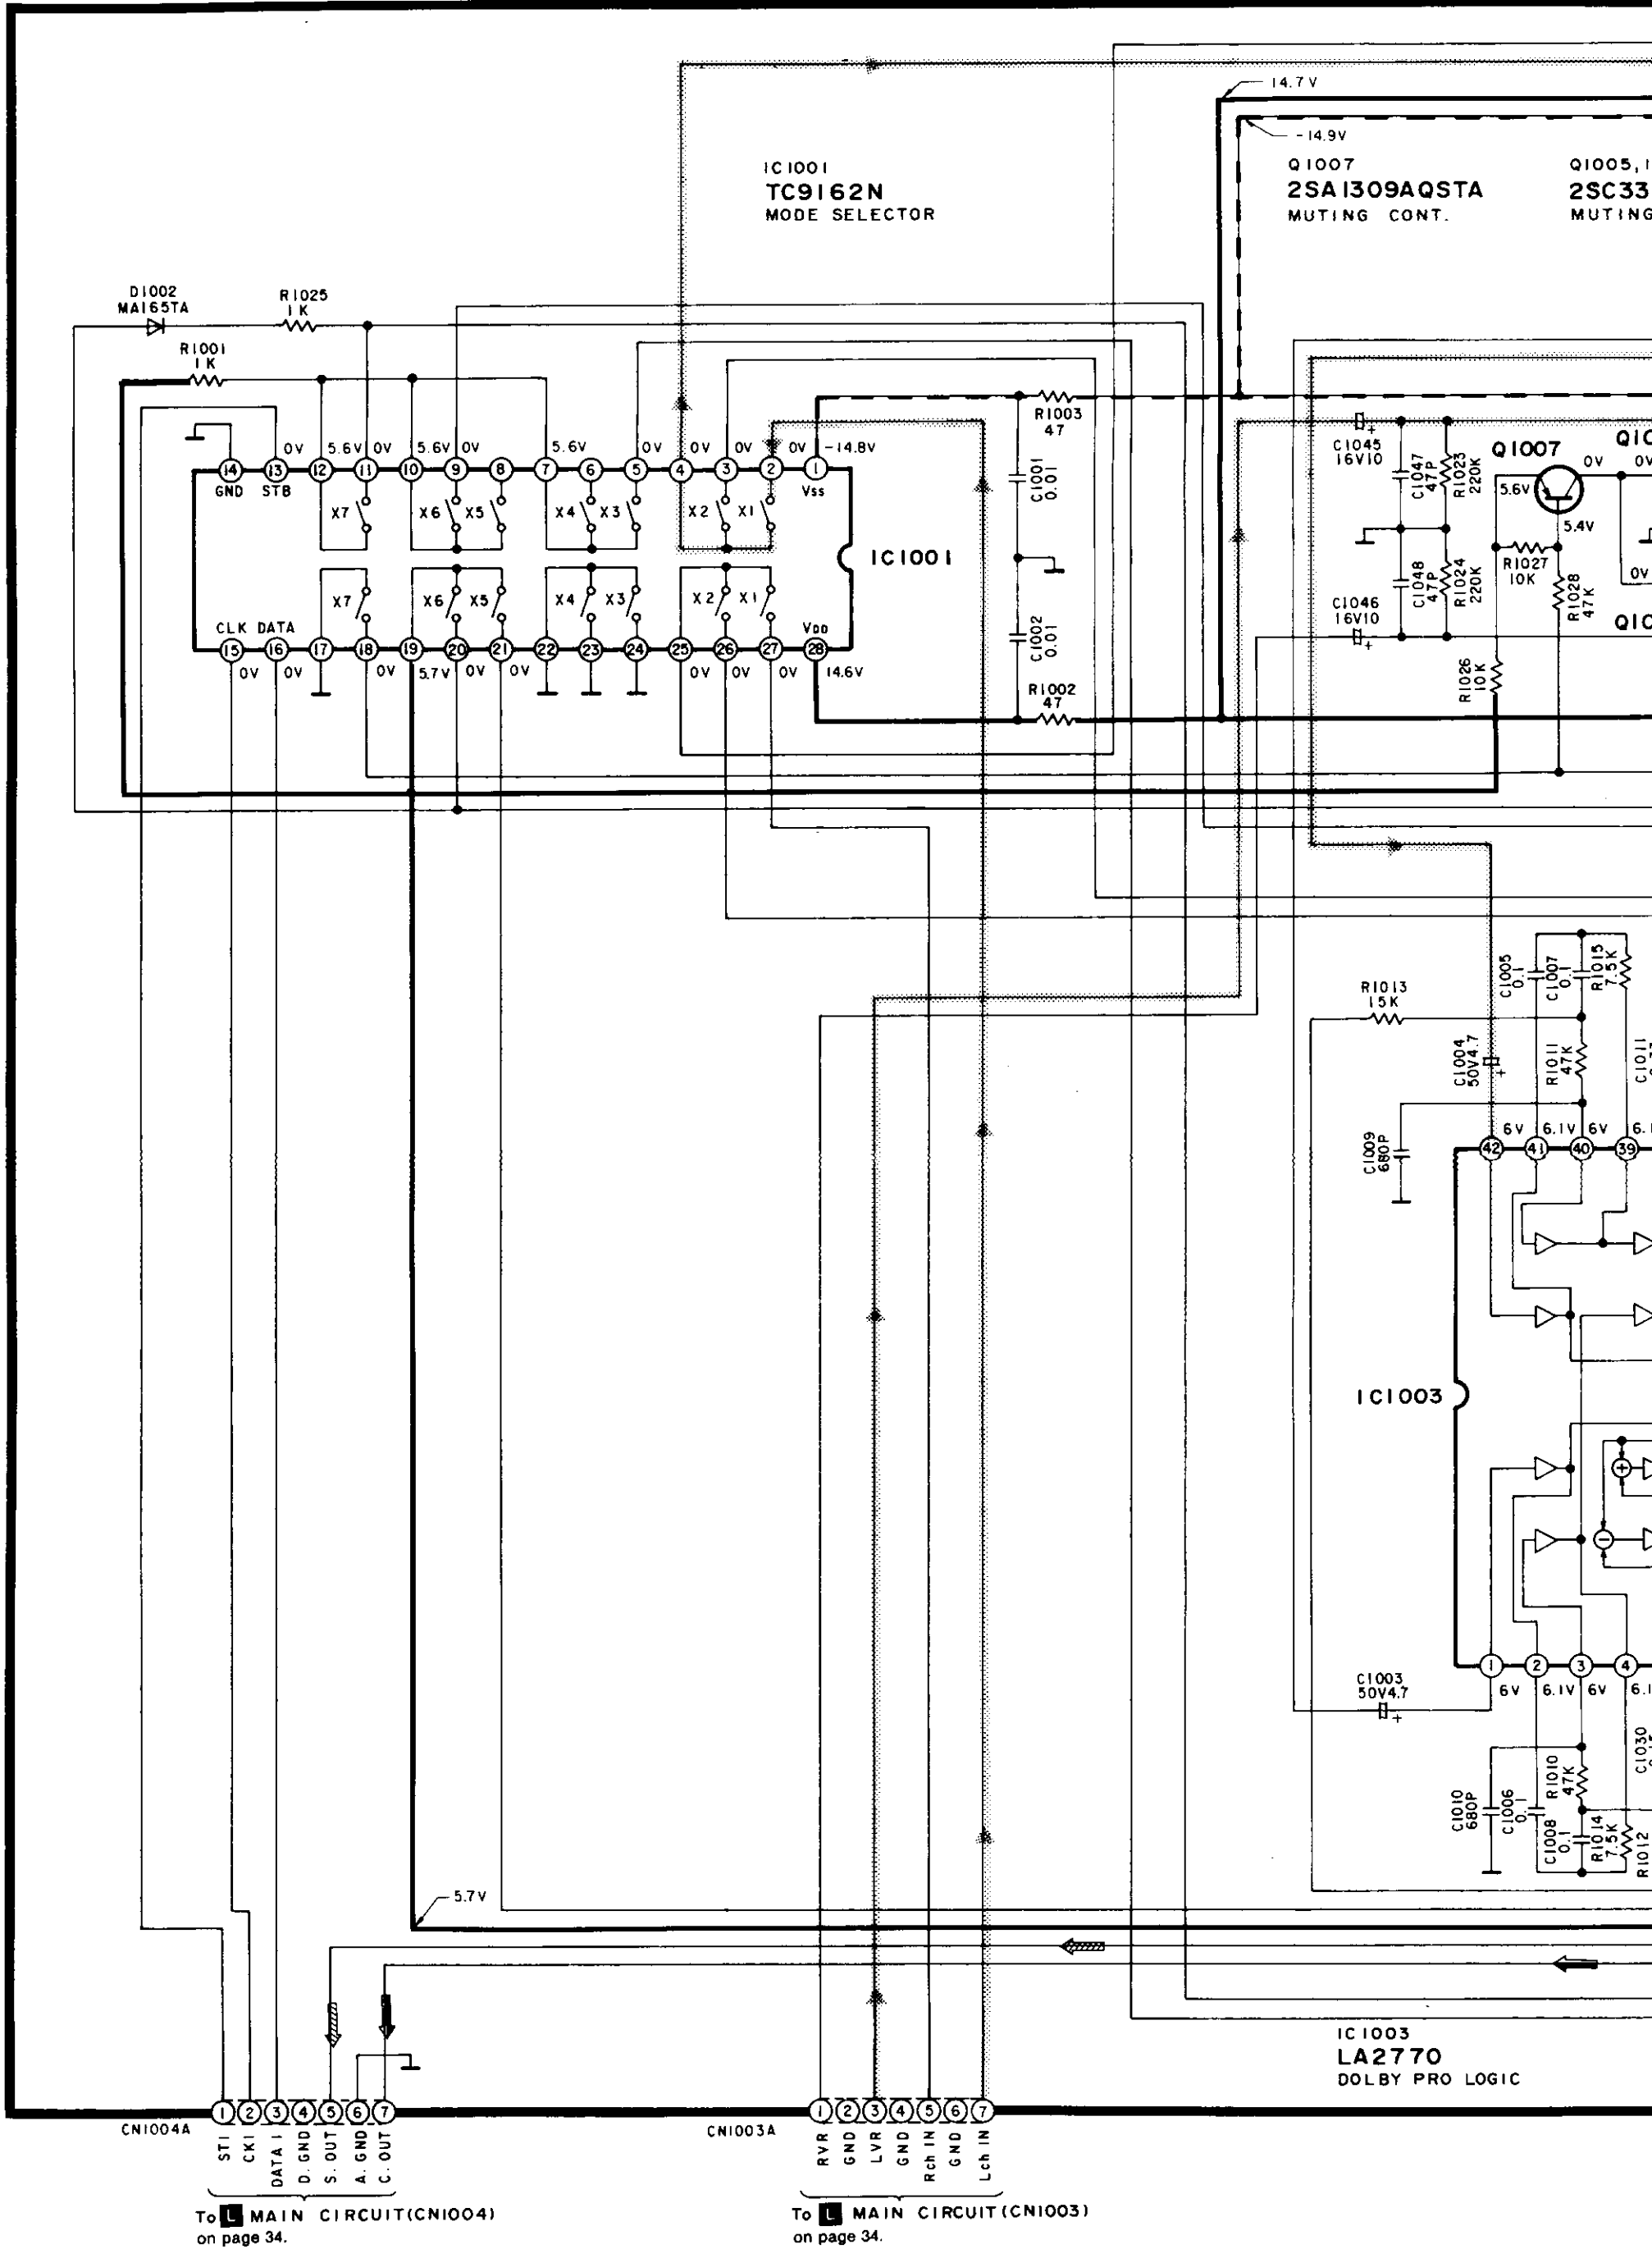

CN1004A 1 2 3 4 5 6 7
 STI CKI DATA I D. GND S. OUT A. GND C. OUT
 To MAIN CIRCUIT (CN1004) on page 34.

CN1003A 1 2 3 4 5 6 7
 RVR GND LVR GND Rch IN GND Lch IN
 To MAIN CIRCUIT (CN1003) on page 34.

09AQSTA
CONT.
Q1005, 1006
2SC3327ABTP
MUTING

IC1004
M5218AP
BUFFER AMP


IC1002
LA2775
NOISE
SEQUENCER

Q1001 ~ 1003
UN4211TA
SWITCHING

Q1004
2SC1740SQSTA
SWITCHING


IC2002
TC9214P
ANALOG SWITCH

003
2770
BY PRO LOGIC

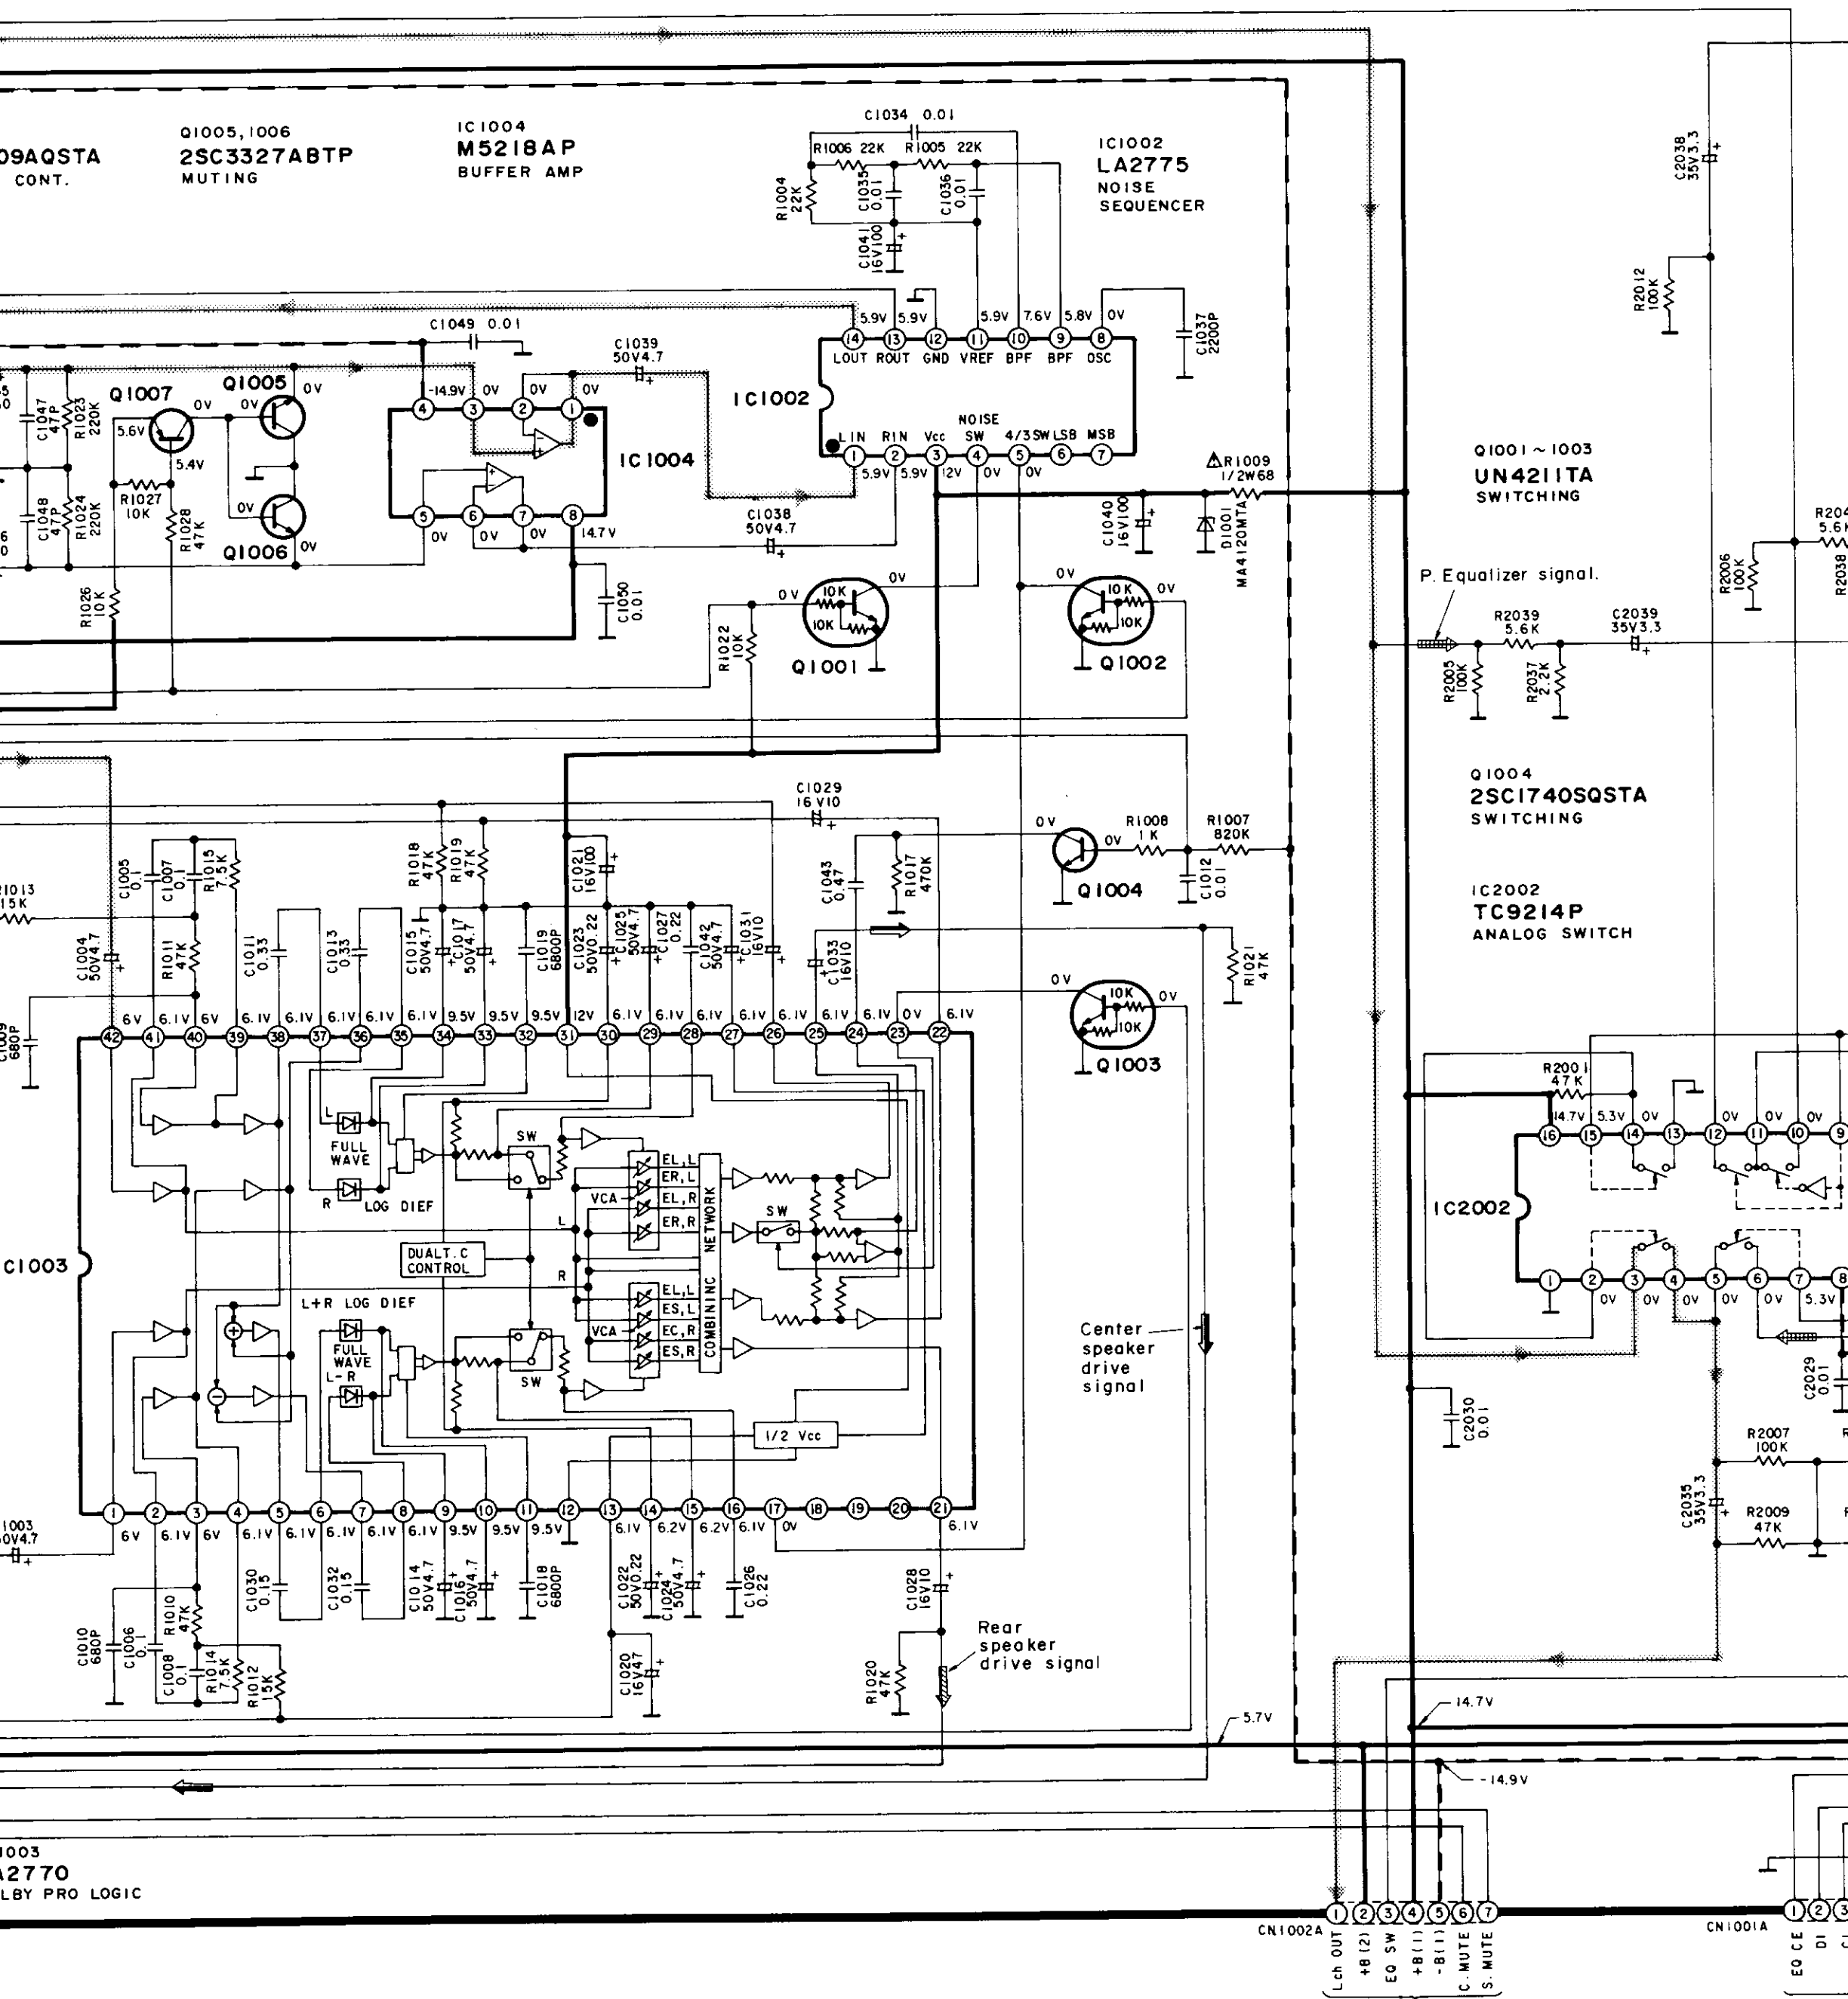

To MAIN CIRCUIT(CN1002)
on page 34.

To MAIN
on page 33.

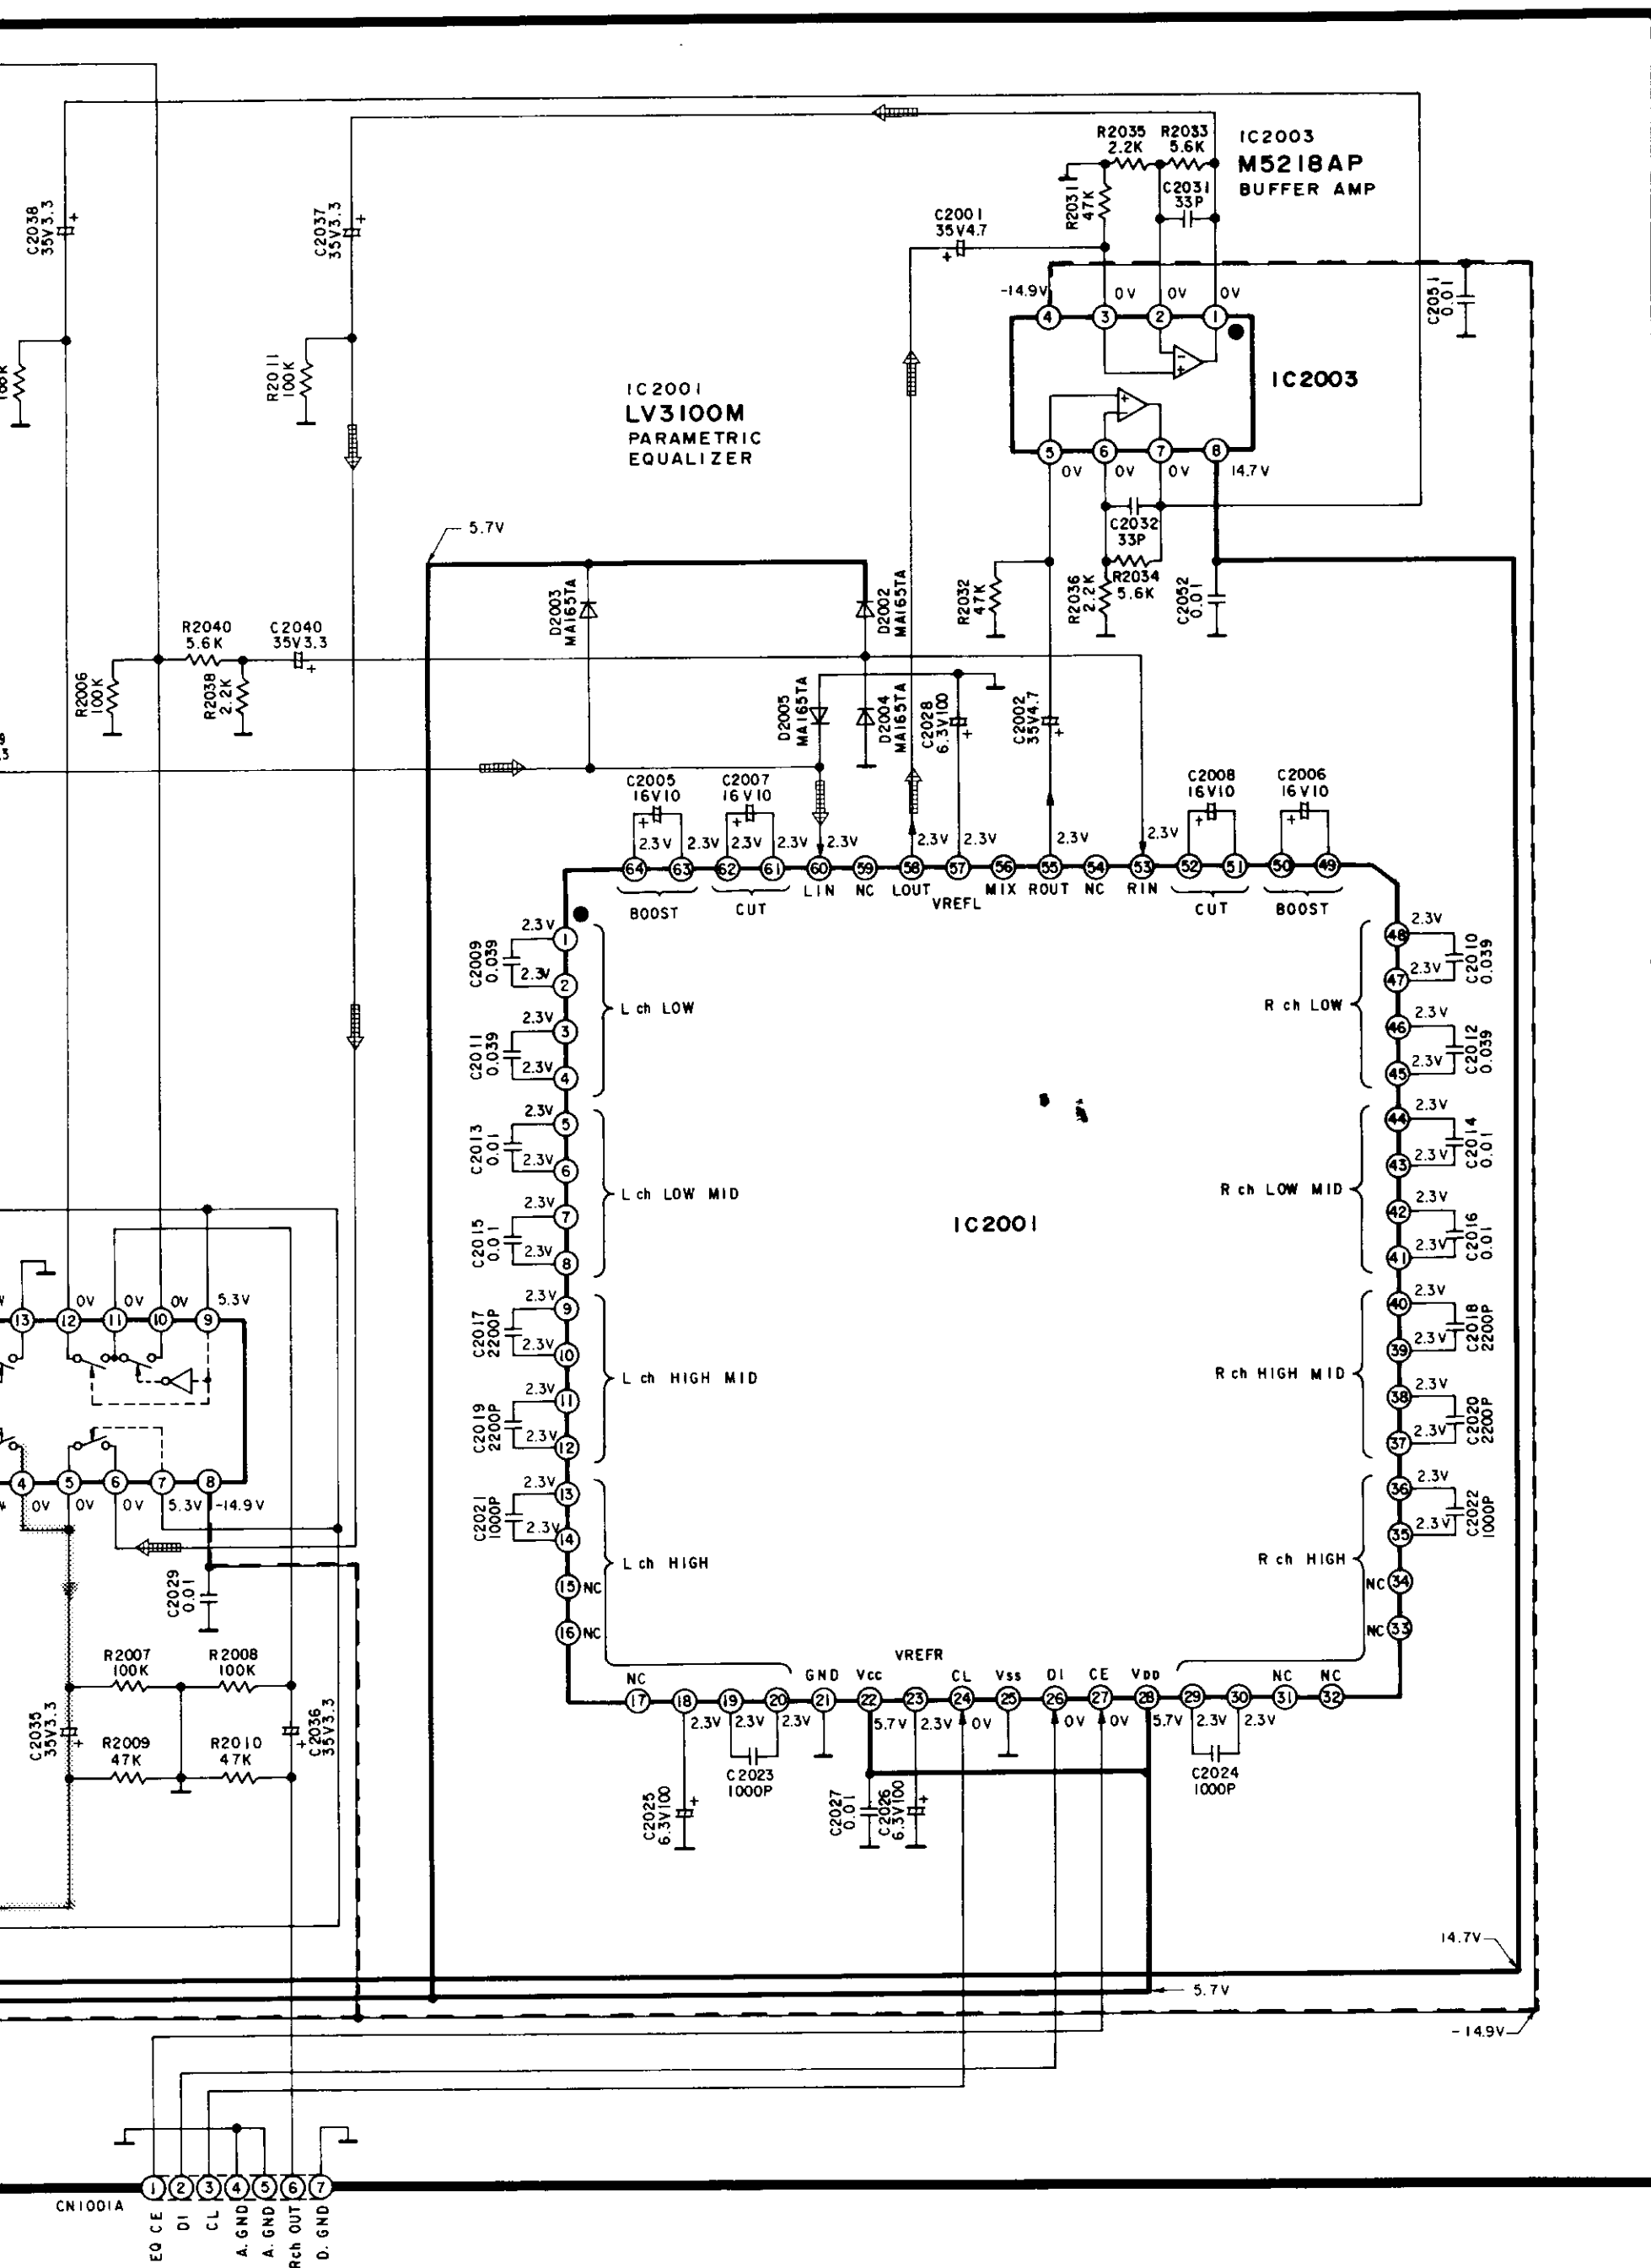

To MAIN CIRCUIT (CN1001) on page 33.

1

2

3

4

5

A

B

C

D

E

F


F FL DRIVE CIRCUIT

E TUNING VOLUME CIRCUIT


To **MAIN** CIRCUIT (CN901) on page 31.



To **MAIN** CIRCUIT (CN902) on page 31.

To **MAIN** CIRCUIT (CN903) on page 31.

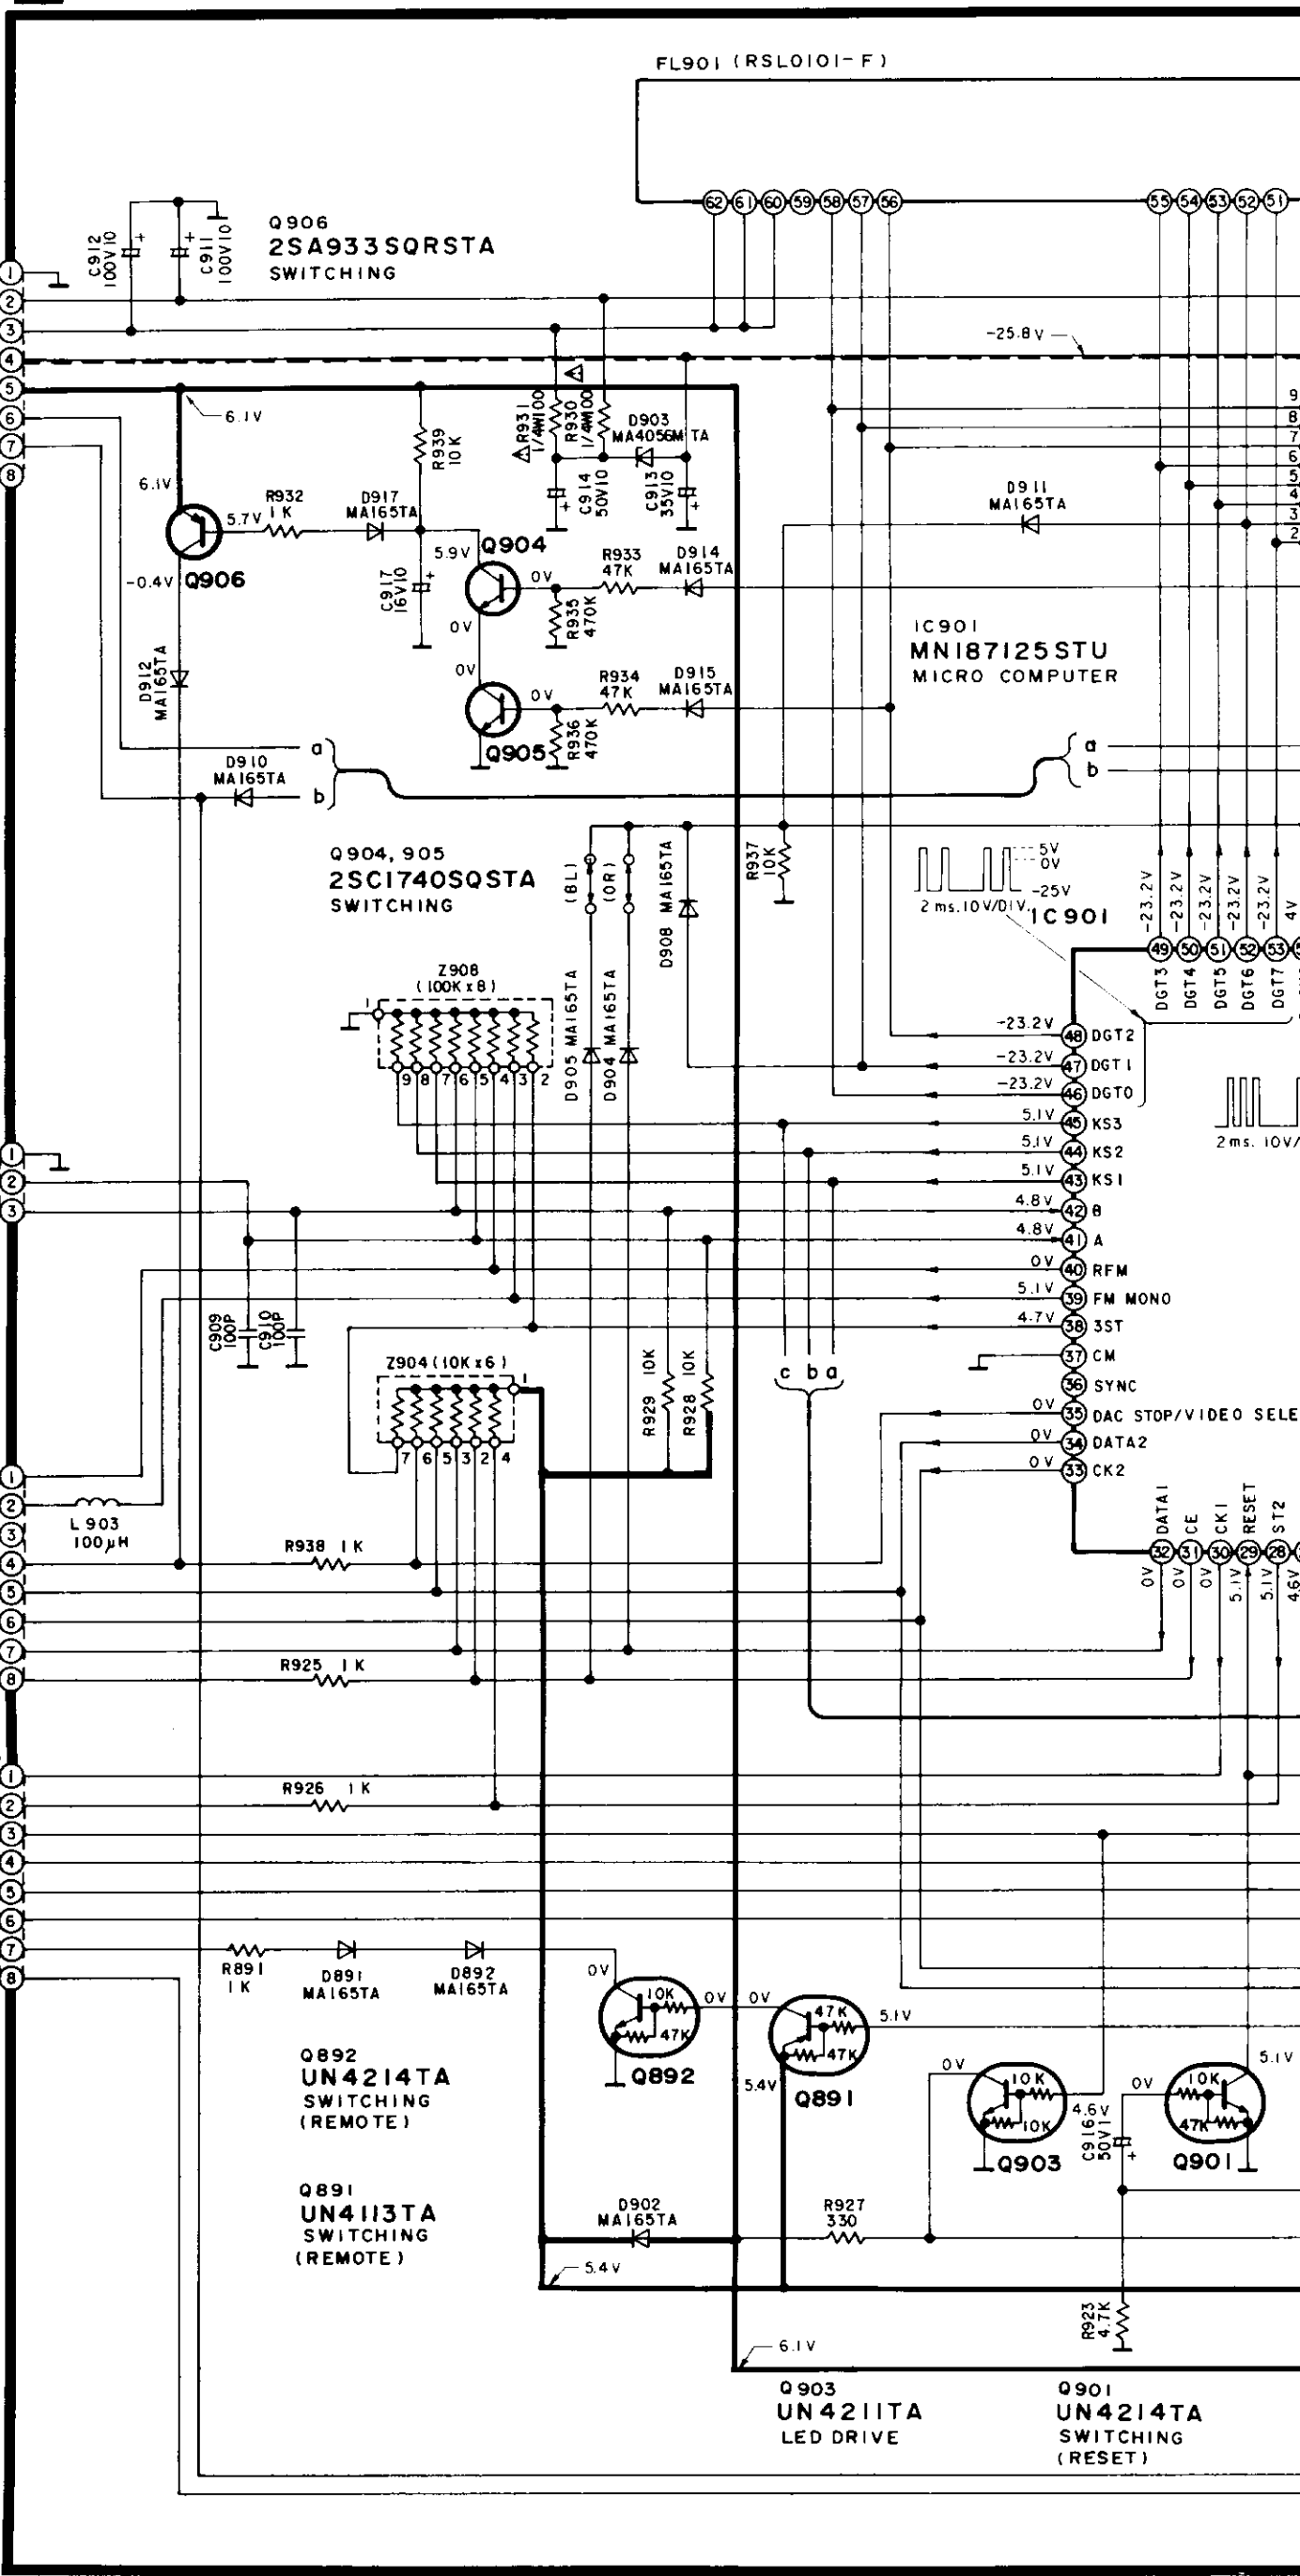



FL DISPLAY

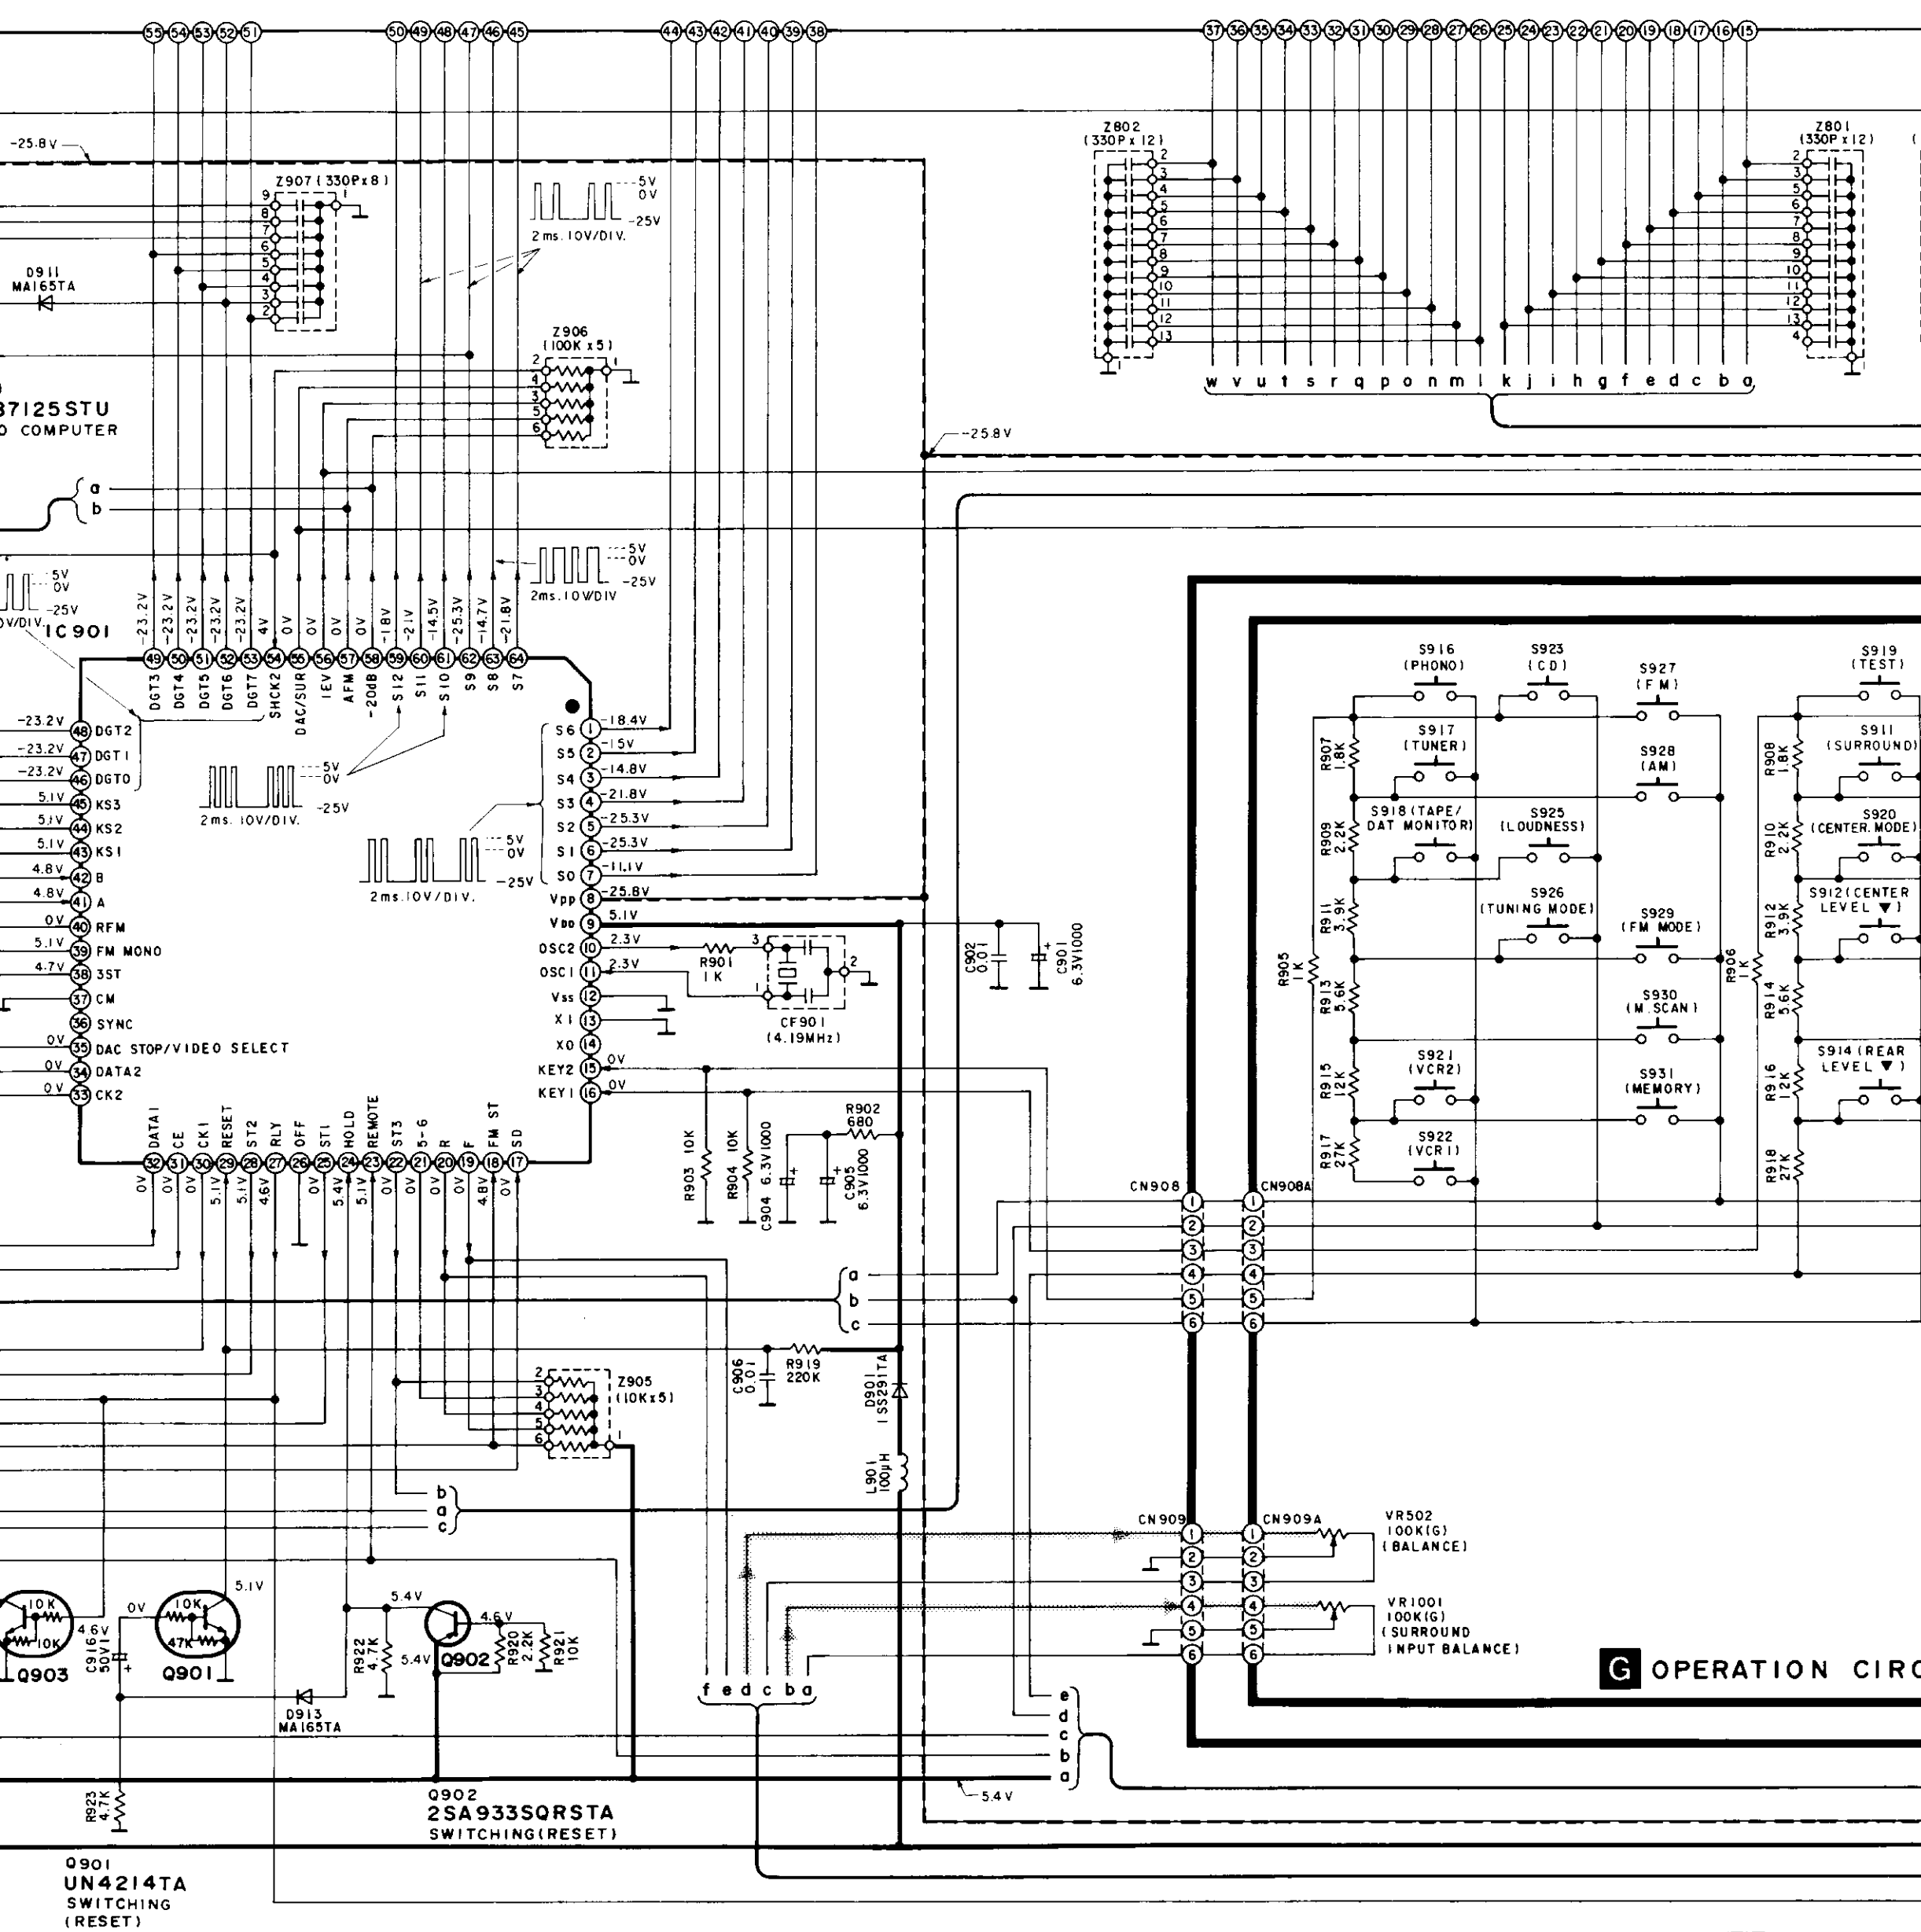

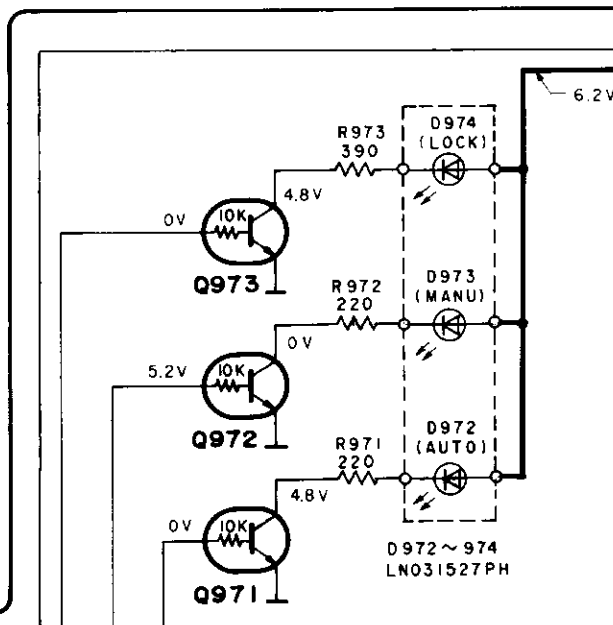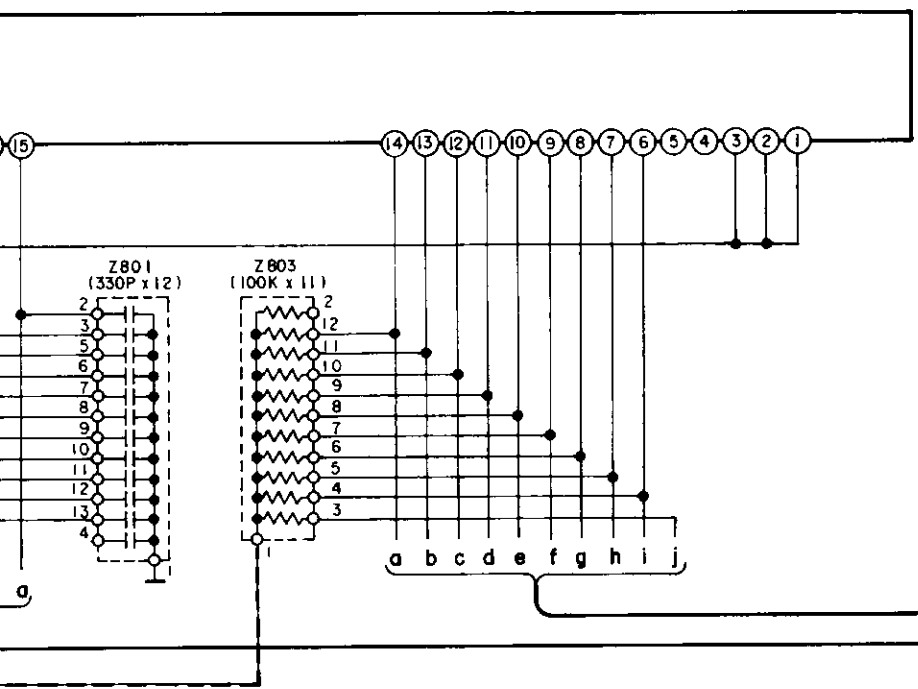

Q971~973
UN4215TA
LED DRIVE


IC971
MC14094BCP
LED DRIVE

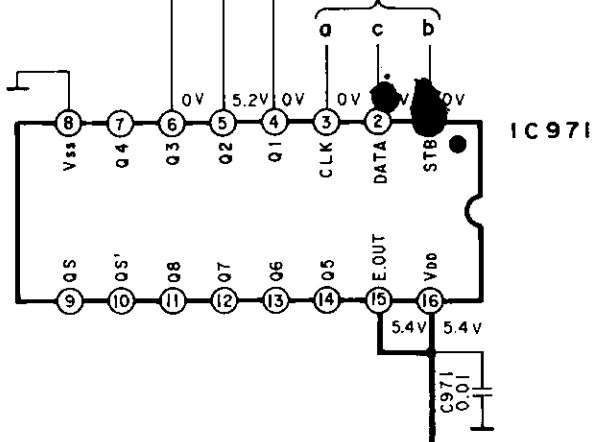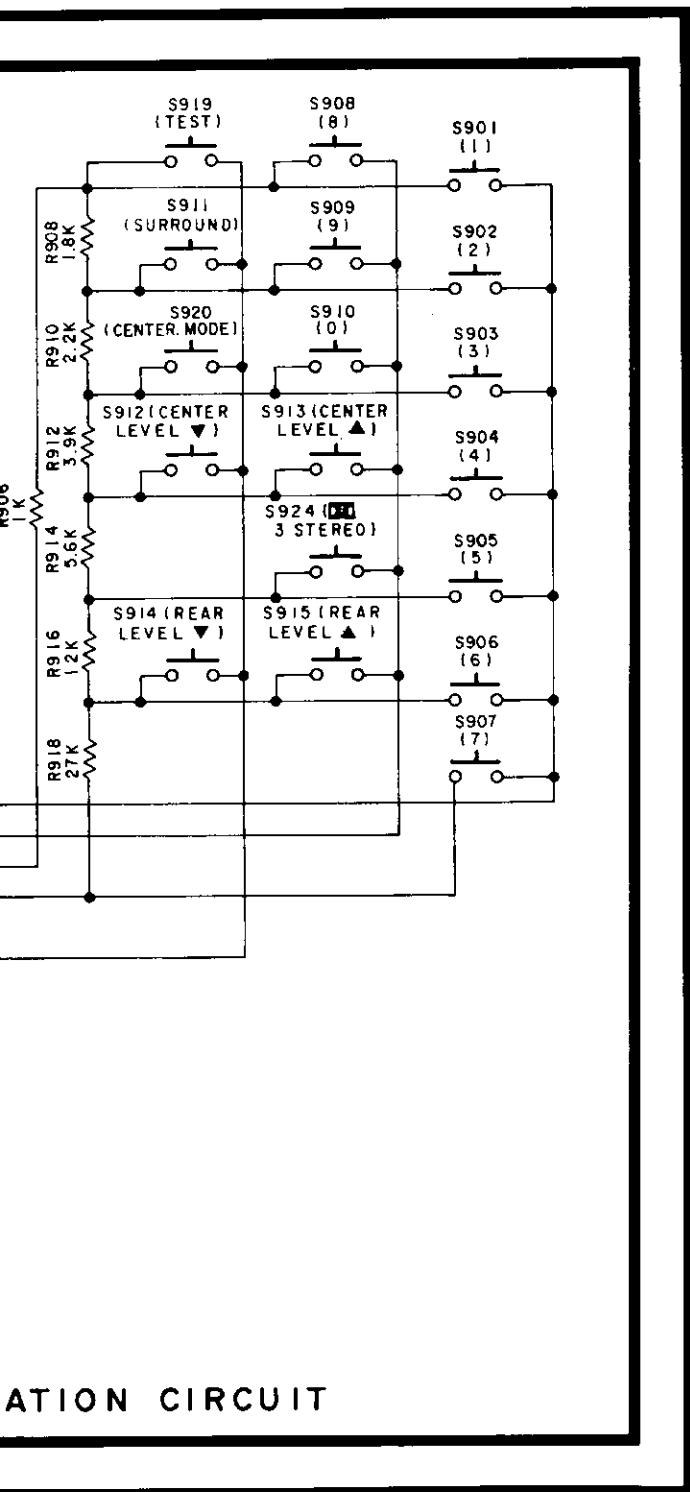


D916
MA165TA

-25.8V


6.1V

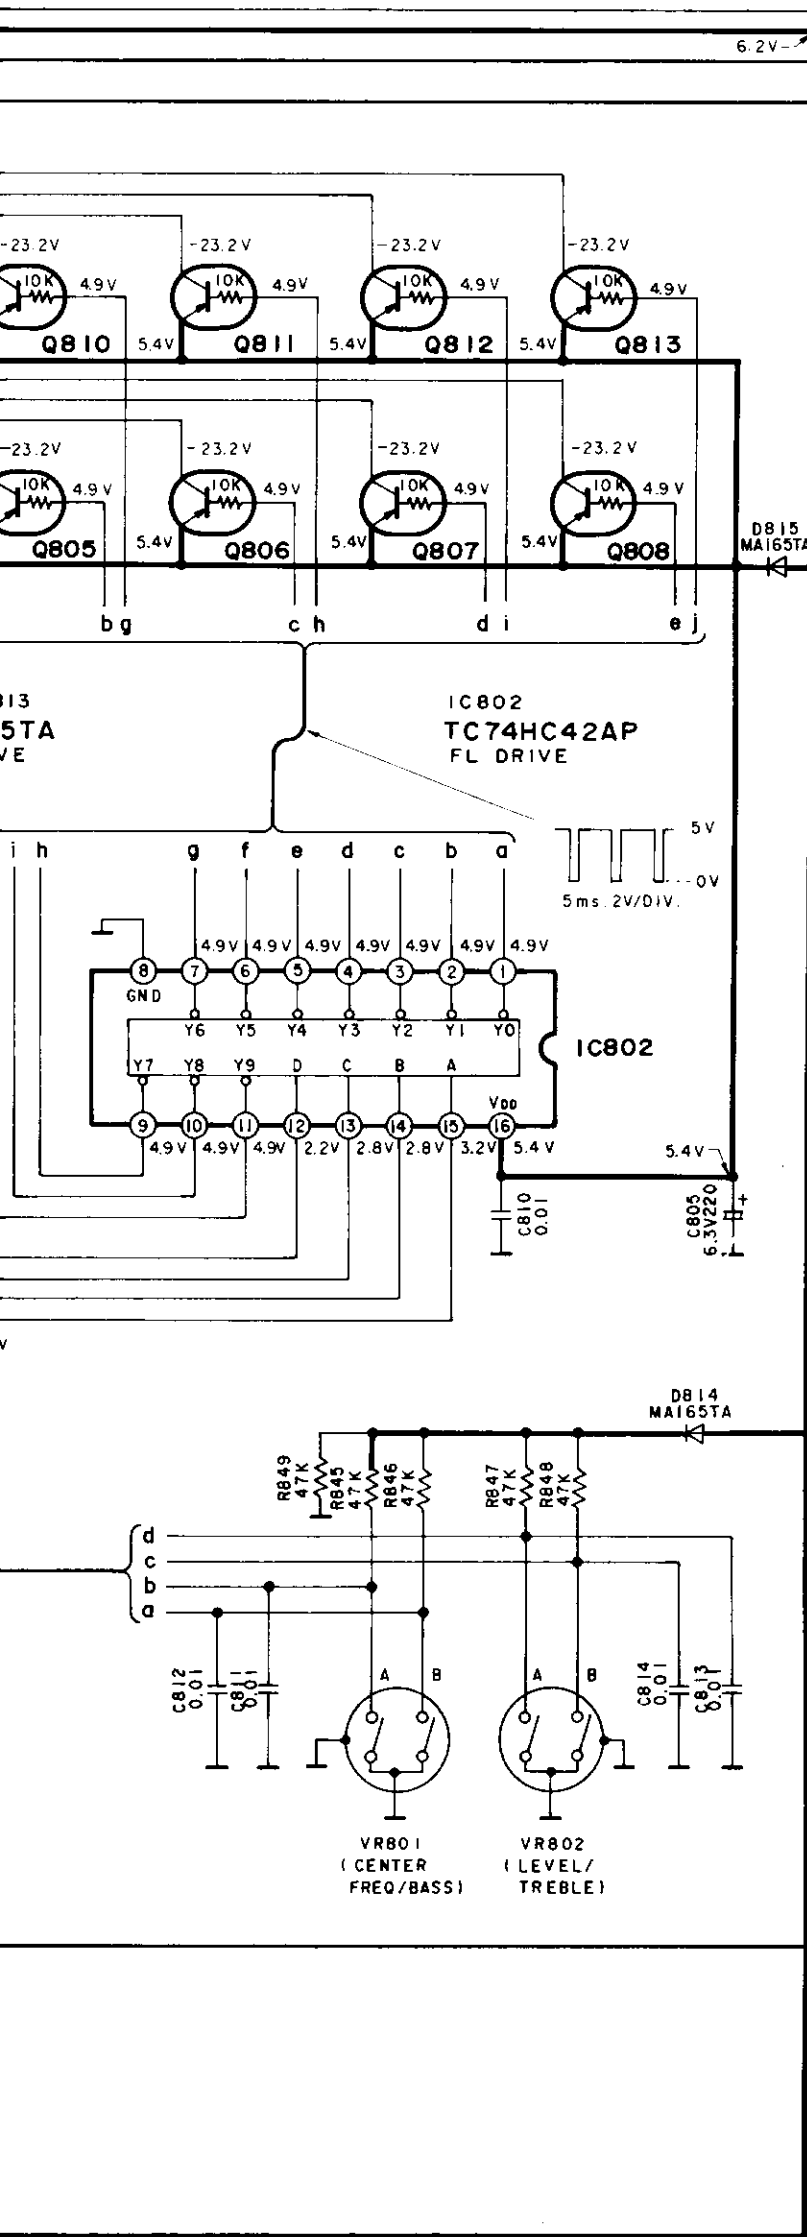

H P.EQ/TONE CIRCUIT

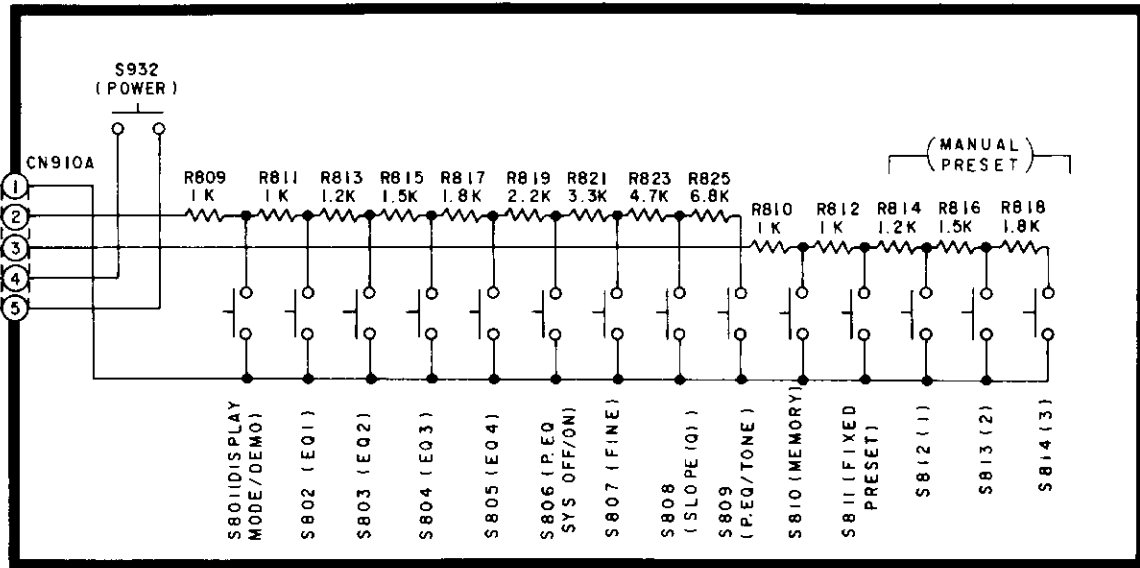


I REMOTE SENSOR CIRCUIT

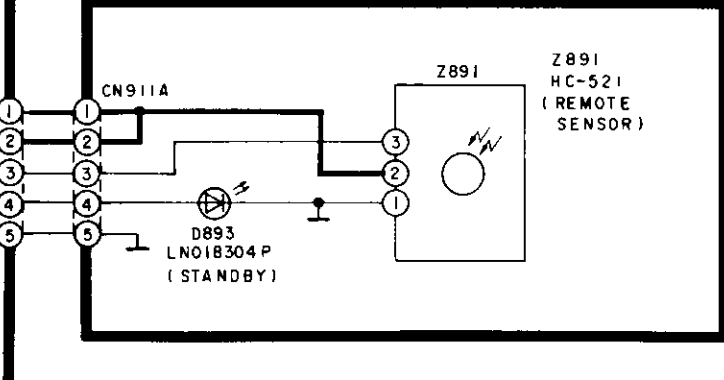

Q814, 815
UN4211TA
SWITCHING
(LOUDNESS)


IC803
XR-1091DCP
SPECTRUM
ANALYZER B.P.F.

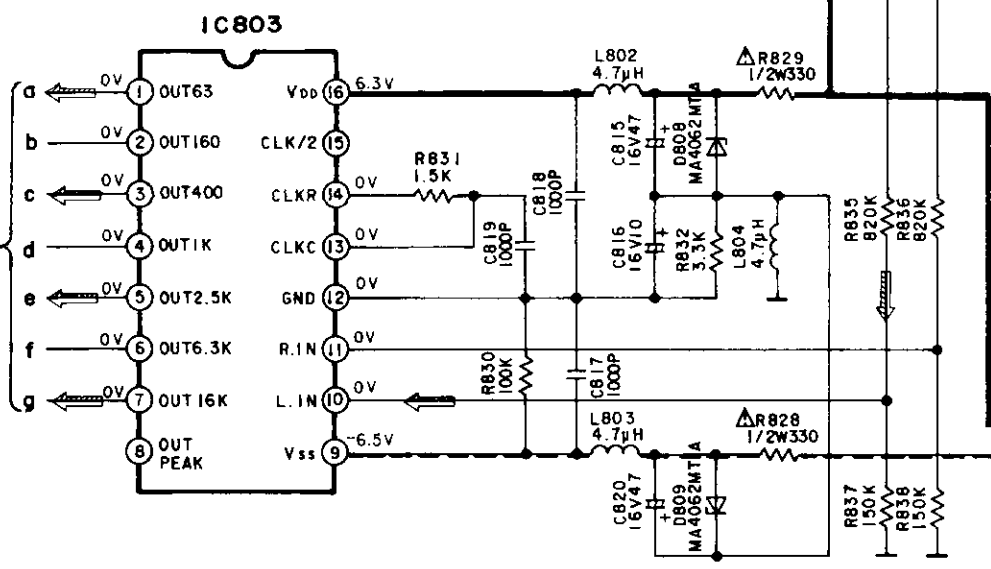


Spectrum analyzer signal

J VOLUME CIRCUIT


(MANUAL PRESET)

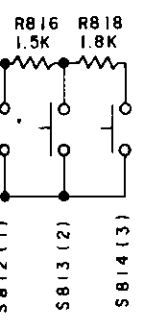

SENSOR



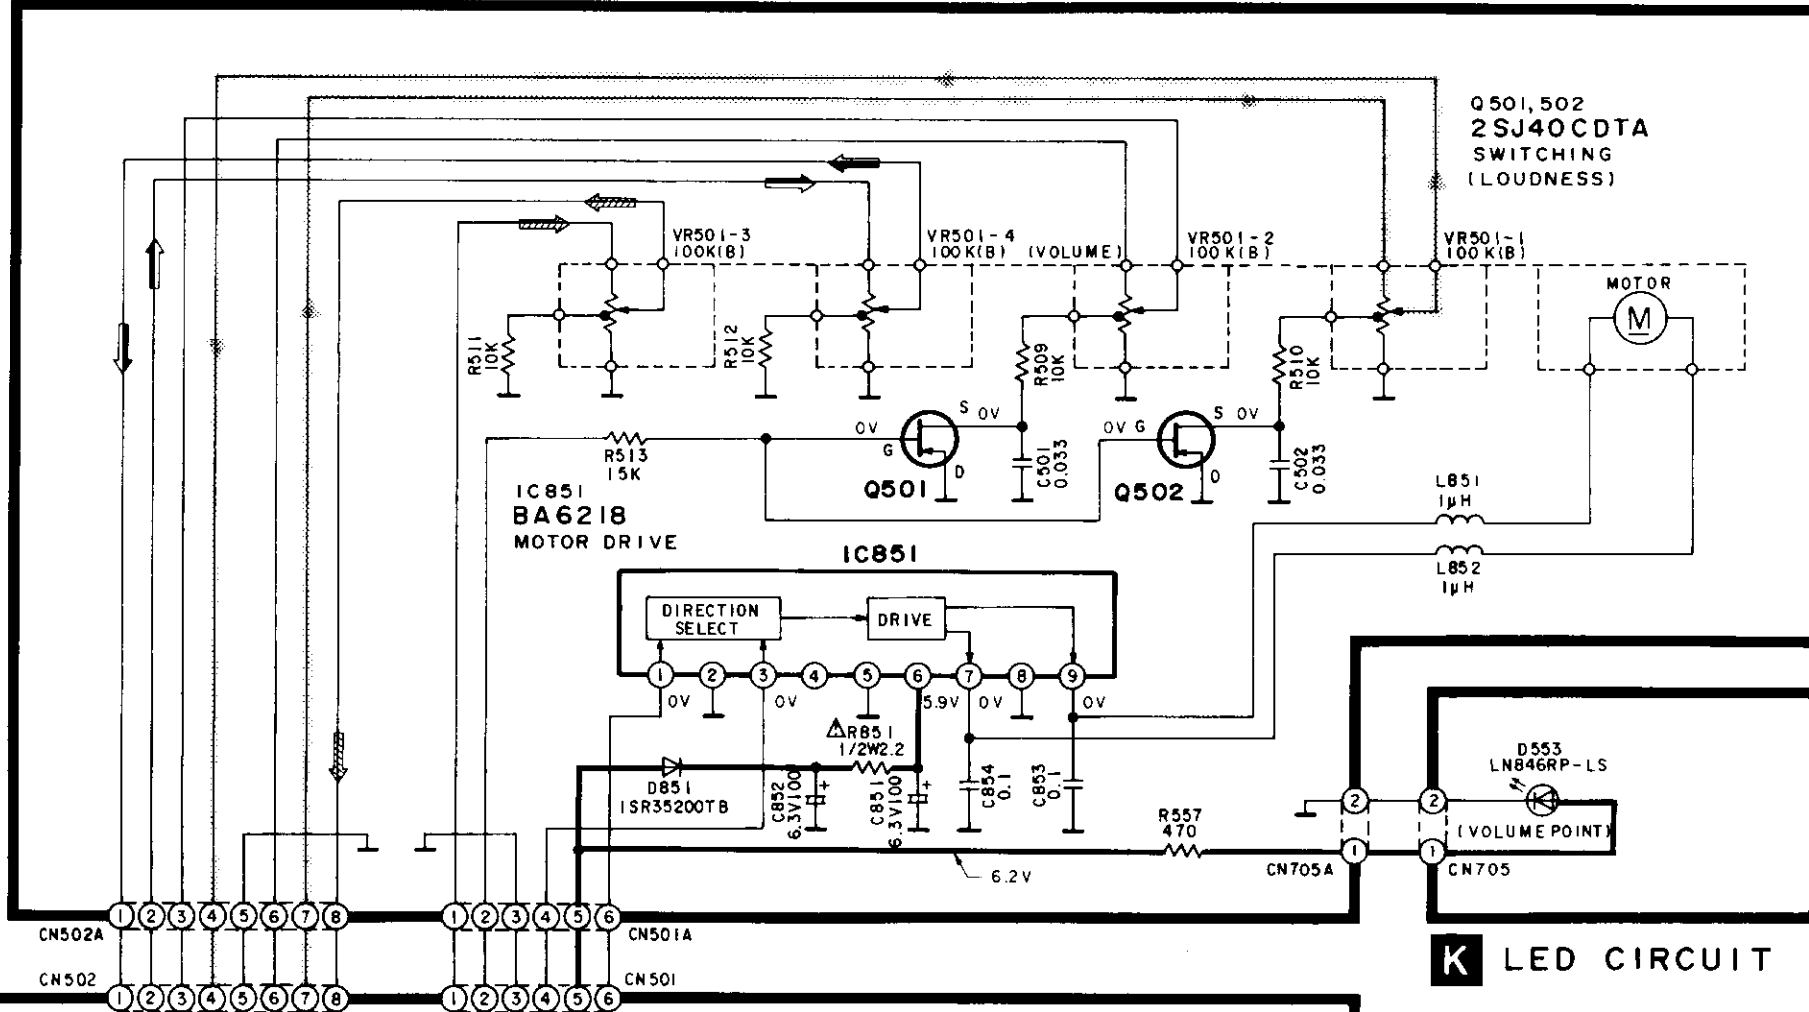


Q501, 502
2SJ40CDTA
SWITCHING
(LOUDNESS)



K LED CIRCUIT

Spectrum analyzer signal

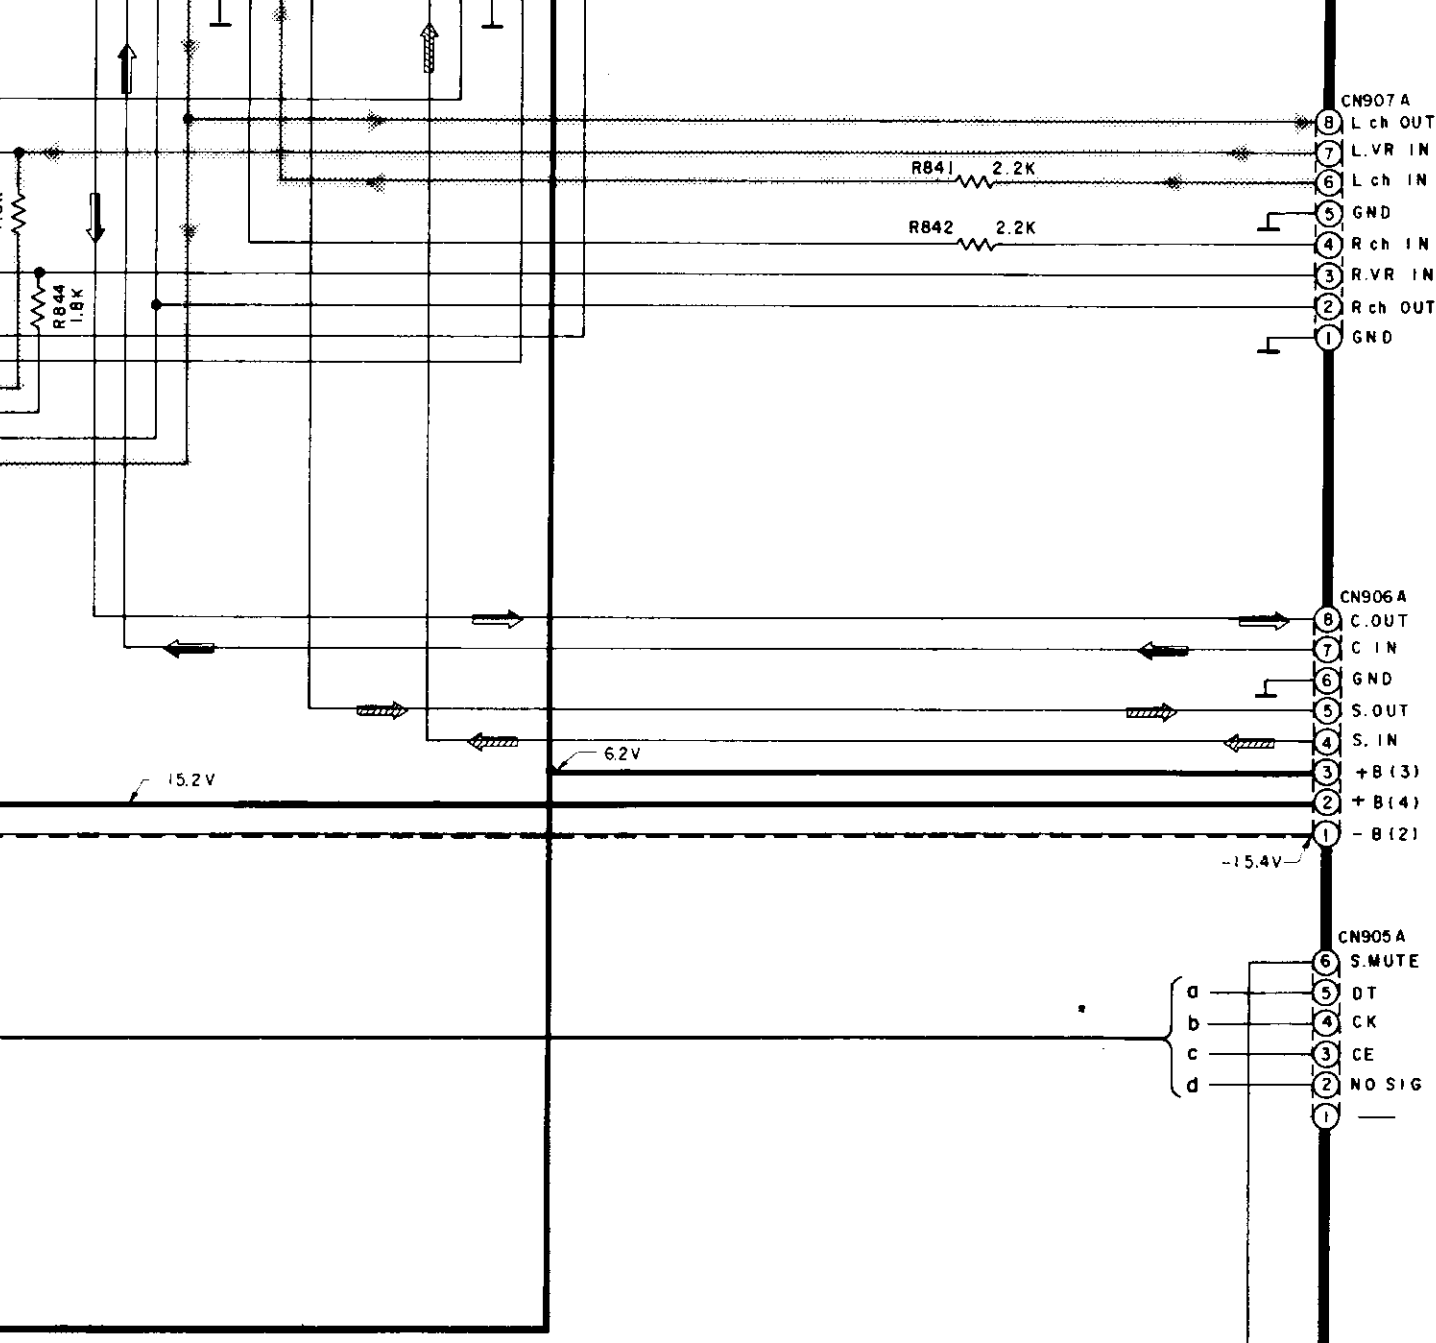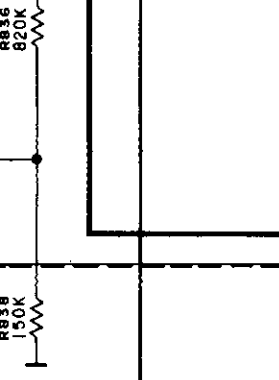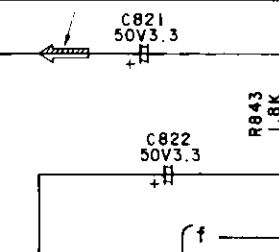

CN907 A
 8 L ch OUT
 7 L.VR IN
 6 L ch IN
 5 GND
 4 R ch IN
 3 R.VR IN
 2 R ch OUT
 1 GND
 To MAIN CIRCUIT (CN907) on page 32.

CN906 A
 8 C. OUT
 7 C IN
 6 GND
 5 S. OUT
 4 S. IN
 3 +B (3)
 2 +B (4)
 1 -B (2)
 To MAIN CIRCUIT (CN906) on page 32.

CN905 A
 6 S.MUTE
 5 DT
 4 CK
 3 CE
 2 NO SIG
 1
 To MAIN CIRCUIT (CN905) on page 32.

L MAIN CIRCUIT

A


B

C

D


E


F

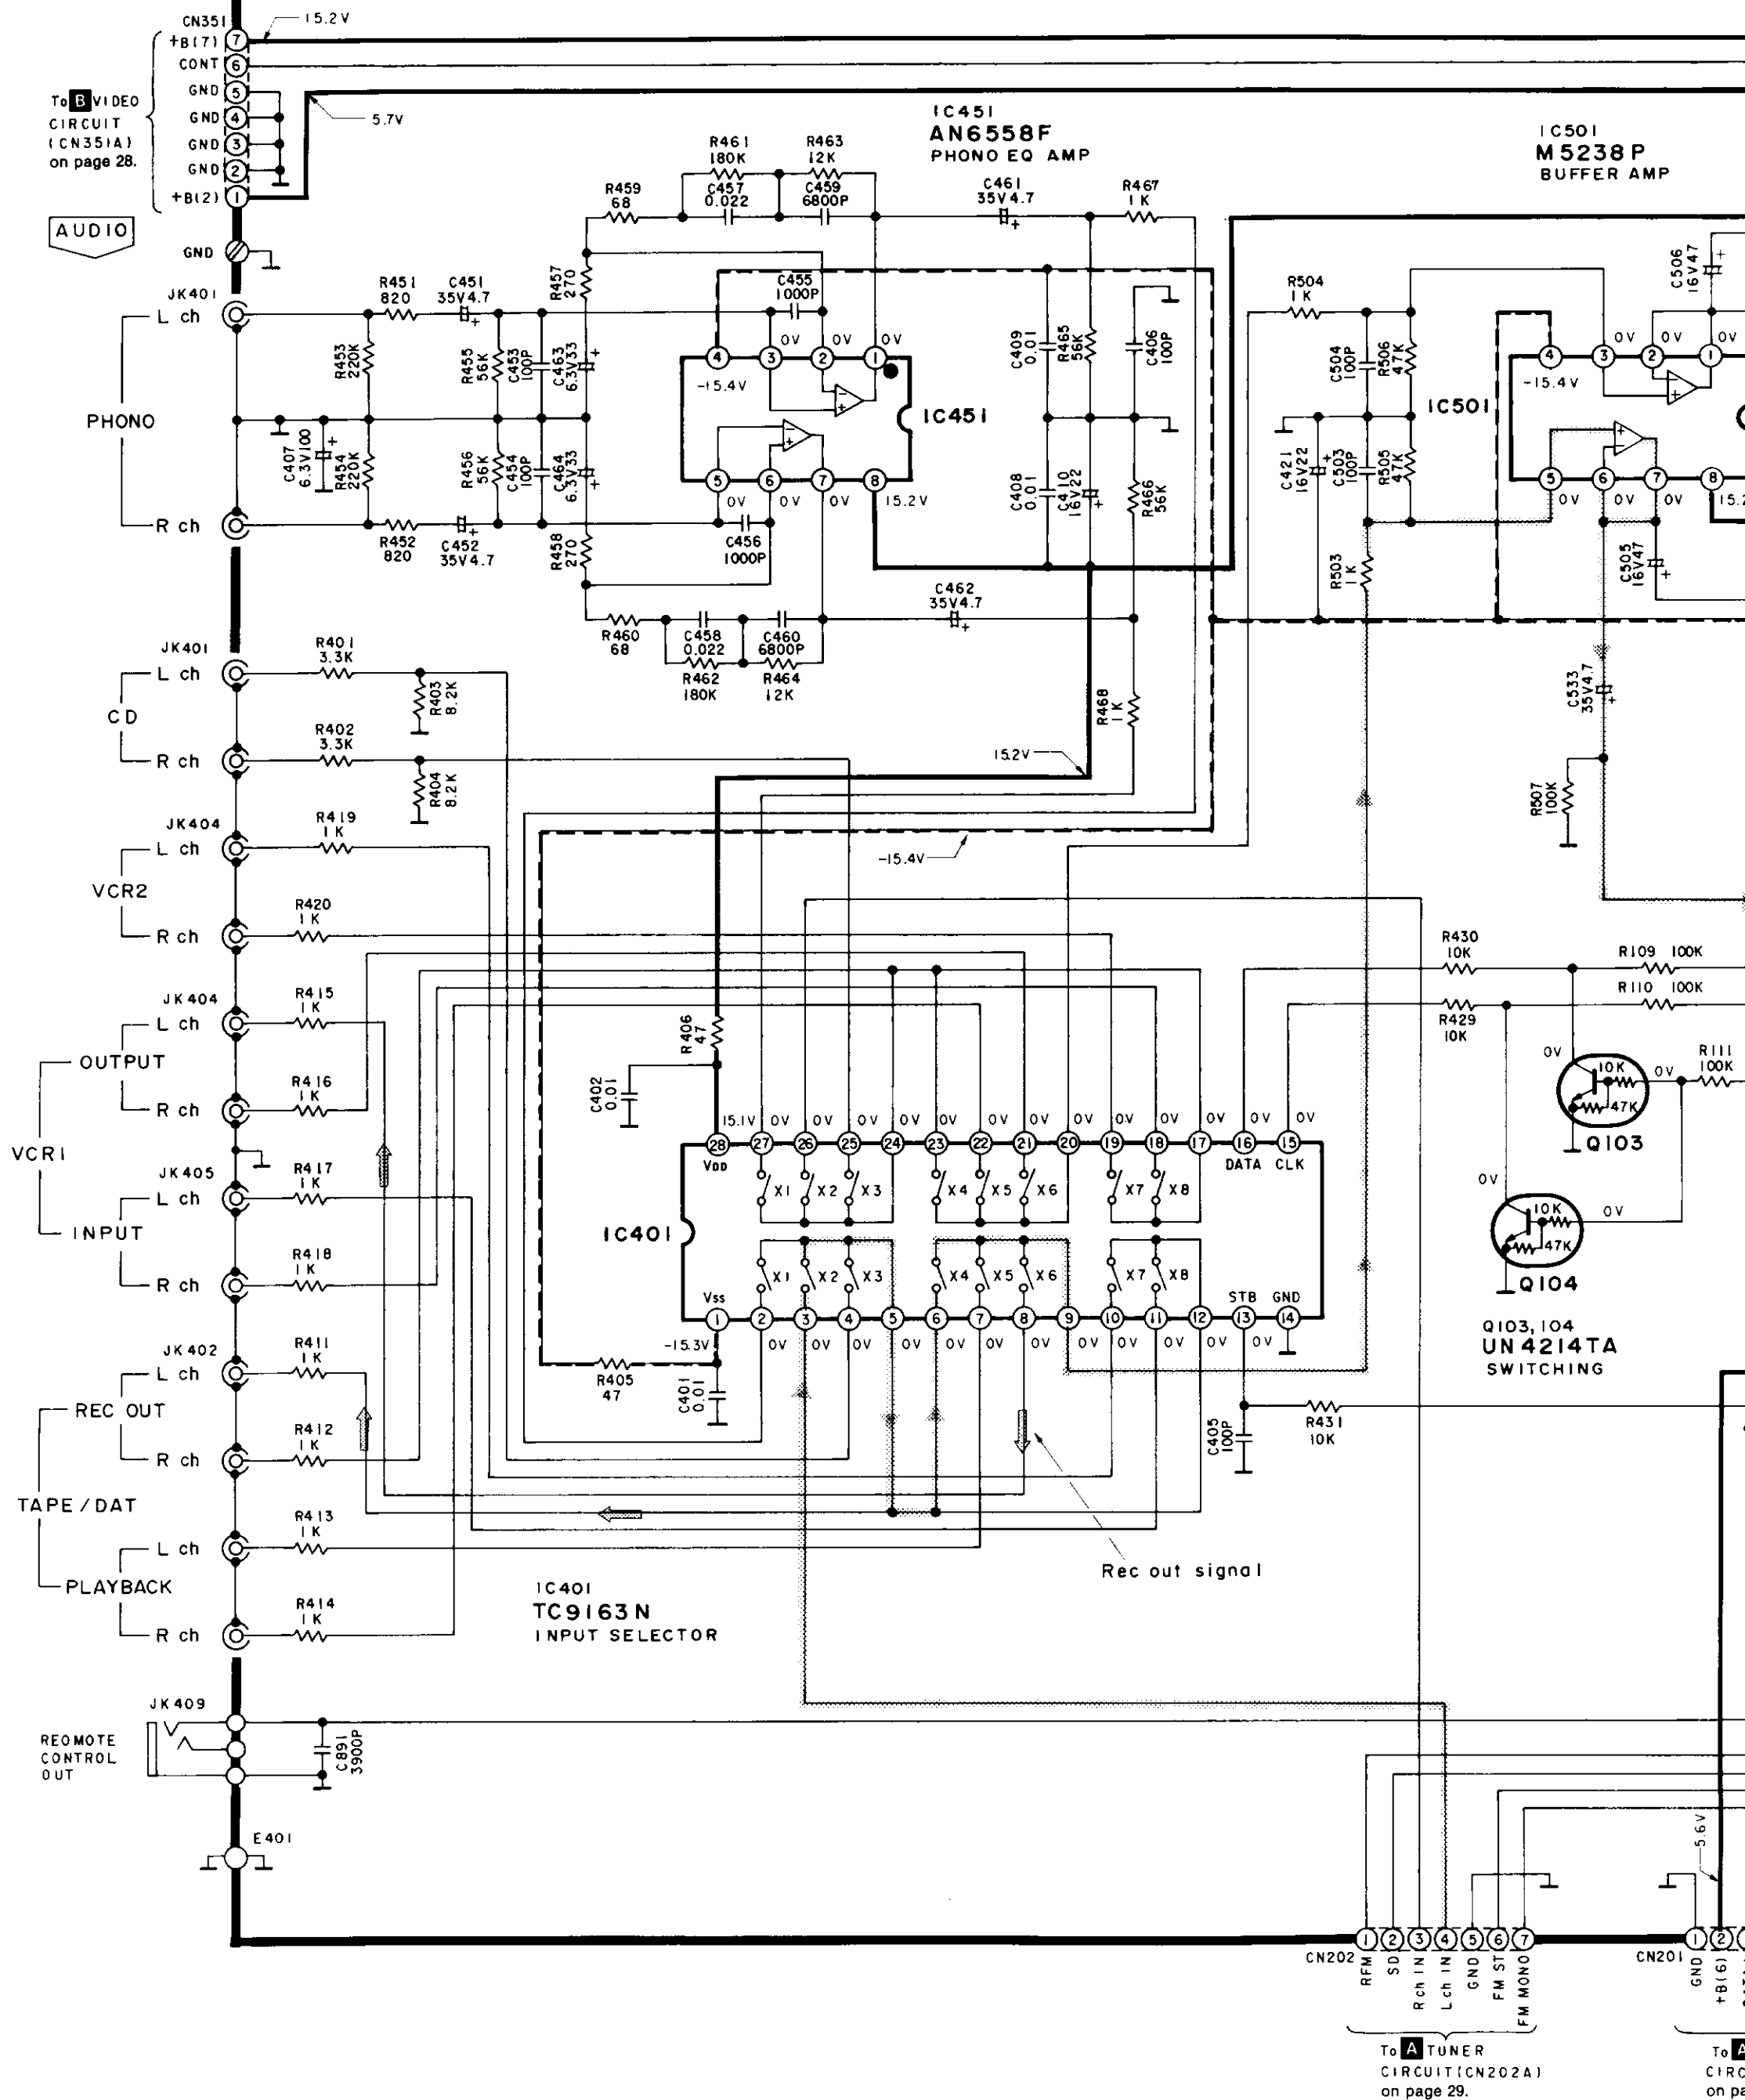

To **A** TUNER CIRCUIT (CN202A) on page 29.

To **A** CIRCUIT on page 29.

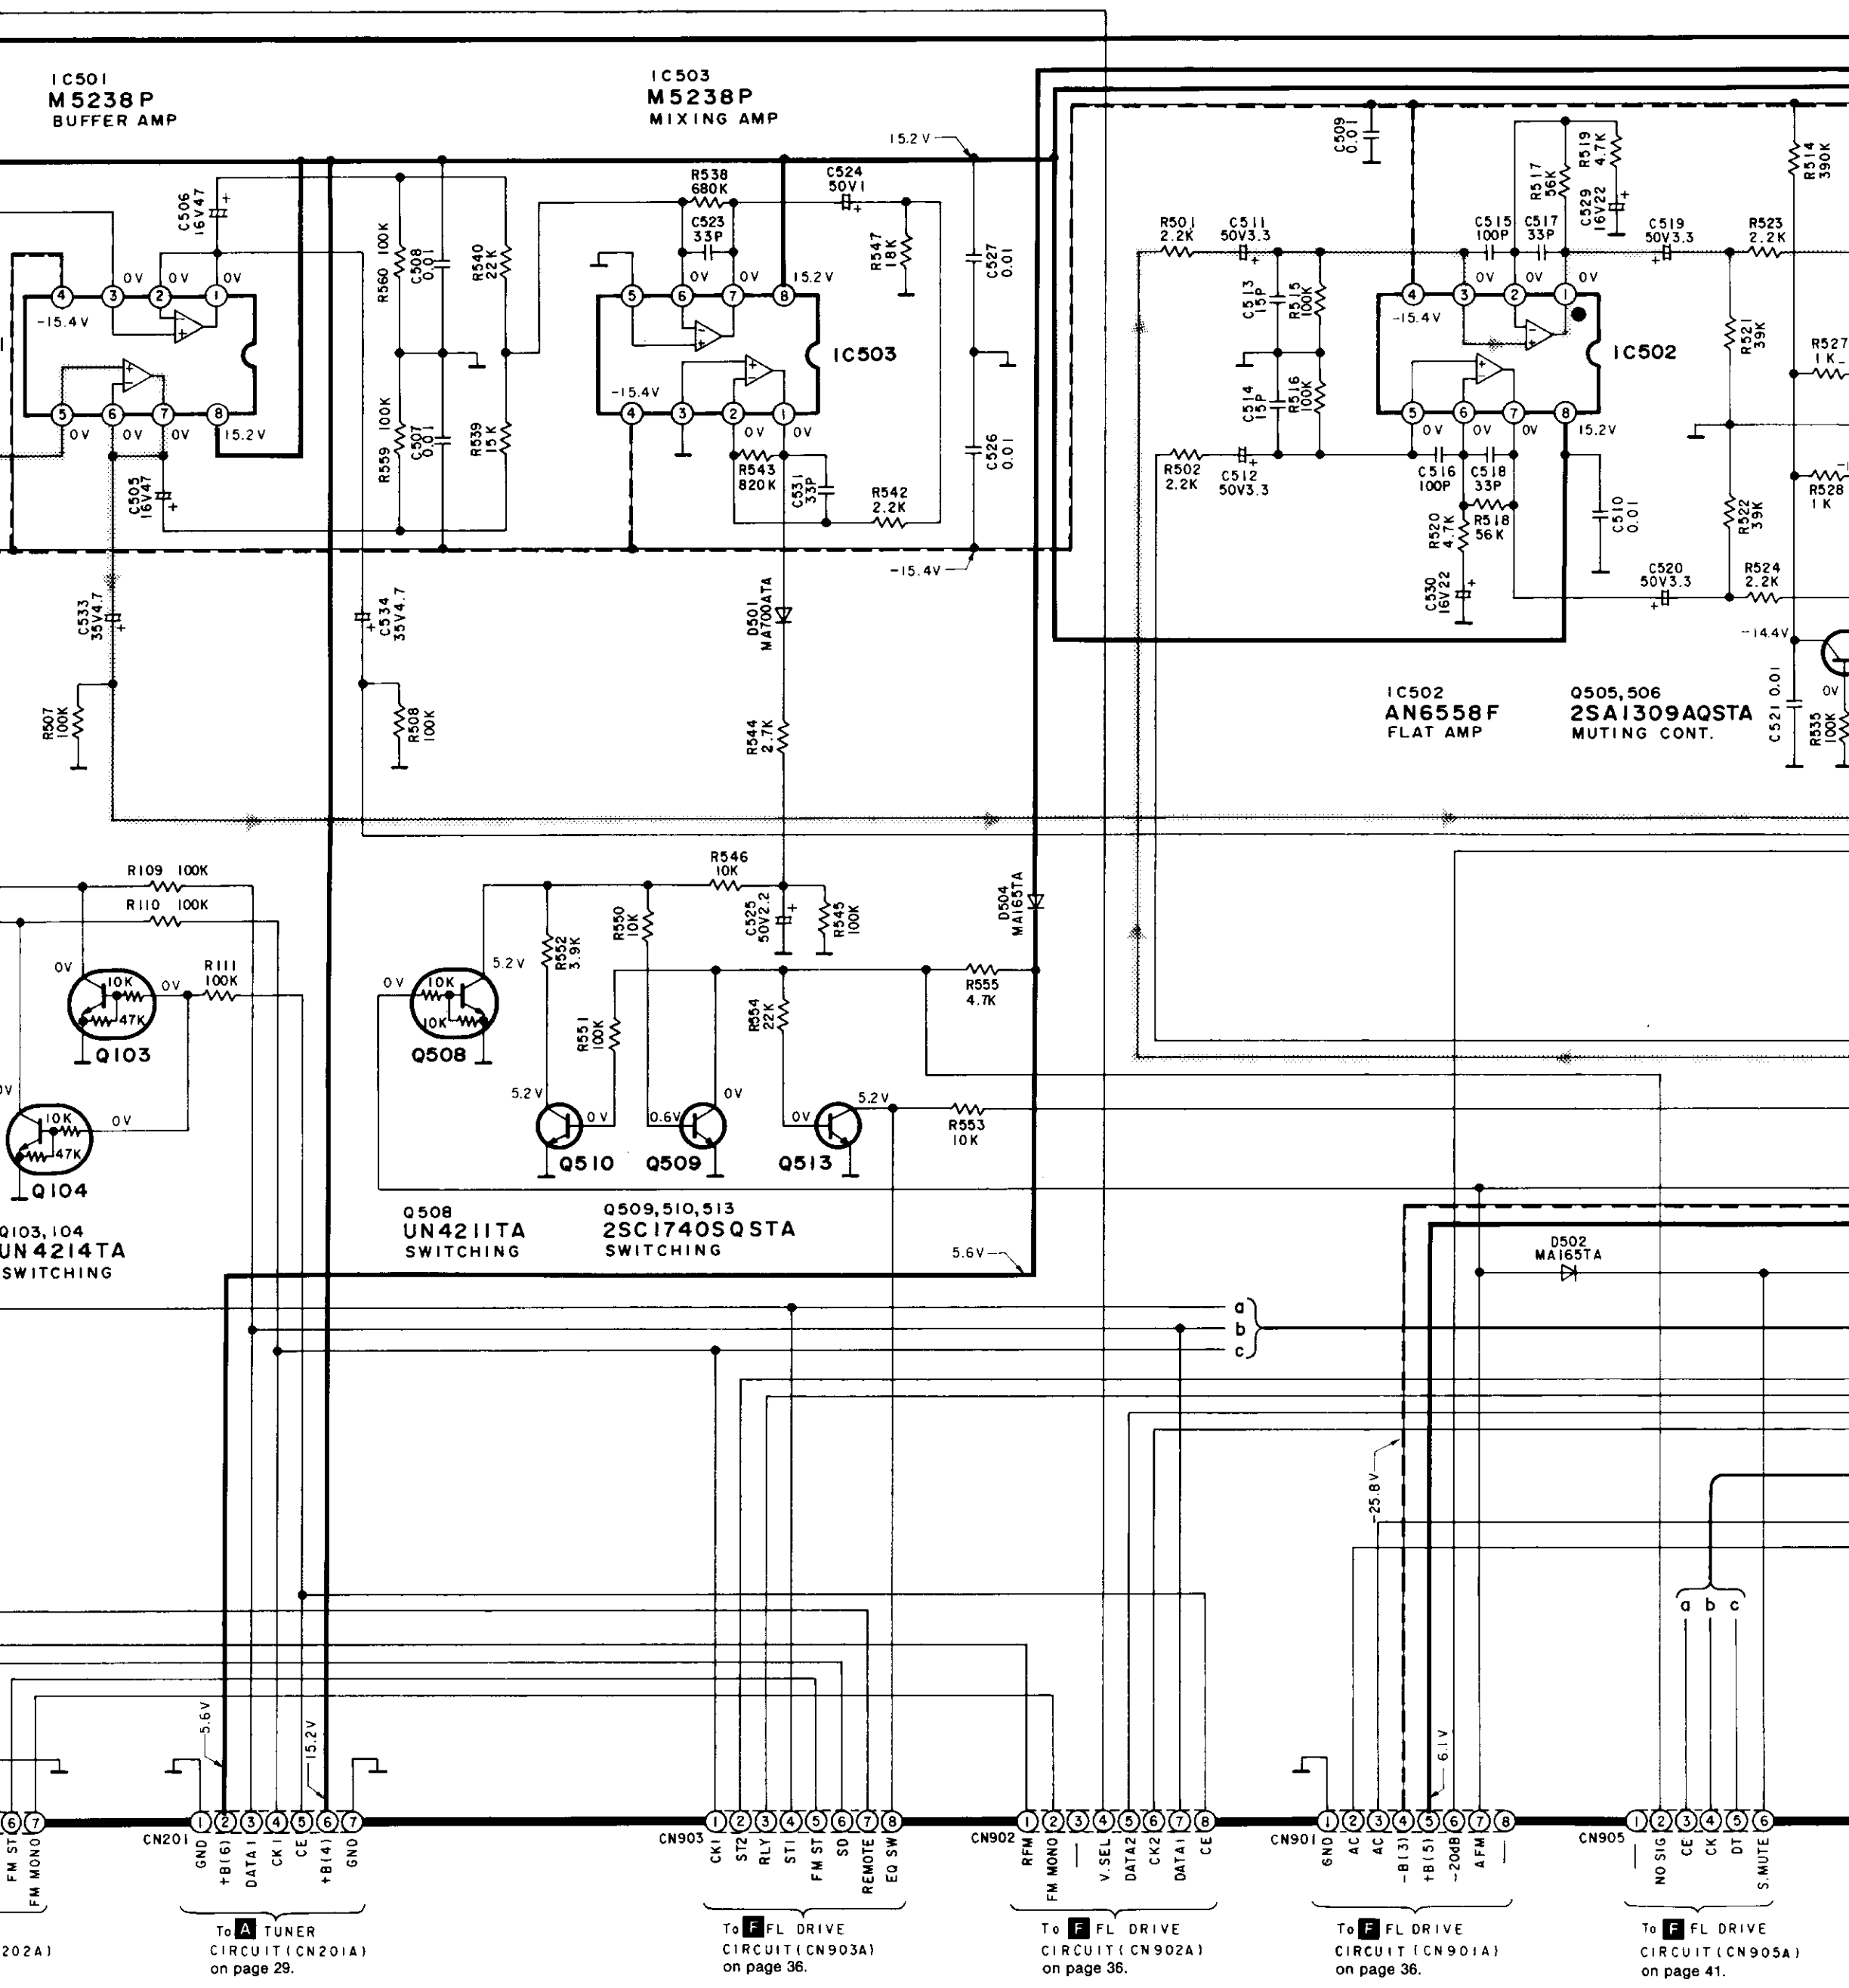


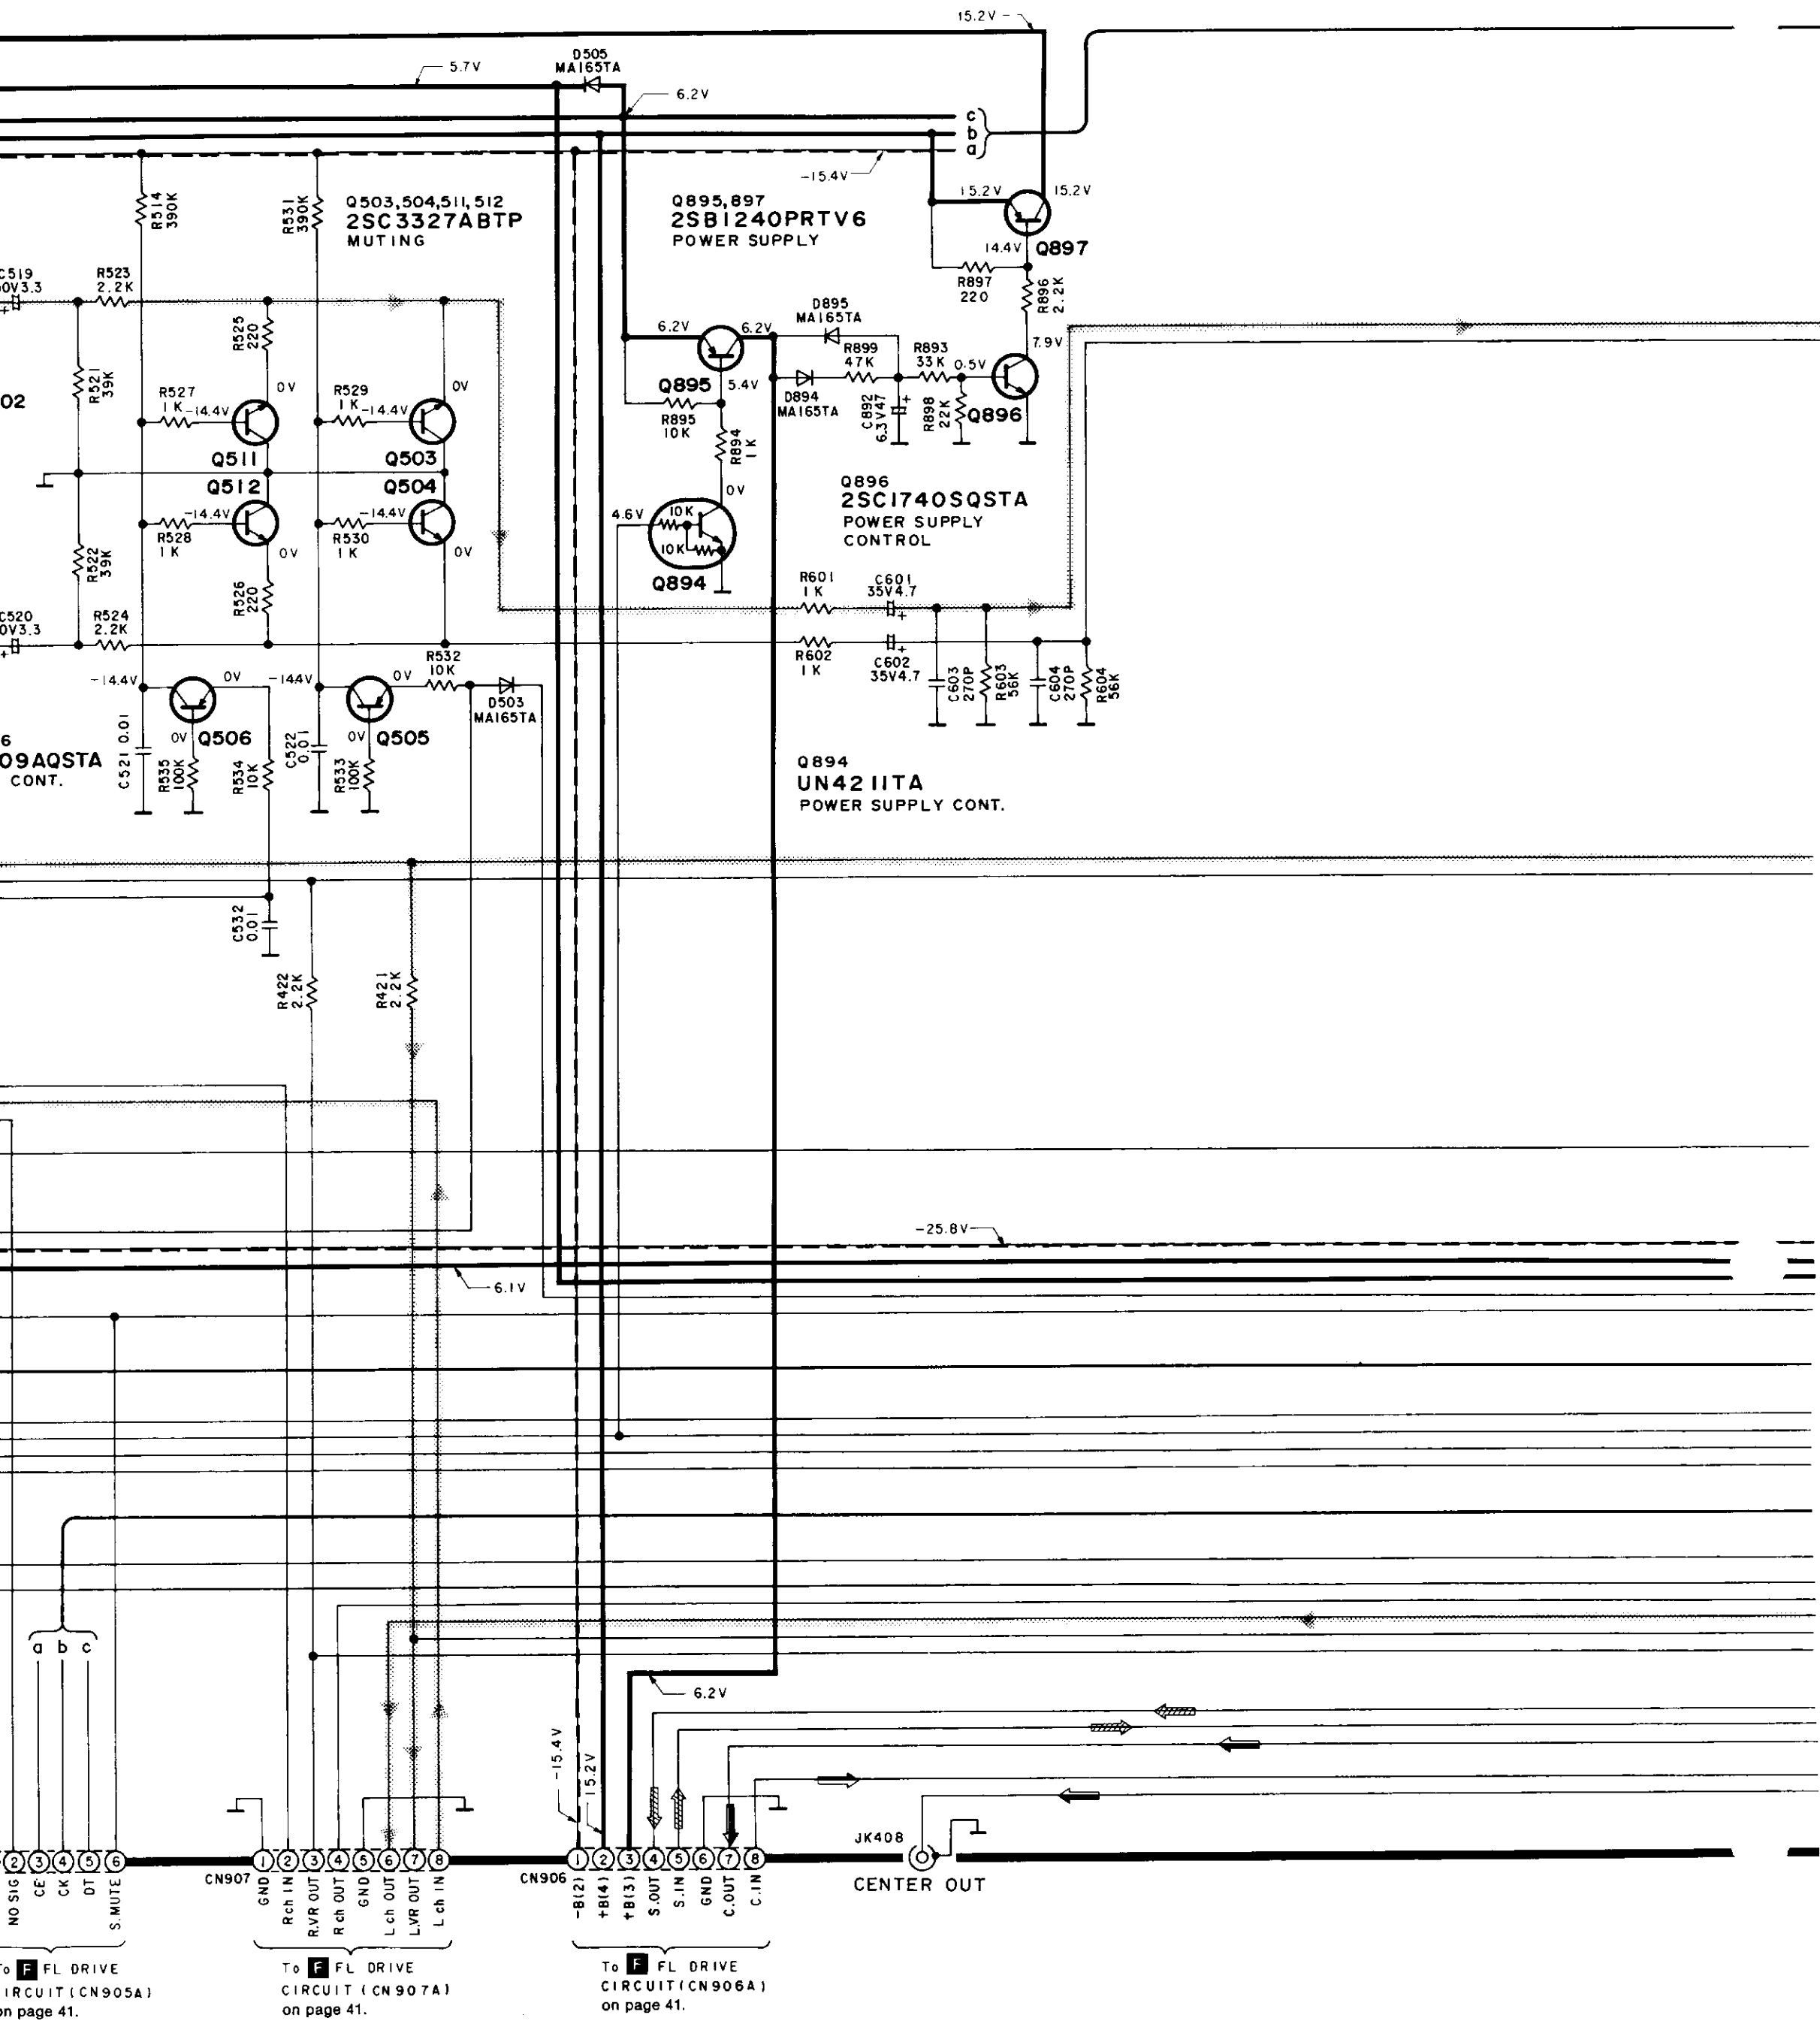

To **F** FL DRIVE
CIRCUIT (CN905A)
on page 41.


To **F** FL DRIVE
CIRCUIT (CN907A)
on page 41.

To **F** FL DRIVE
CIRCUIT (CN906A)
on page 41.

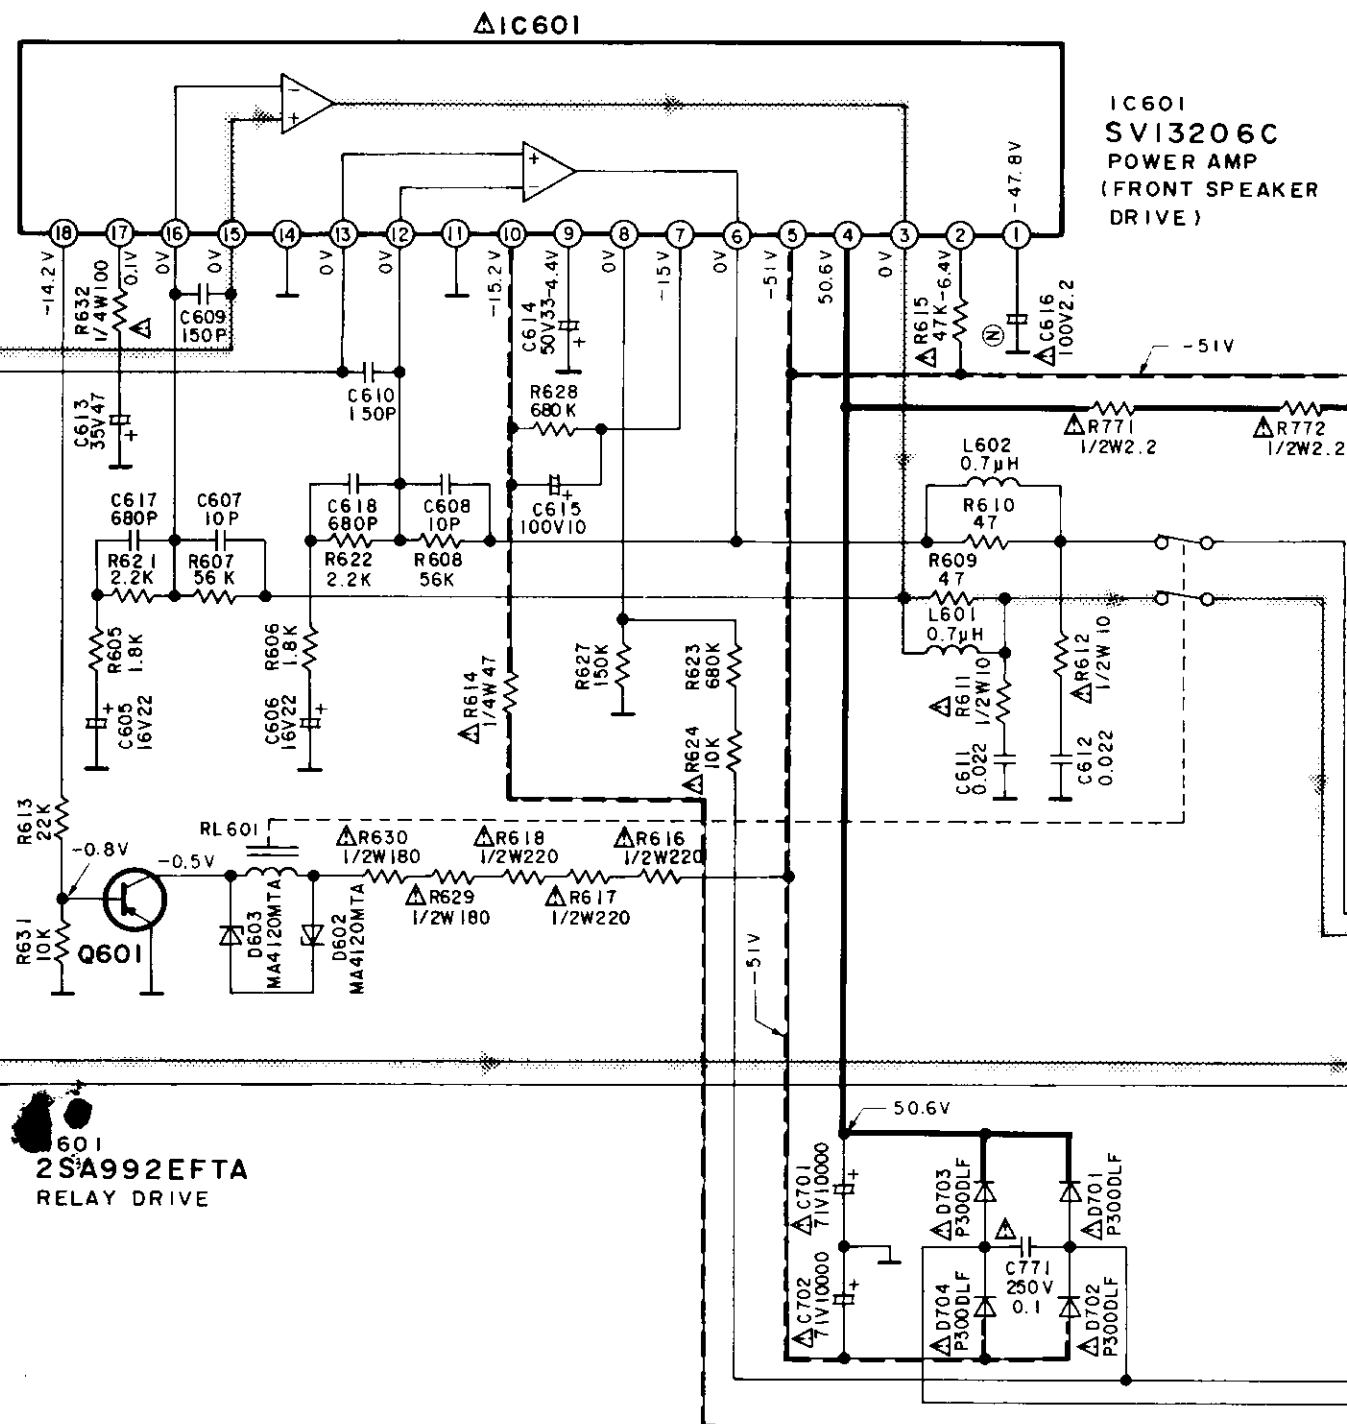

601
2SA992EFTA
RELAY DRIVE

-25.8V

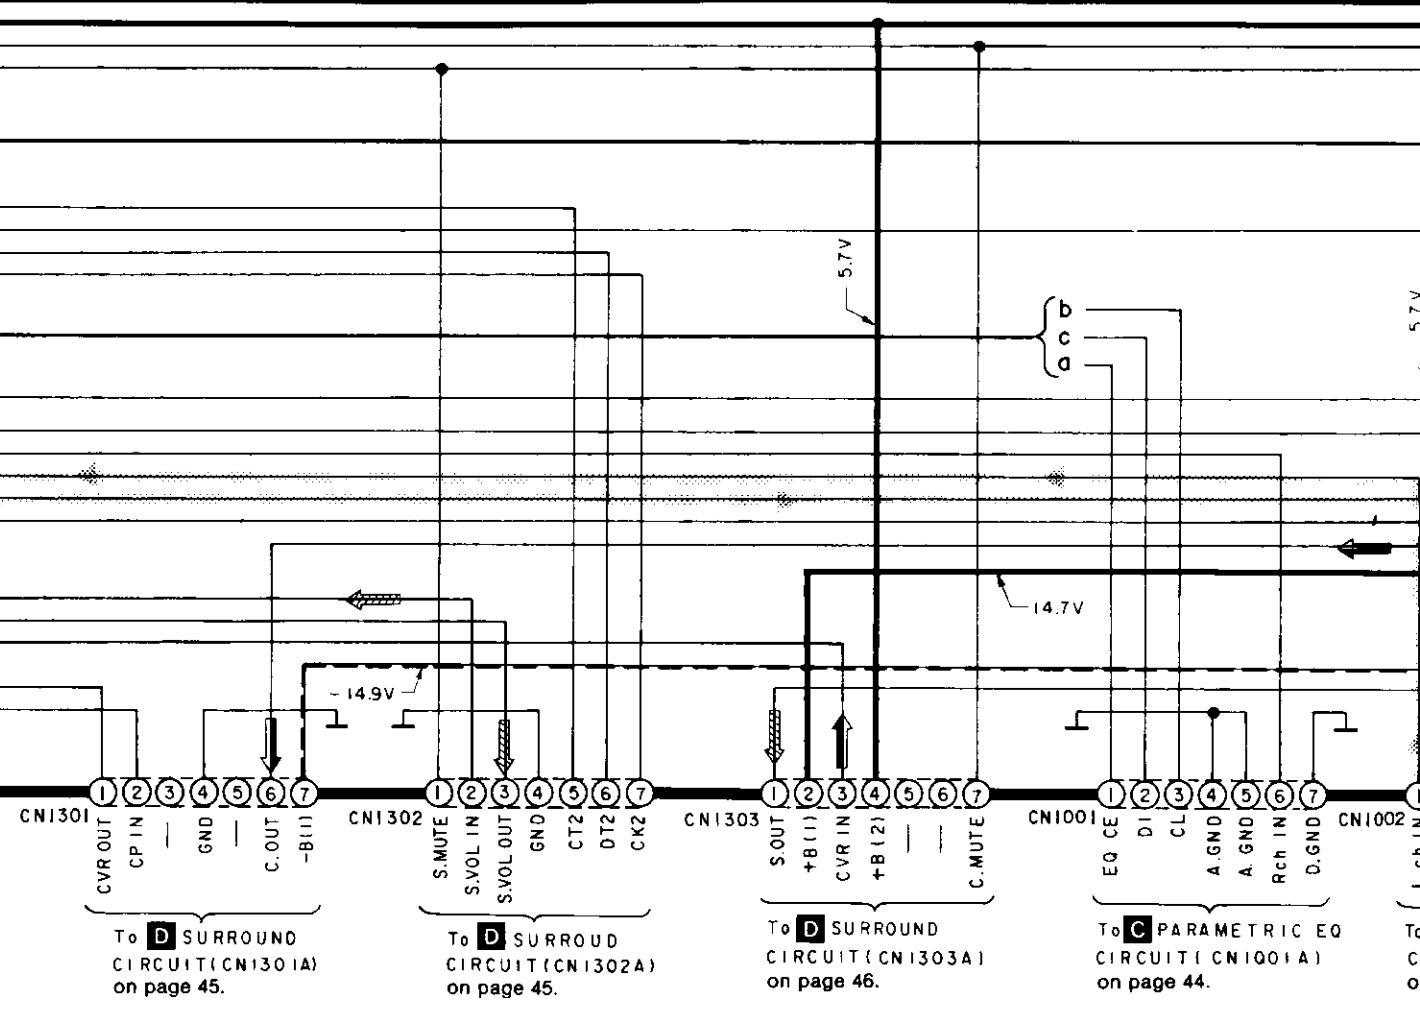


To **D** SURROUND
CIRCUIT (CN1301A)
on page 45.

To **D** SURROUND
CIRCUIT (CN1302A)
on page 45.

To **D** SURROUND
CIRCUIT (CN1303A)
on page 46.

To **C** PARAMETRIC EQ
CIRCUIT (CN1001A)
on page 44.

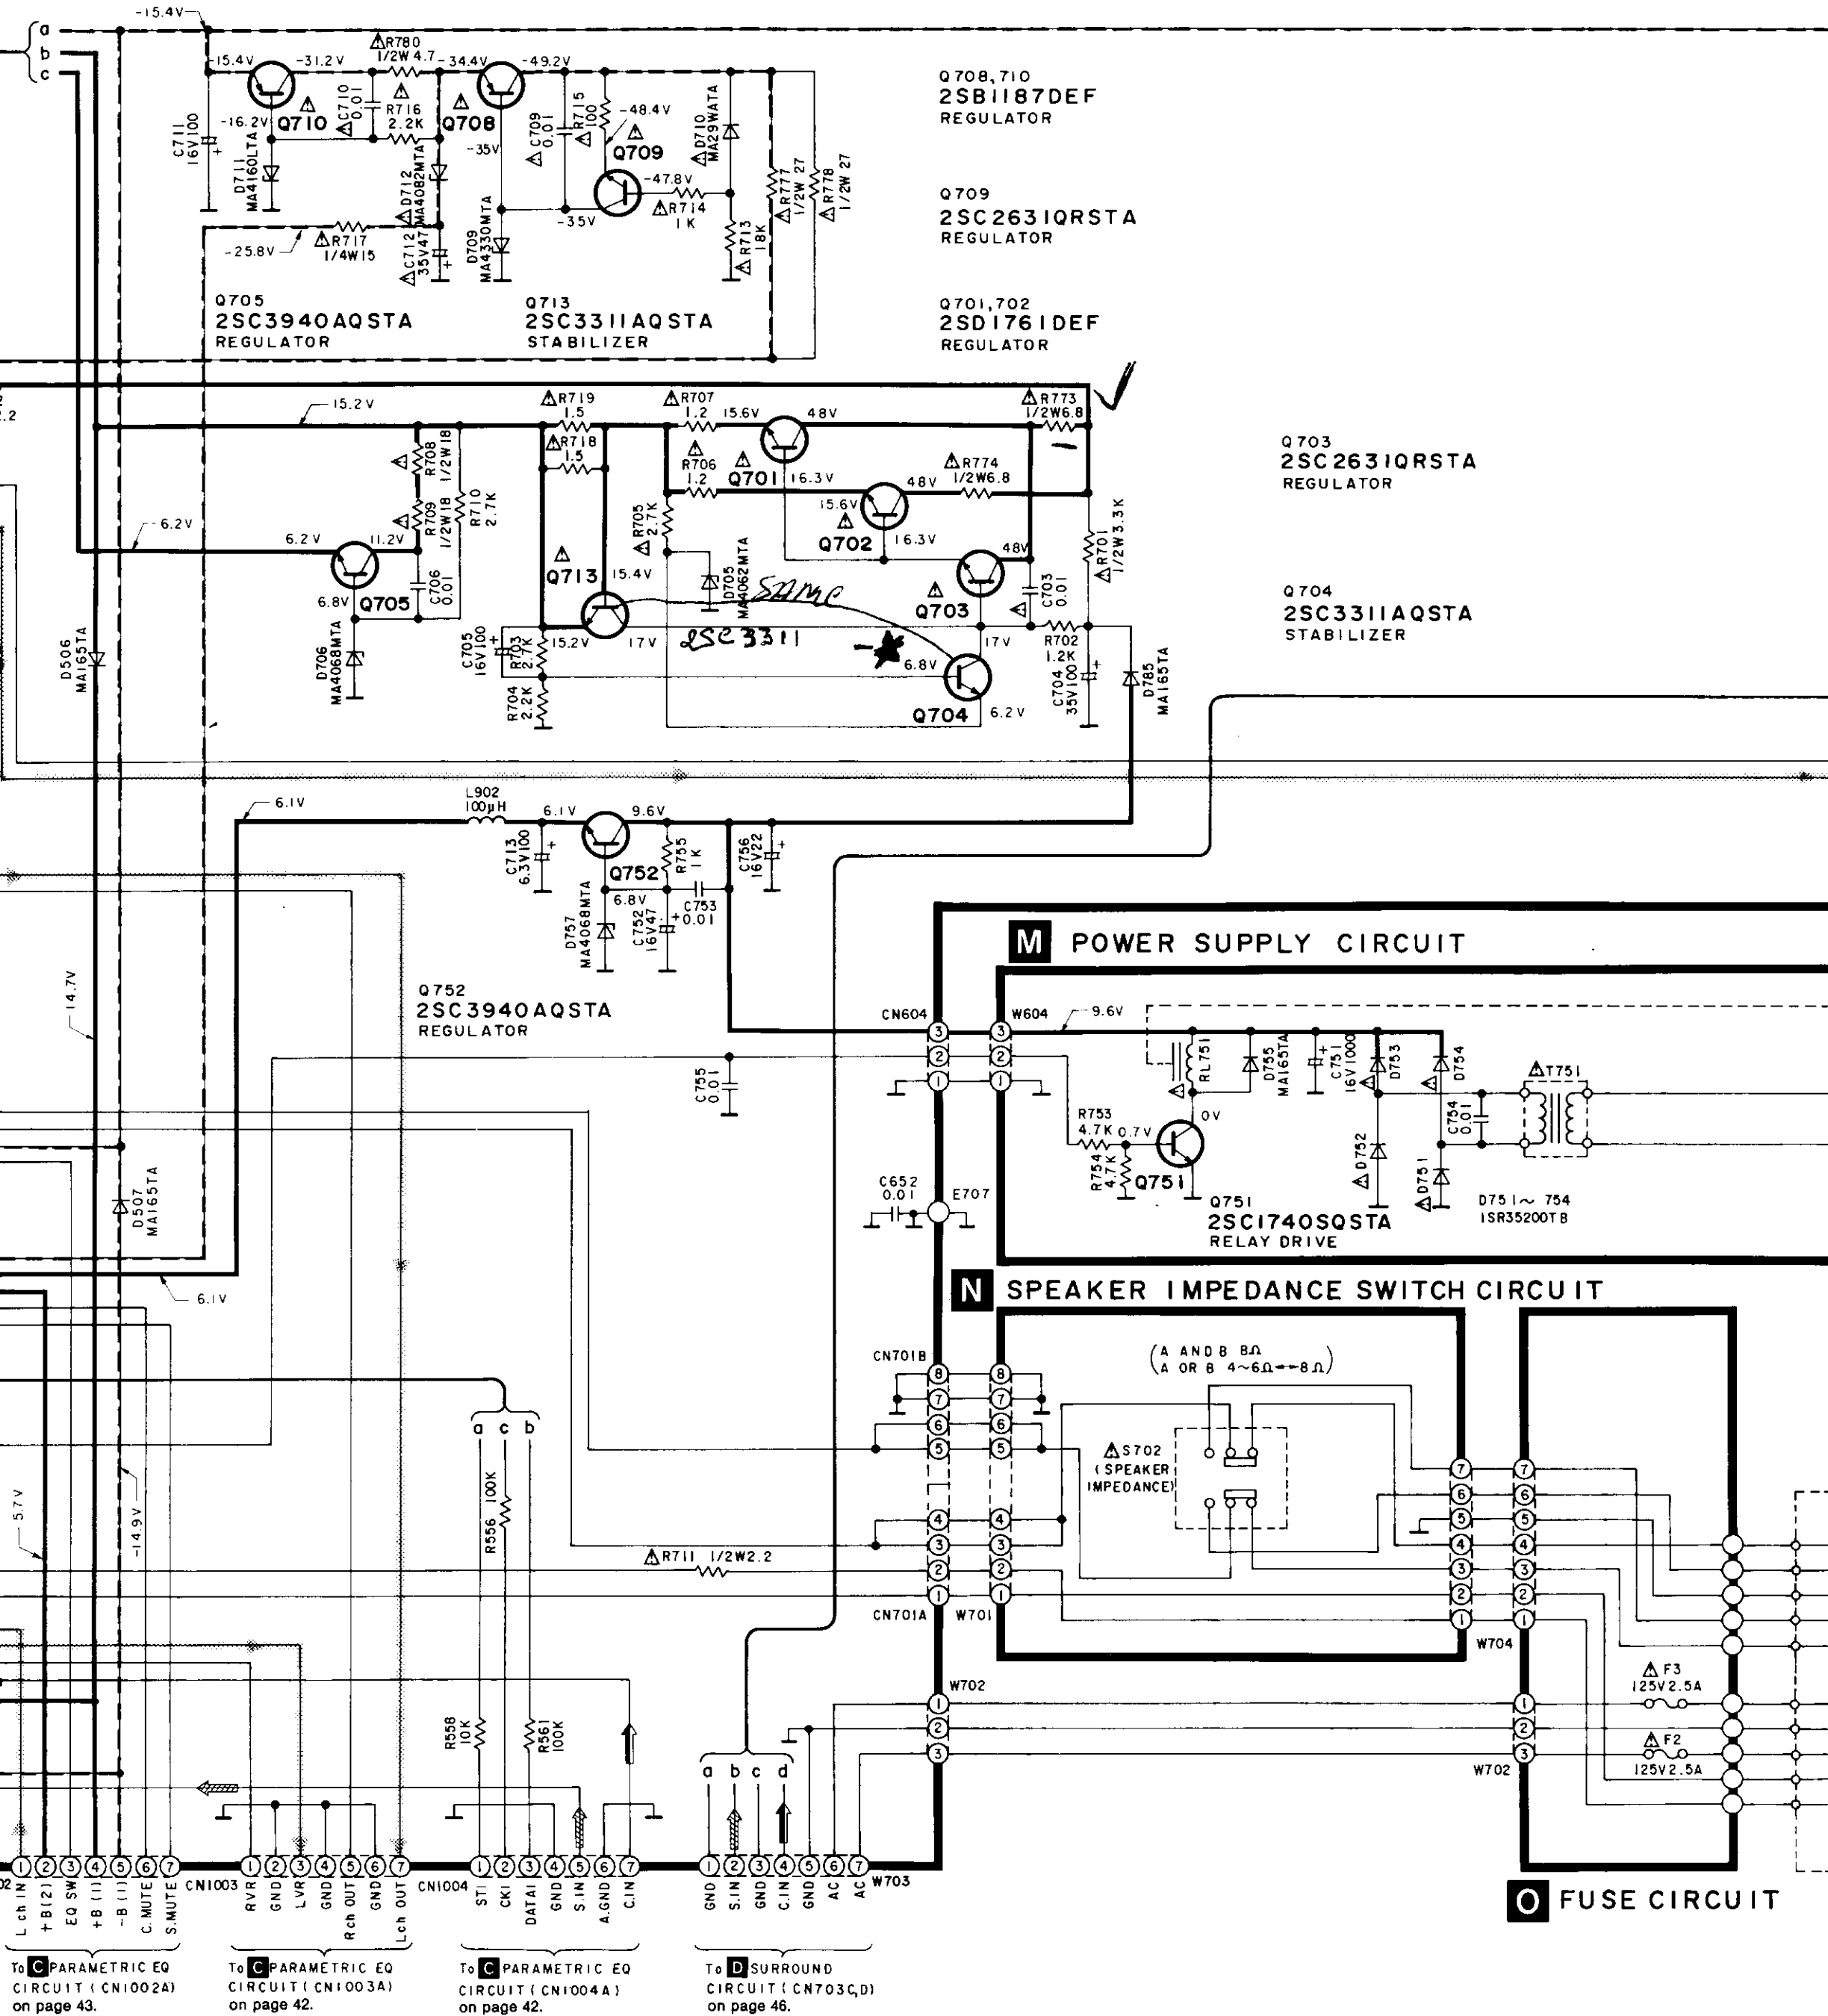


To **C** PARAMETRIC EQ CIRCUIT (CN1002A) on page 43.

To **C** PARAMETRIC EQ CIRCUIT (CN1003A) on page 42.

To **C** PARAMETRIC EQ CIRCUIT (CN1004A) on page 42.


To **D** SURROUND CIRCUIT (CN703C,D) on page 46.

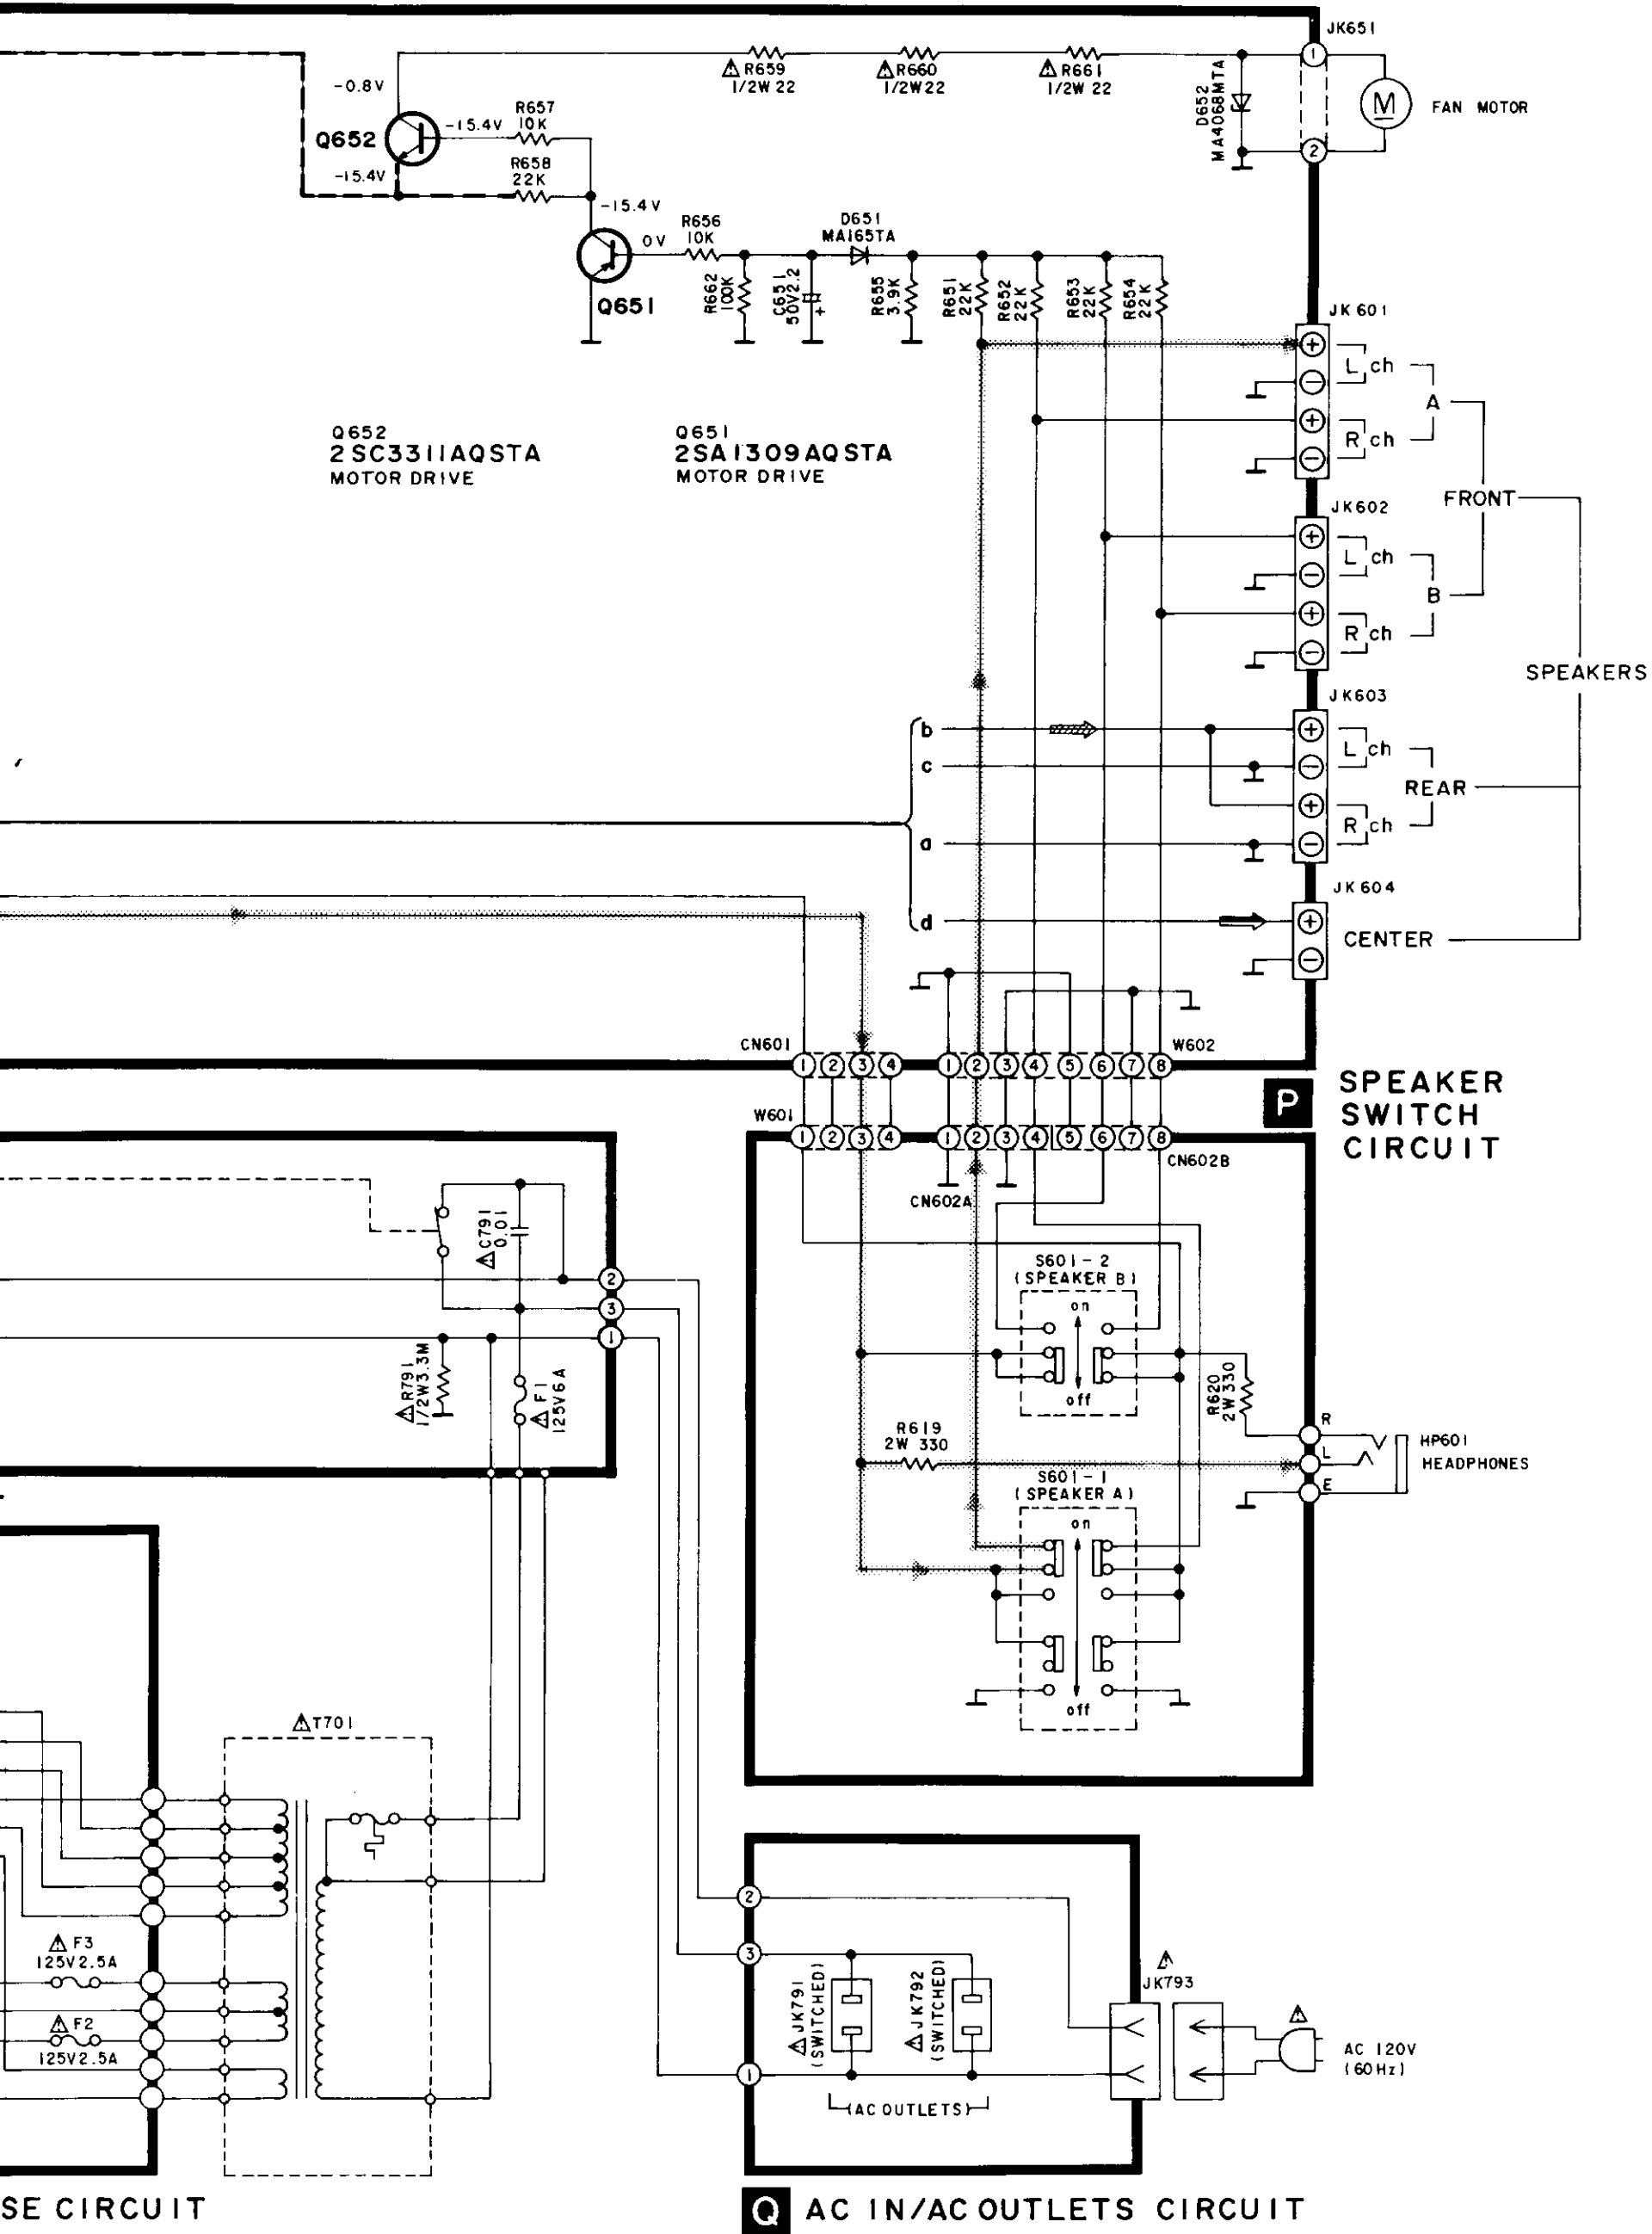


To MAIN CIRCUIT on page 33.

D SURROUND CIRCUIT

To MAIN CIRCUIT (CN 1302) on page 33.

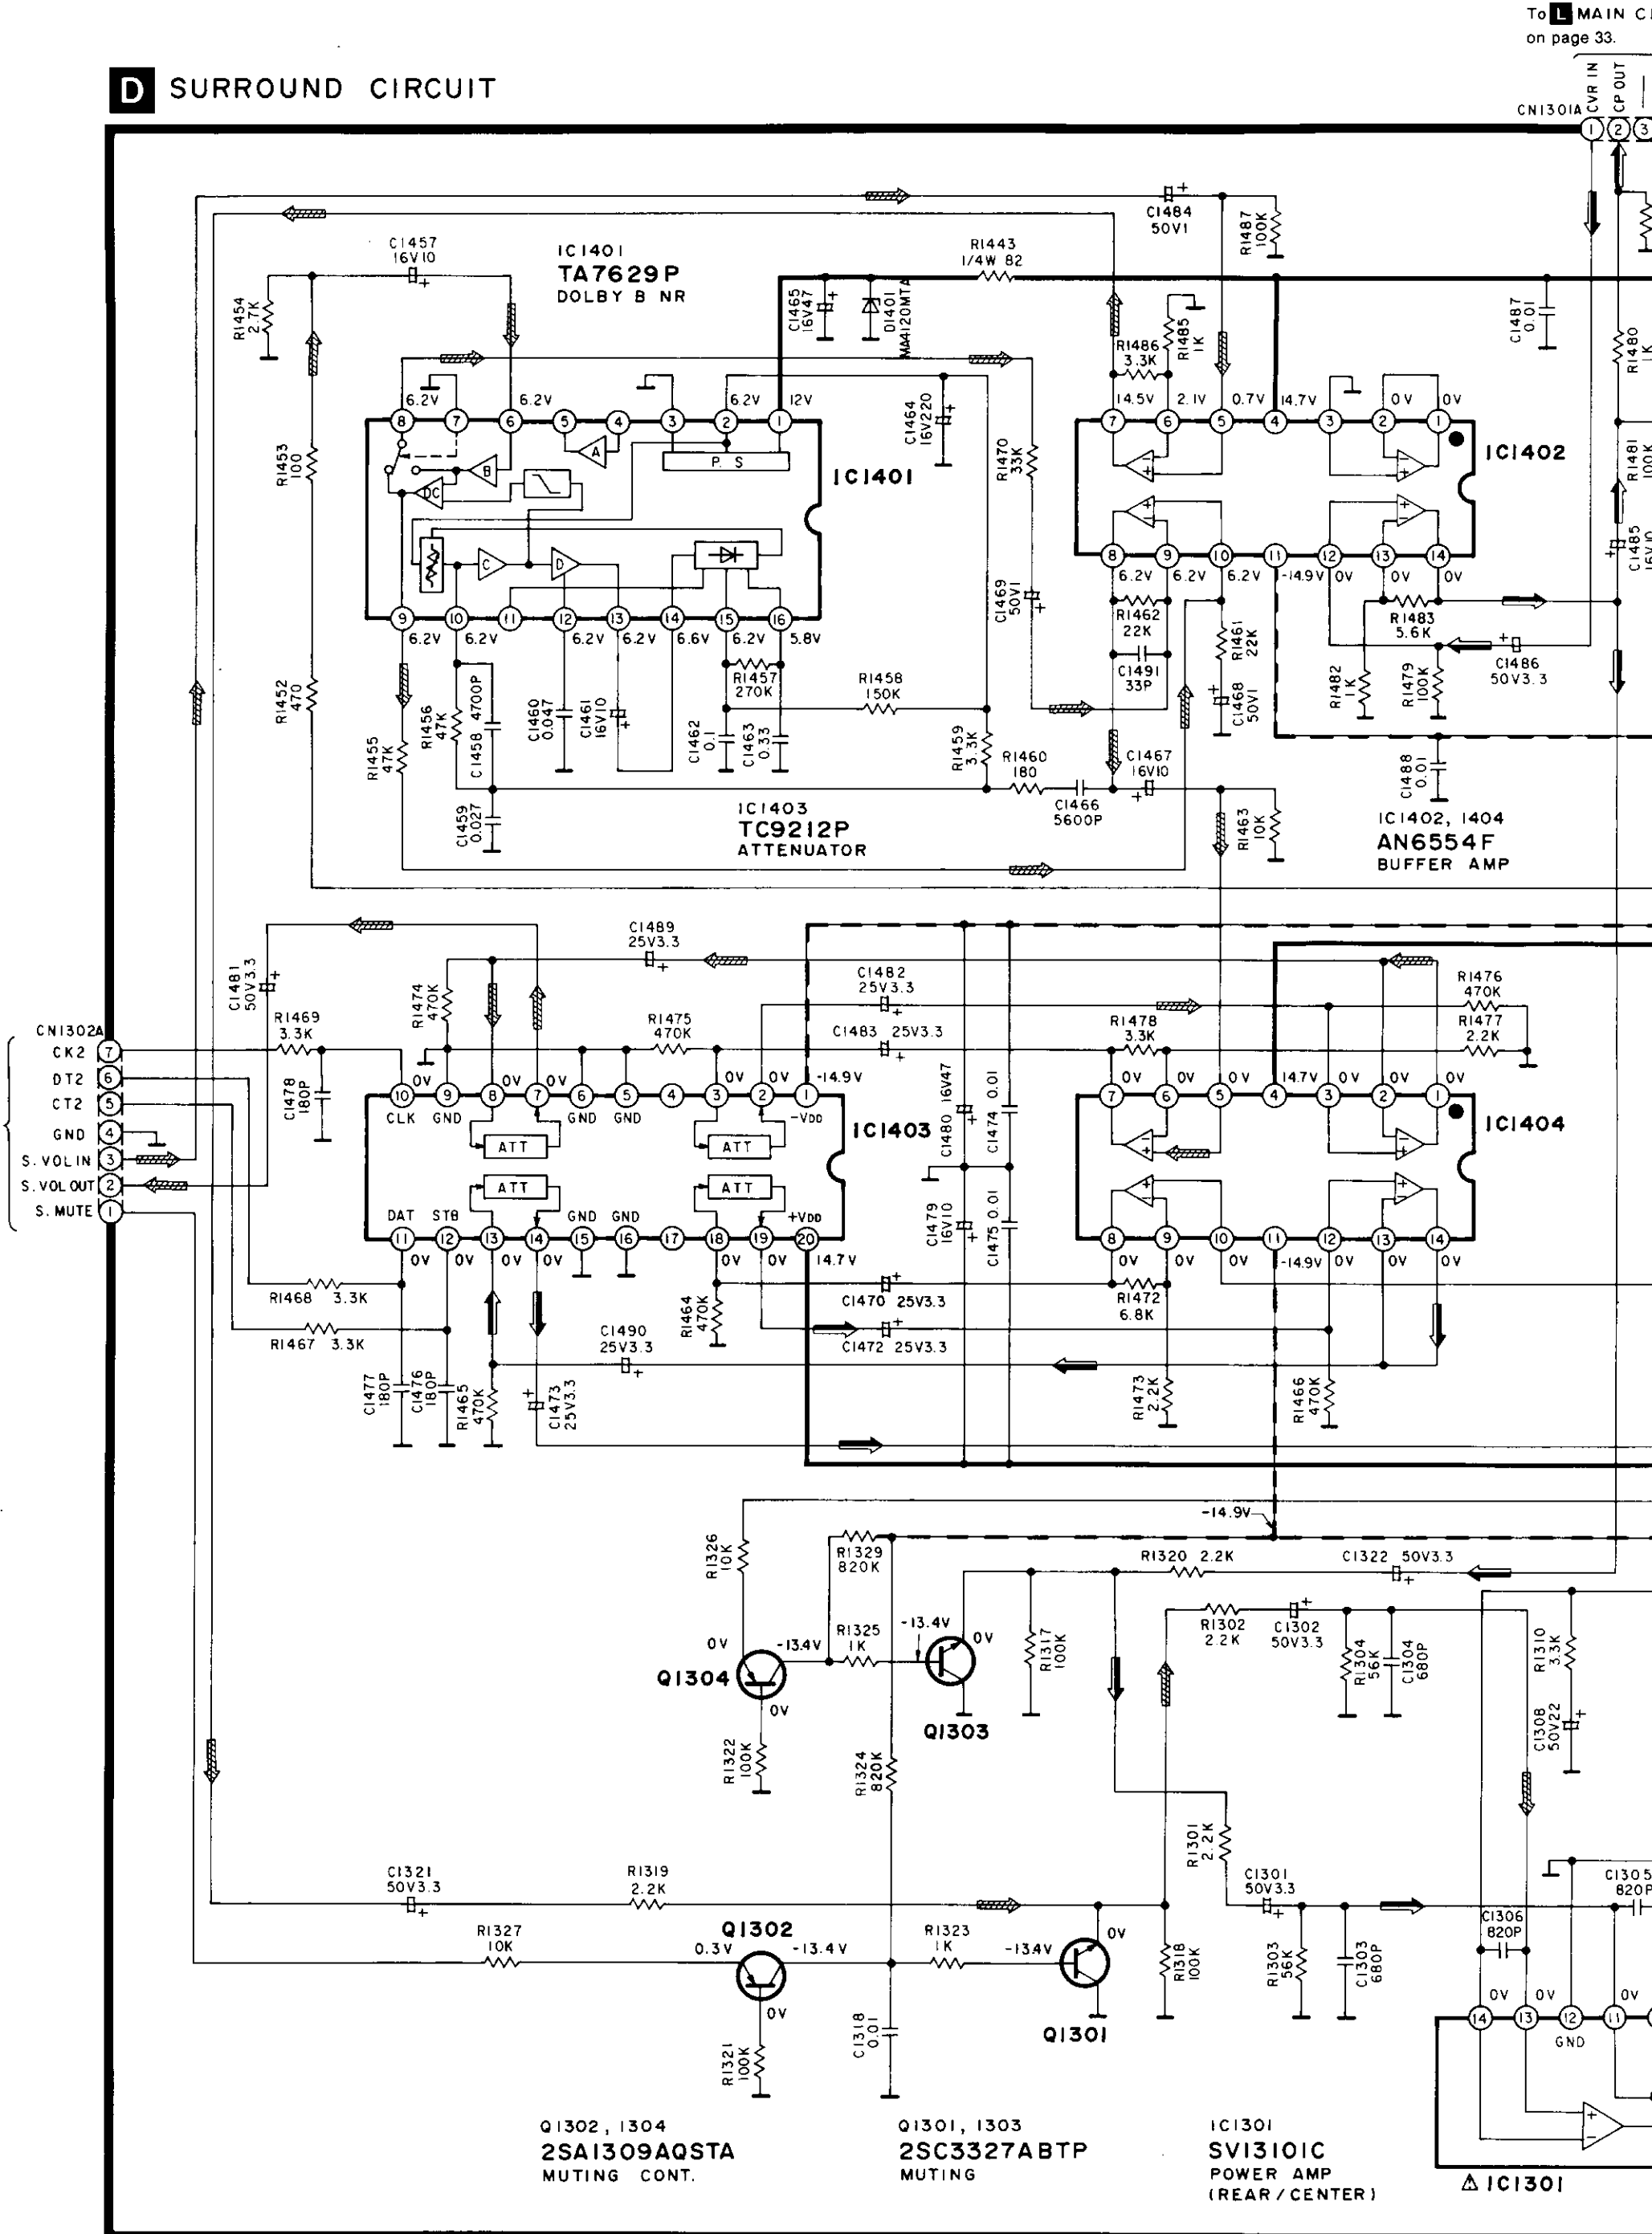

To MAIN CIRCUIT(CN1301) on page 33. To MAIN CIRCUIT(CN1303) on page 33.

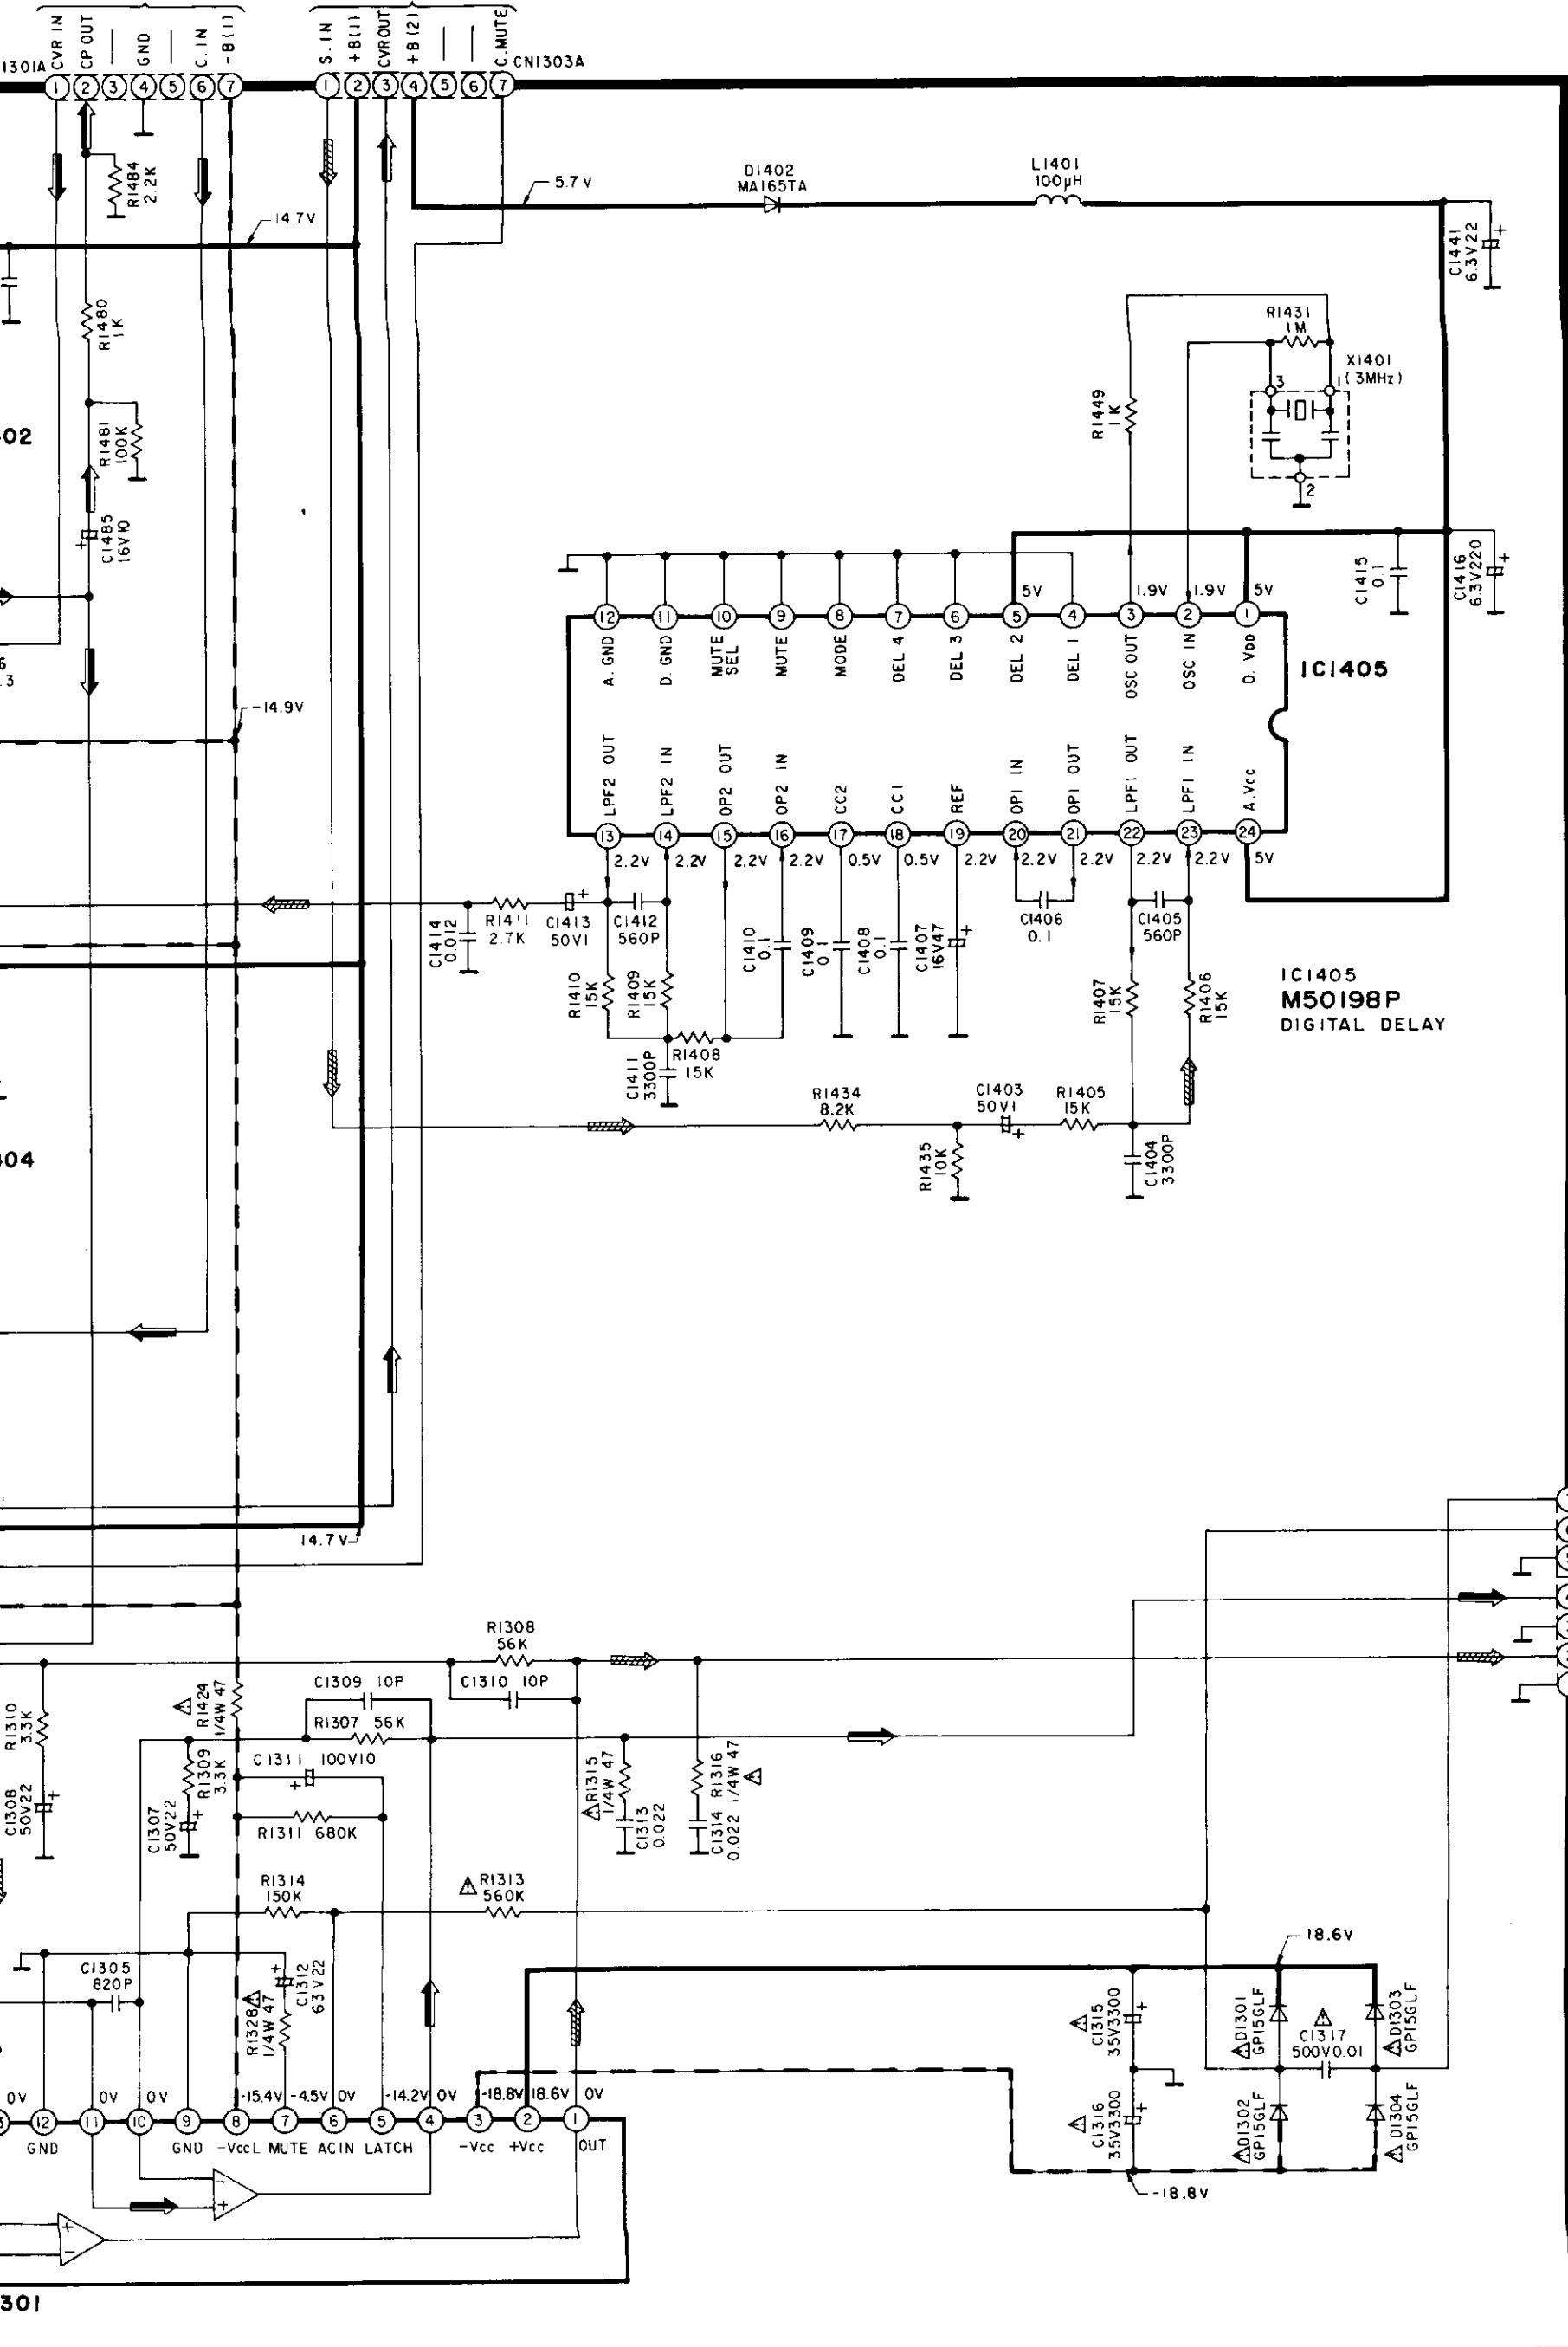

CN7030
 7 AC
 6 AC
 5 GND
 4 C. OUT
 3 GND
 2 S. OUT
 1 GND
 CN703C

To MAIN CIRCUIT (W703) on page 34.

SCHEMATIC DIAGRAM

(Parts list on pages 59~66.)

Note 1:

- S601 : Speaker selectors (SPEAKERS) switches.
[S601-1: A, S601-2: B]
- S702 : Speaker impedance selector
- S801 : Display mode select (-DISPLAY MODE, -DEMO) switch.
- S802~805: Parametric EQ band switches.
[S802: EQ1, S803: EQ2, S804: EQ3]
[S805: EQ4]
- S806 : Parametric EQ system ON/OFF (P. EQ SYS) switch.
- S807 : Fine mode (FINE) switch.
- S808 : Slope changeover [SLOPE (Q)] switch.
- S809 : Parametric EQ/tone mode select (P. EQ/TONE) switch.
- S810 : Parametric EQ system memory (MEMORY) switch.
- S811 : Fixed preset (FIXED PRESET) switch.
- S812~814: Equalization preset (MANUAL PRESET) switches.
[S812: 1, S813: 2, S814: 3]
- S901~910: Preset-tuning (1-0) (30 CHANNEL RANDOM PRESET TUNING) switches.
[S901: 1, S902: 2, S903: 3, S904: 4, S905: 5,
S906: 6, S907: 7, S908: 8, S909: 9, S910: 0]
- S911 : Dolby surround ON/OFF (SURROUND) switch.
- S912, 913 : Center speaker level adjustment (CENTER LEVEL) switches.
[S912: ▼, S913: ▲]
- S914, 915 : Rear speaker level adjustment (REAR LEVEL) switches.
[S914: ▼, S915: ▲]
- S916, 917, 921~923 : Input selector switches.
[S916: PHONO, S917: TUNER, S921: VCR2]
[S922: VCR1, S923: CD]
- S918 : Tape-monitor (TAPE/DAT MONITOR) switch.
- S919 : Test signal (TEST) switch.
- S920 : Center mode select (CENTER MODE) switch.
- S924 : Dolby 3 stereo ON/OFF (3 STEREO) switch.
- S925 : Loudness (LOUDNESS) switch.
- S926 : Tuning- mode selector (TUNING MODE) switch.
[AUTO↔MANUAL↔LOCK]
- S927, 928 : Band selector switches.
[S927: FM, S928: AM]
- S929 : FM mode selector (FM MODE) switch.
- S930 : Memory scan (MEMORY SCAN) switch.
- S931 : Memory (MEMORY) switch.
- S932 : Power " ⏻ STANDBY/ON" switch.
- Signal line
 - : FM OSC
 - ■ ■ ■ : AM OSC
 - ▬▬▬▬ : Rec out signal (Lch)
 - ▬▬▬▬ : Spectrum analyzer signal (Lch)
 - ▬▬▬▬ : Rear speaker drive signal (Lch)
 - ▬▬▬▬ : P. equalizer signal (Lch)
 - — — — : Positive voltage lines
 - - - - : Negative voltage lines
 - ▬▬▬▬ : FM signal
 - ▬▬▬▬ : AM signal
 - ▬▬▬▬ : AF signal (Lch)
 - ▬▬▬▬ : Center speaker drive signal

- All voltage values shown in circuitry are DC voltage in FM signal (Stereo signal) reception mode.
- * Figures in () Stand for DC-voltage in AM signal reception mode.
- The supply part number is described alone in the replacement parts list.

Ref. No.	Production Part No.	Supply Part No.
IC301	AN7470	SVIUPC1161C3
IC501, 503	M5238P	M5238P-1

* Caution!


- IC and LSI are sensitive to static electricity. Secondary trouble can be prevented by taking care during repair.
- * Cover the parts boxes made of plastics with aluminum foil.
- * Ground the soldering iron.
- * Put a conductive mat on the work table.
- * Do not touch the legs of IC or LSI with the fingers directly.

Note 2:

• Use of ceramic filters in pairs


The ceramic filters (CF201, CF202) for FM-IF circuit are available in three ranks. For this circuit, be sure to use the ceramics of the same rank in a pair. At repairing and replacement, pay close attention to the short jumpers (J956, J957) for use as different short jumpers must be used depending on each rank of the ceramic filters.

Color marking
(Blue, Red or Orange)

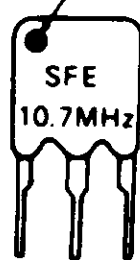

RANK (Color)	J956 (BL)	J957 (OR)	CENTER FREQUENCY
Blue	○	×	10.675 MHz
Red	○	○	10.700 MHz
Orange	×	○	10.725 MHz


Note: ○ mark: short jumper is used.
× mark: short jumper is not used.

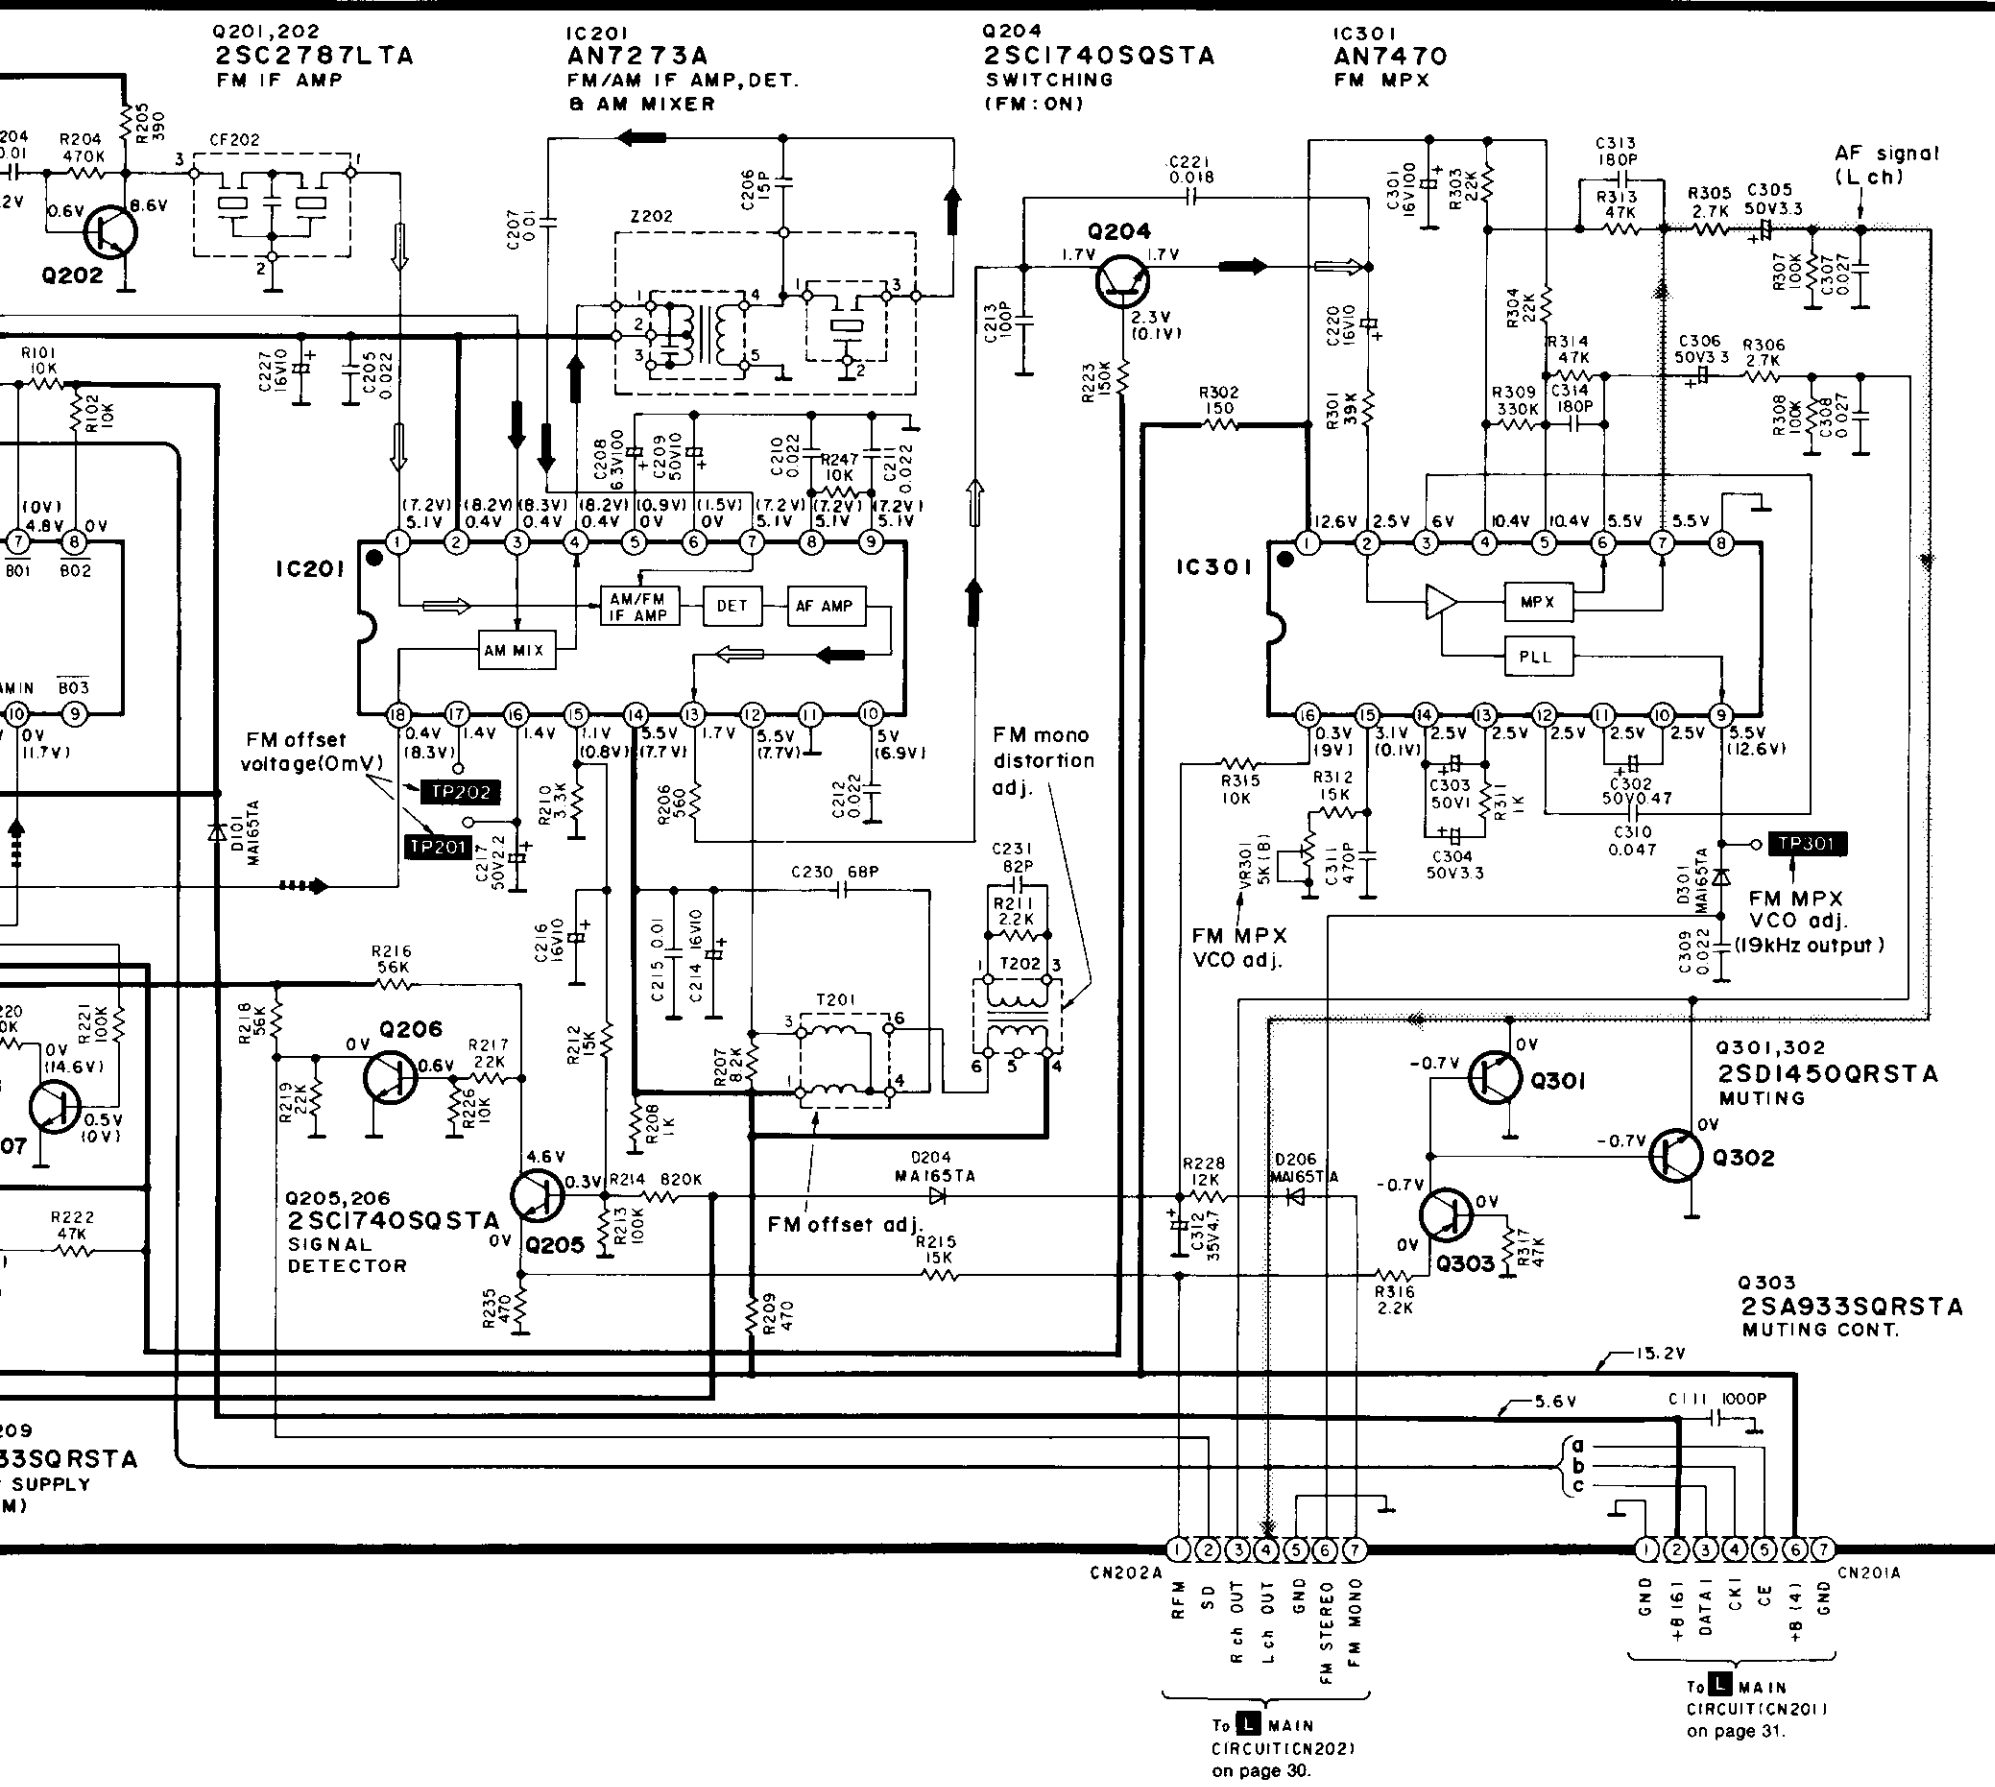

1 2 3 4 5

EXPLODED VIEWS

A
B
C
D
E
F

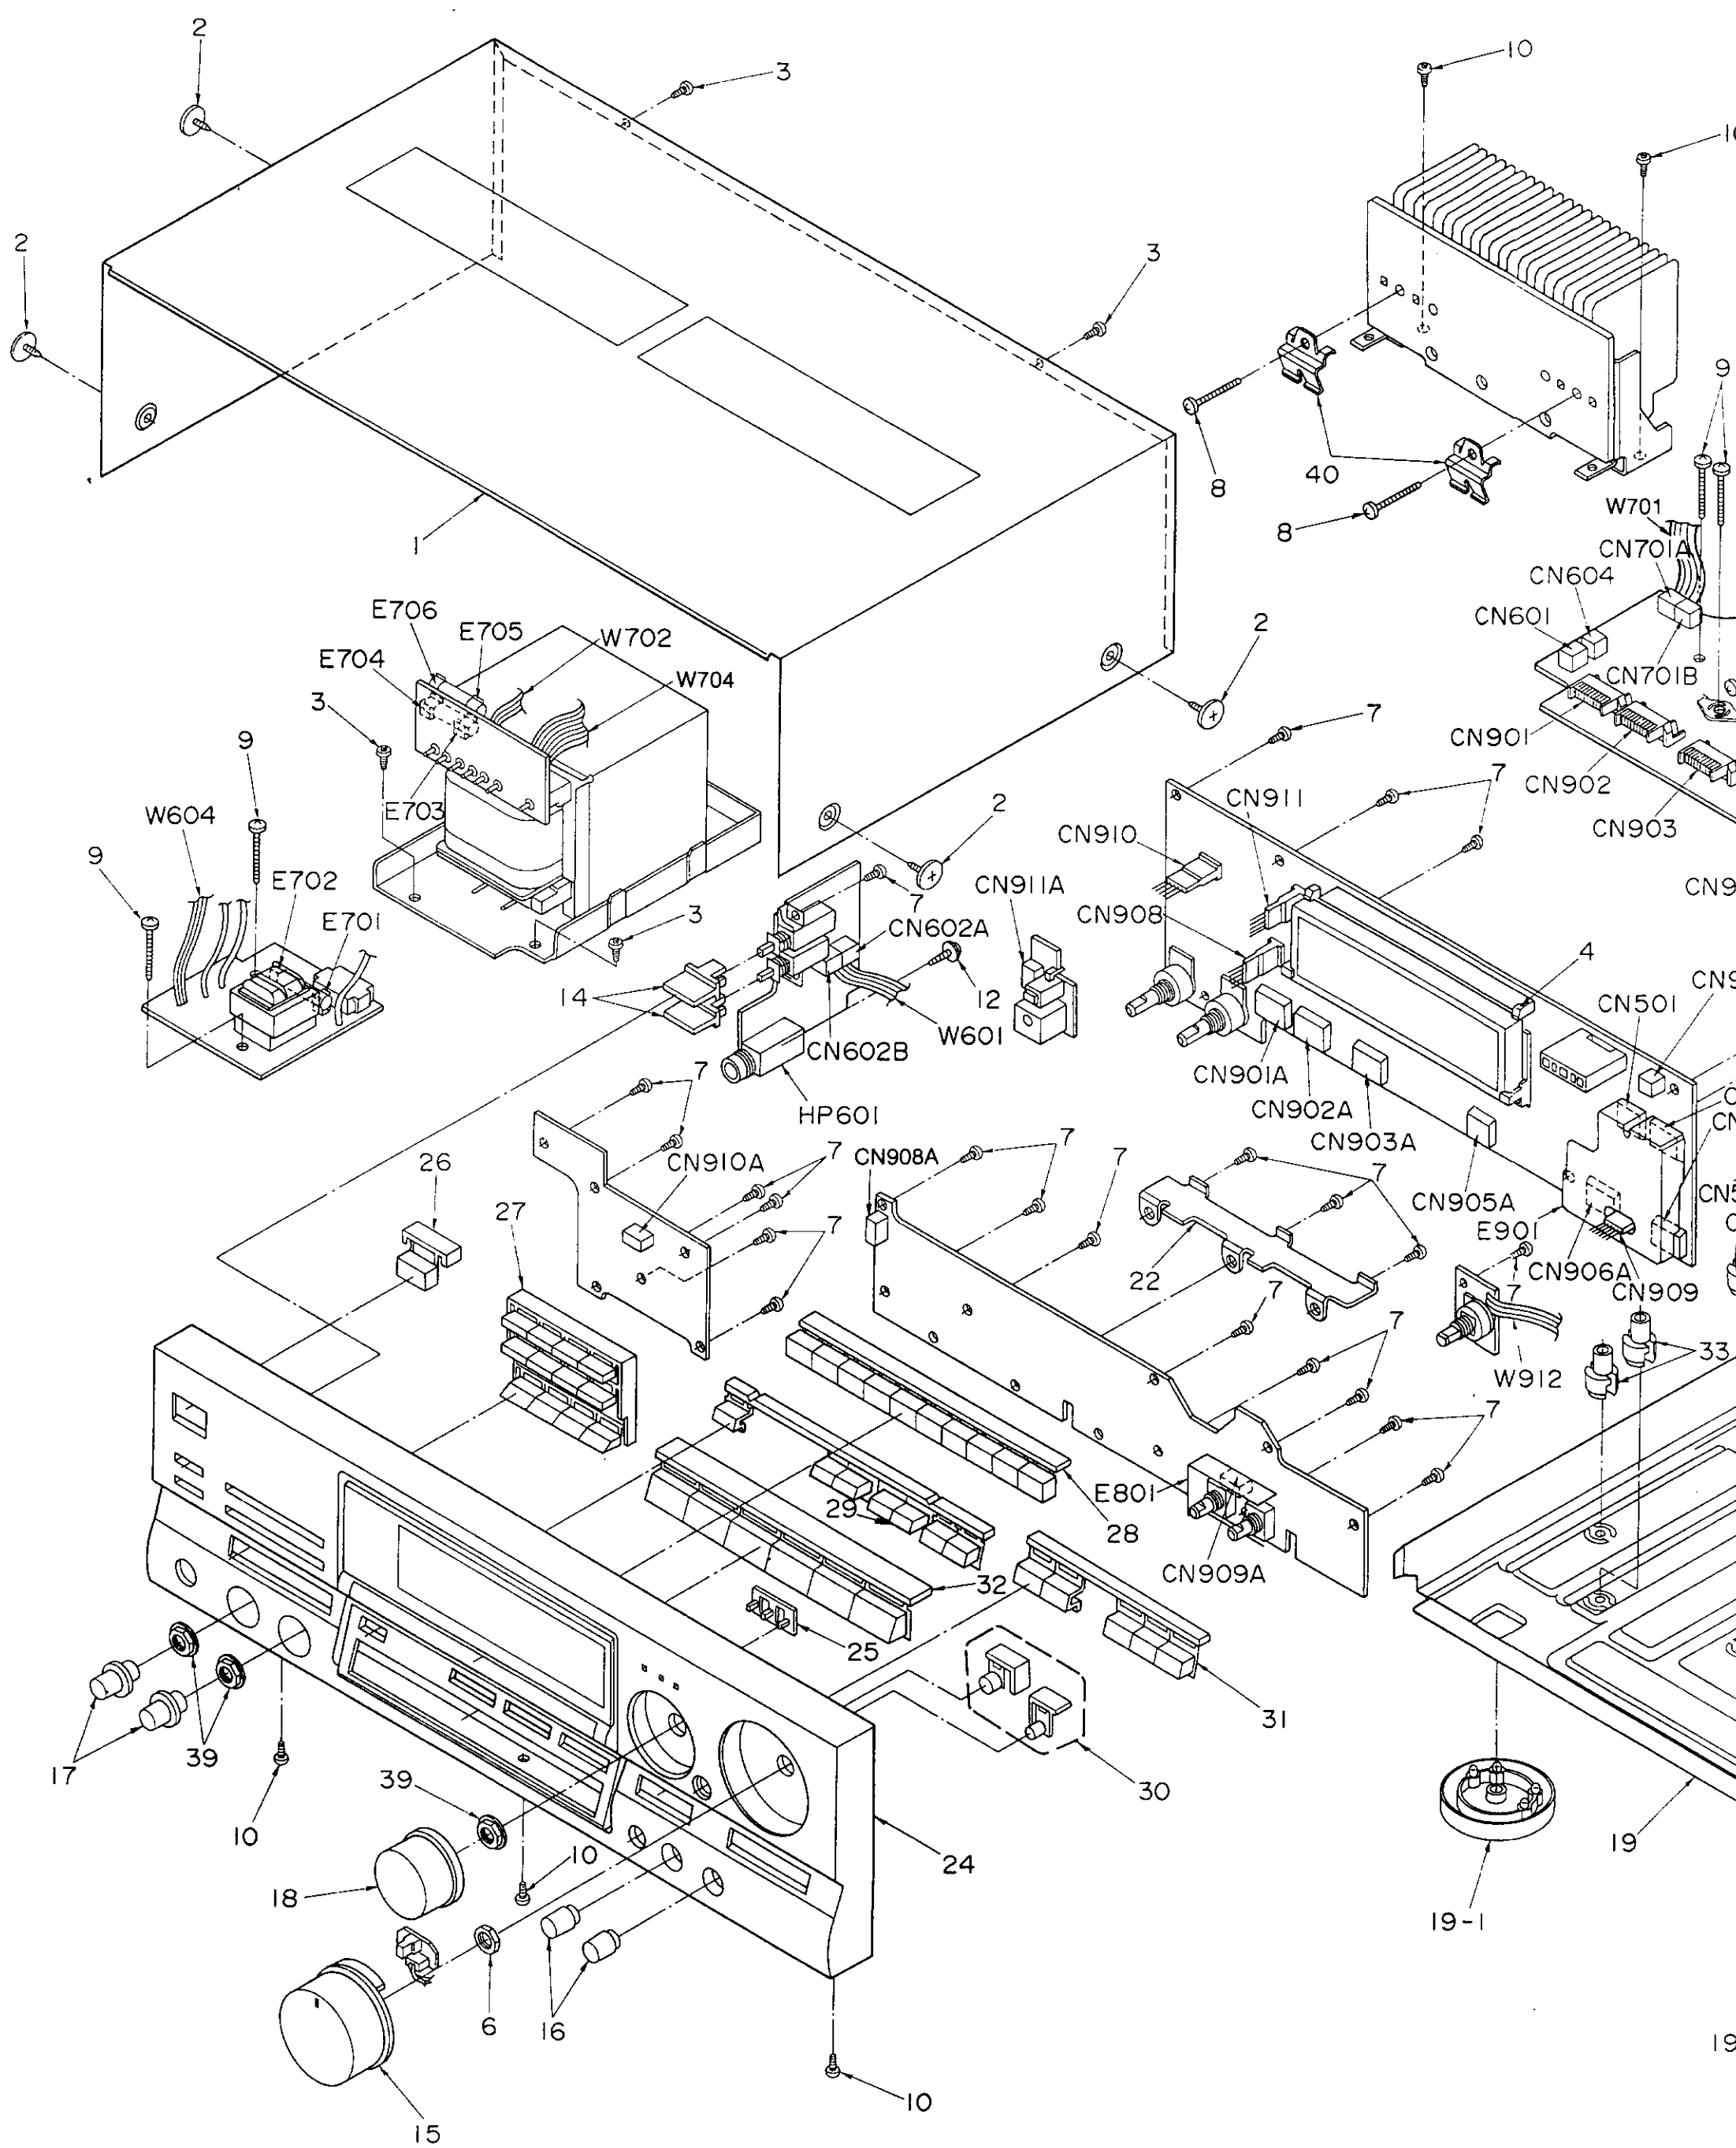

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS	
1	RMND016A-K	CABINET	
2	SNE2129-3	SCREW	
3	XTBS3+8JFZ1	SCREW	
4	RMND079-1	FL HOLDER	
5	REMD020-1	FAN UNIT	
5-1	MDN-4RB4MRC	MOTOR	
5-2	SHE232-1	FAN	
5-3	RMQ0209-K	FAN CASE	
5-4	RMQ0208-K	FAN CAP	
5-5	SUS271	SPRING	
5-6	RMQ0212-K	FAN TERMINAL CAP	
6	XNS7S	NUT	
7	XTBS26+8J	SCREW	
8	XTB3+16JFZ	SCREW	
9	XTB3+20JFZ	SCREW	
10	XTB3+8JFZ	SCREW	
11	XTWS3+10Q	SCREW	
12	XTWS3+8T	SCREW	
13	RGND126B-A1	REAR PANEL	
14	RGU0101	SPEAKER SELECTOR BUTTON	
15	RGW0070	VOLUME KNOB	
16	RGW0073	BALANCE KNOB	
17	RGW0083-1	BASS/TREBLE KNOB	
18	RGW0085	TUNING KNOB	
19	RFKJAGX500PP	CHASSIS ASS'Y	
19-1	RKAD009-1	FOOT	
20	RMA0295	PCB HOLD ANGLE A	
21	RMA0310	SUPPORT ANGLE	
22	RMNO139	PCB HOLD ANGLE B	
23	RSCO105	PHONO SHIELD PLATE	
24	RFKGAGX505P	FRONT PANEL ASS'Y	
25	RGLO129	PANEL LIGHT	
26	RGU0453-K	POWER BUTTON	
27	RGU0592	P. EQ BUTTON	
28	RGU0593	PRESET BUTTON	
29	RGU0594C	DOLBY BUTTON	
30	RGU0597	MODE BUTTON	
31	RGU0612A-K	BAND SELECTOR BUTTON	
32	RGU0613A-K	SELECTOR BUTTON	
33	SHE187-3	PCB SUPPORT	
34	SHR411	LATCH	
35	SHR415	LATCH	
36	SJS9233A	AC OUTLET COVER	
37	SJS9234A	AC INLET COVER	

Ref. No.	Part No.	Part Name & Description	Remarks
38	SNE2123	GND TERMINAL	
39	SNE4021-1	NUT	
40	SUS894-1	TRANSISTOR ANGLE	
41	RMA0309	SW ANGLE	
		PACKING MATERIAL	
P1	RPG0970	PACKING CASE	(P)
P1	RPG0971	PACKING CASE	(PC)
P2	RPN0324-2	PAD	
P3	XZB60X60A01	PROTECTION BAG (UNIT)	
P4	XZB24X33C04	PROTECTION BAG (F. B.)	(P)
P4	SPB1061	PROTECTION BAG (F. B.)	(PC)
P5	SPSD152	ACCESSORIES BOX	
		ACCESSORIES	
A1	RQT1151-P	INSTRUCTION MANUAL	(P)
A1	RFKSAGX505PC	INST. MANUAL ASS'Y	(PC)
A2	SQX7180	WARRANTY CARD	(P)
A2	SQX7183	WARRANTY CARD	(PC)
A3	SQX9129-1	SERVICENTER LIST	(P)
A3	SQX9131	SERVICENTER LIST	(PC)
A4	RAK-SA501P1	REMOTE CONTROL TRANSMITTER	
A4-1	RKK0020-K	BATTERY COVER	
A5	SJA172-1	AC POWER SUPPLY CORD	(P)△
A5	SJA172	AC POWER SUPPLY CORD	(PC)△
A6	SPB1163T	AM LOOP ANTENNA	
A6-1	SMA233-1M	AM ANTENNA HOLDER	
A6-2	XTN3+10AFZ	SCREW	
A7	SSA272M	FM INDOOR ANTENNA	

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT(S)		Q503, 504	2SC3327-A	TRANSISTOR	
				Q505, 506	2SA1309A-R	TRANSISTOR	
				Q508	UN4211	TRANSISTOR	
IC101	LM7001	IC, PLL FREQ. SYNTHESIZER		Q509, 510	2SC1740SQ	TRANSISTOR	
IC201	AN7273A	IC, FM/AM IF AMP&MIXER		Q511, 512	2SC3327-A	TRANSISTOR	
IC301	SVIUPC1161C3	IC, FM MPX		Q513	2SC1740SQ	TRANSISTOR	
IC351	TC4053BP	IC, VIDEO SELECTOR		Q601	2SA992EFTA	TRANSISTOR	
IC401	TC9163N	IC, INPUT SELECTOR		Q651	2SA1309A-R	TRANSISTOR	
IC451	AN6558F	IC, PHONO EQ. AMP		Q652	2SC3311A-Q	TRANSISTOR	
IC501	M5238P-1	IC, BUFFER AMP		Q701, 702	2SD1761DEF	TRANSISTOR	△
IC502	AN6558F	IC, BUFFER AMP		Q703	2SC2631QRSTA	TRANSISTOR	△
IC503	M5238P-1	IC, BUFFER AMP		Q704	2SC3311A-Q	TRANSISTOR	
IC601	SV13206C	IC, POWER AMP	△	Q705	2SC3940AQSTA	TRANSISTOR	
IC801	M50946-150FP	IC, MICROCOMPUTER	—	Q708	2SB1187DEF	TRANSISTOR	△
IC802	TC74HC42AP	IC, BCD/DECIMAL DECODER		Q709	2SC2631QRSTA	TRANSISTOR	△
IC803	XR-1091DCP	IC, SPECTRUM ANALYZER		Q710	2SB1187DEF	TRANSISTOR	△
IC851	BA6218	IC, MOTOR DRIVE		Q713	2SC3311A-Q	TRANSISTOR	△
IC901	MN187125STU	IC, MICROCOMPUTER		Q751	2SC1740SQ	TRANSISTOR	
IC971	MC14094BCP	IC, LED DRIVE		Q752	2SC3940AQSTA	TRANSISTOR	
IC1001	TC9162N	IC, INPUT SELECTOR		Q801	UN4214TA	TRANSISTOR	
IC1002	LA2775	IC, NOISE SEQUENCER		Q802	UN4211	TRANSISTOR	
IC1003	LA2770	IC, DOLBY PROLOGIC		Q803	UN4111	TRANSISTOR	
IC1004	M5218AP	IC, BUFFER AMP		Q804-813	UN4115	TRANSISTOR	
IC1301	SV13101C	IC, POWER AMP (REAR)	△	Q814, 815	UN4211	TRANSISTOR	
IC1401	TA7629P	IC, DOLBY B NR		Q891	UN4113TA	TRANSISTOR	
IC1402	AN6554F	IC, BUFFER AMP		Q892	UN4214TA	TRANSISTOR	
IC1403	TC9212P	IC, ATTENUATOR		Q894	UN4211	TRANSISTOR	
IC1404	AN6554F	IC, BUFFER AMP		Q895	2SB1240PRTV6	TRANSISTOR	
IC1405	M50198P	IC, DIGITAL DELAY		Q896	2SC1740SQ	TRANSISTOR	
IC2001	LV3100M	IC, PARAMETRIC EQUALIZER		Q897	2SB1240PRTV6	TRANSISTOR	
IC2002	TC9214P	IC, ANALOG SWITCH		Q901	UN4214TA	TRANSISTOR	
IC2003	M5218AP	IC, BUFFER AMP		Q902	2SA933SQR	TRANSISTOR	
		TRANSISTOR(S)		Q903	UN4211	TRANSISTOR	
				Q904, 905	2SC1740SQ	TRANSISTOR	
				Q906	2SA933SQR	TRANSISTOR	
Q101, 102	2SC2785FE	TRANSISTOR		Q971-973	UN4215	TRANSISTOR	
Q103, 104	UN4214TA	TRANSISTOR		Q1001-1003	UN4211	TRANSISTOR	
Q201, 202	2SC2787L	TRANSISTOR		Q1004	2SC1740SQ	TRANSISTOR	
Q204-207	2SC1740SQ	TRANSISTOR		Q1005, 1006	2SC3327-A	TRANSISTOR	
Q208, 209	2SA933SQR	TRANSISTOR		Q1007	2SA1309A-R	TRANSISTOR	
Q210	2SC1740SQ	TRANSISTOR		Q1301	2SC3327-A	TRANSISTOR	
Q301, 302	2SD1450QRSTA	TRANSISTOR		Q1302	2SA1309A-R	TRANSISTOR	
Q303	2SA933SQR	TRANSISTOR		Q1303	2SC3327-A	TRANSISTOR	
Q351, 352	2SC3311A-Q	TRANSISTOR		Q1304	2SA1309A-R	TRANSISTOR	
Q353, 354	2SA720NC-Q	TRANSISTOR				DIODE (S)	
Q355	2SC1740SQ	TRANSISTOR					
Q501, 502	2SJ40CDTA	TRANSISTOR					



Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
D101	MA165	DIODE		VR802	EVQWQ202224B	V. R. LEVEL/TREBLE	
D204	MA165	DIODE		VR971	EVQWPCF2024B	V. R. ROTARY TUNING	
D206	MA165	DIODE		VR1001	EVJ02SF01G15	V. R. SURROUND BALANCE	
D301	MA165	DIODE				COMPONENT COMBINATION(S)	
D351	MA4030MTA	DIODE		Z201	RLA2Z001-T	COMPONENT COMBINATION	
D352, 353	MA165	DIODE		Z202	SLI7Z101-T	COMPONENT COMBINATION	
D501	MA700	DIODE		Z801, 802	EXFP12331MF	COMPONENT COMBINATION	
D502-507	MA165	DIODE		Z803	EXBF12E104J	COMPONENT COMBINATION	
D553	LN846RP	L. E. D.		Z804, 805	EXBF9E473J	COMPONENT COMBINATION	
D602, 603	MA4120	DIODE		Z891	HC-521	REMOTE SENSOR	
D651	MA165	DIODE		Z904	EXBF7E103J	COMPONENT COMBINATION	
D652	MA4068M	DIODE		Z905	EXBF6E103J	COMPONENT COMBINATION	
D701-704	P300DLF	DIODE	△	Z906	EXBF6E104J	COMPONENT COMBINATION	
D705	MA4062MTA	DIODE		Z907	EXFP8331MW	COMPONENT COMBINATION	
D706	MA4068M	DIODE		Z908	EXBF9E104J	COMPONENT COMBINATION	
D709	MA4330MTA	DIODE				COIL(S)	
D710	MA29WA	DIODE	△	L101	RLQZP47KT-Y	COIL	
D711	MA4160-L	DIODE		L203, 204	ELEPK1R0MA	COIL	
D712	MA4082MTA	DIODE	△	L601, 602	SLQV07G-40	COIL	
D751-754	1SR35200TB	DIODE	△	L801	RLQZP101KT-Y	COIL	
D755	MA165	DIODE		L802-804	RLQZP4R7KT-Y	COIL	
D757	MA4068M	DIODE		L851, 852	RLQZP1R0KT-Y	COIL	
D785	MA165	DIODE		L901, 902	ELEPK101KA	COIL	
D801	1SS291TA	DIODE		L903	ELEXT101KA9	COIL	
D802-804	MA165	DIODE		L1401	ELEPK101KA	COIL	
D808, 809	MA4062MTA	DIODE				TRANSFORMER(S)	
D814, 815	MA165	DIODE		T201	RLI4B012-Z	TRANSFORMER	
D851	1SR35200TB	DIODE	△	T202	RLI4B013-Z	TRANSFORMER	
D891, 892	MA165	DIODE		T701	RTP1Q5C004-V	POWER TRANSFORMER	△
D893	LN018304P	L. E. D.		T751	RTP1H5C001-V	TRANSFORMER	△
D894, 895	MA165	DIODE				FUSE(S)	
D901	1SS291TA	DIODE		F1	XBA1F60NJ14	FUSE, 125V 6A	△
D902	MA165	DIODE		F2, 3	XBA1F25NJ14	FUSE, 125V 2.5A	△
D903	MA4056MTA	DIODE				FILTER(S) & OSCILLATOR(S)	
D904, 905	MA165	DIODE		CF201, 202	RLFETNGM02LA	RED (10.700MHz)	
D908	MA165	DIODE		CF201, 202	RLFETNGM02LB	BLUE (10.675MHz)	
D910-917	MA165	DIODE		CF201, 202	RLFETNGM02LC	ORANGE (10.725MHz)	
D971	MA165	DIODE		CF901	FFOCC6000A	OSCILLATOR (6MHz)	
D972-974	LN031527PH	LED BLOCK		CF901	EFOGC4194T4	OSCILLATOR (4.19MHz)	
D1001	MA4120	DIODE				OSCILLATOR(S)	
D1002	MA165	DIODE					
D1301-1304	GP15GLF	DIODE	△				
D1401	MA4120	DIODE					
D1402	MA165	DIODE					
D2002-2005	MA165	DIODE					
		VARIABLE RESISTOR(S)					
VR301	EVNDXA00B53	V. R. FM VCO ADJ.					
VR501	EUMAJTF25B15	V. R. MAIN VOLUME					
VR502	EVJ02SF01G15	V. R. BALANCE					
VR801	EVQWQ202224B	V. R. CENTER FREQ/BASS					

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
X101	SVQ49U722-S	OSCILLATOR(7.2MHz)		S928	EVQ21405R	SW, BAND SELECTOR(AM)	
X1401	EF0GC3004T4	OSCILLATOR(3MHz)		S929	EVQ21405R	SW, FM MODE	
		DISPLAY TUBE		S930	EVQ21405R	SW, MEMORY SCAN	
				S931	EVQ21405R	SW, MEMORY	
				S932	EVQ21405R	SW, POWER	
FL901	RSL0101-F	DISPLAY TUBE				CONNECTOR(S) & SOCKET(S)	
		SWITCH(ES)					
S601	RSP2008-J	SW, SPEAKERS		CN201	RJT057W007-1	CONNECTOR(7P)	
S702	RSS3B004S	SW, SPEAKER IMPEDANCE	△	CN201A	RJU057W007	SOCKET(7P)	
S801	EVQ21405R	SW, DISPLAY MODE		CN202	RJT057W007-1	CONNECTOR(7P)	
S802	EVQ21405R	SW, EQ1		CN202A	RJU057W007	SOCKET(7P)	
S803	EVQ21405R	SW, EQ2		CN351	RJT057W007-1	CONNECTOR(7P)	
S804	EVQ21405R	SW, EQ3		CN351A	RJU057W007	SOCKET(7P)	
S805	EVQ21405R	SW, EQ4		CN501	RJT003K006M1	CONNECTOR(6P)	
S806	EVQ21405R	SW, P. EQ SYS ON/OFF		CN502	RJT003K008M1	CONNECTOR(8P)	
S807	EVQ21405R	SW, FINE		CN601	RJS1A1704	SOCKET(4P)	
S808	EVQ21405R	SW, SLOPE(Q)		CN604	RJS1A1703	CONNECTOR(3P)	
S809	EVQ21405R	SW, P. EQ/TONE		CN705	REF0023	CONNECTOR ASS'Y(2P)	
S810	EVQ21405R	SW, MEMORY		CN901A	RJT003K008M1	CONNECTOR(8P)	
S811	EVQ21405R	SW, FIXED PRESET		CN901	RJU003K008M1	SOCKET(8P)	
S812	EVQ21405R	SW, MANUAL PRESET 1		CN902A	RJT003K008M1	CONNECTOR(8P)	
S813	EVQ21405R	SW, MANUAL PRESET 2		CN902	RJU003K008M1	SOCKET(8P)	
S814	EVQ21405R	SW, MANUAL PRESET 3		CN903A	RJT003K008M1	CONNECTOR(8P)	
S901	EVQ21405R	SW, PRESET TUNING 1		CN903	RJU003K008M1	SOCKET(8P)	
S902	EVQ21405R	SW, PRESET TUNING 2		CN905A	RJT003K006M1	CONNECTOR(6P)	
S903	EVQ21405R	SW, PRESET TUNING 3		CN905	RJU003K006M1	SOCKET(6P)	
S904	EVQ21405R	SW, PRESET TUNING 4		CN906A	RJT003K008M1	CONNECTOR(8P)	
S905	EVQ21405R	SW, PRESET TUNING 5		CN906	RJU003K008M1	SOCKET(8P)	
S906	EVQ21405R	SW, PRESET TUNING 6		CN907A	RJT003K008M1	CONNECTOR(8P)	
S907	EVQ21405R	SW, PRESET TUNING 7		CN907	RJU003K008M1	SOCKET(8P)	
S908	EVQ21405R	SW, PRESET TUNING 8		CN908, 909	SJT30648BB1	CONNECTOR(6P)	
S909	EVQ21405R	SW, PRESET TUNING 9		CN910	SJT30548BB1	CONNECTOR(5P)	
S910	EVQ21405R	SW, PRESET TUNING 0		CN911	SJT30549BB1	CONNECTOR(5P)	
S911	EVQ21405R	SW, SURROUND		CN912	RJS1A1703	CONNECTOR(3P)	
S912	EVQ21405R	SW, CENTER LEVEL(DOWN)		CN1001	RJT057W007-1	CONNECTOR(7P)	
S913	EVQ21405R	SW, CENTER LEVEL(UP)		CN1001A	RJU057W007	SOCKET(7P)	
S914	EVQ21405R	SW, REAR LEVEL(DOWN)		CN1002	RJT057W007-1	CONNECTOR(7P)	
S915	EVQ21405R	SW, REAR LEVEL(UP)		CN1002A	RJU057W007	SOCKET(7P)	
S916	EVQ21405R	SW, INPUT SELECTOR(PHONO)		CN1003	RJT057W007-1	CONNECTOR(7P)	
S917	EVQ21405R	SW, INPUT SELECTOR(TUNER)		CN1003A	RJU057W007	SOCKET(7P)	
S918	EVQ21405R	SW, TAPE/DAT MONITOR		CN1004	RJT057W007-1	CONNECTOR(7P)	
S919	EVQ21405R	SW, TEST		CN1004A	RJU057W007	SOCKET(7P)	
S920	EVQ21405R	SW, CENTER MODE		CN1301	RJT057W007-1	CONNECTOR(7P)	
S921	EVQ21405R	SW, INPUT SELECTOR(VCR2)		CN1301A	RJU057W007	SOCKET(7P)	
S922	EVQ21405R	SW, INPUT SELECTOR(VCR1)		CN1302	RJT057W007-1	CONNECTOR(7P)	
S923	EVQ21405R	SW, INPUT SELECTOR(CD)		CN1302A	RJU057W007	SOCKET(7P)	
S924	EVQ21405R	SW, 3 STEREO		CN1303	RJT057W007-1	CONNECTOR(7P)	
S925	EVQ21405R	SW, LOUDNESS		CN1303A	RJU057W007	SOCKET(7P)	
S926	EVQ21405R	SW, TUNING MODE		CN501A	RJU003K006M1	SOCKET(6P)	
S927	EVQ21405R	SW, BAND SELECTOR(FM)		CN502A	RJU003K008M1	SOCKET(8P)	
				CN602A	RJS1A1704	SOCKET(4P)	

Ref. No.	Part No.	Part Name & Description	Remarks
CN701A	RJS1A1704	SOCKET (4P)	
CN705A	SJT3213	CONNECTOR (2P)	
CN908A	SJS50681BB	SOCKET (6P)	
CN909A	SJS50681BB	SOCKET (6P)	
CN910A	SJS50581BB	SOCKET (5P)	
CN911A	SJS50581BB	SOCKET (5P)	
CN602B	RJS1A1704	SOCKET (4P)	
CN701B	RJS1A1704	SOCKET (4P)	
CN703C	RJS1A1704	SOCKET (4P)	
CN703D	RJS1A1703	CONNECTOR (3P)	
		SHIELD PART (S)	
E401	SNE1004-1	GND PLATE	
E404, 405	SME103-6	P. C. B. HOLDER	
E701-706	RJR0011	FUSE HOLDER	
E707	SNE1004-1	GND PLATE	
E801	RSC0218	SHIELD PLATE	
E901	RSC0219	SHIELD PLATE	
		JACK (S)	
JK101	RJH4405	ANTENNA TERMINAL	
JK351	SJF3069-3N	VCR1/VCR2/VIDEO OUT	
JK401	SJF3069N	TERMINAL, PHONO/CD	
JK402	SJF3069N	TERMINAL, TAPE/DAT	
JK404	SJF3069N	TERMINAL, VCR 1/VCR2	
JK405	SJF3068N	TERMINAL, VCR 1	
JK408	SJFD7	CENTER OUT	
JK409	RJJ33TR01	REMOTE CONTROL OUT	

Ref. No.	Part No.	Part Name & Description	Remarks
JK601	RJR0054	FRONT SPEAKERS A	
JK602	RJR0054	FRONT SPEAKERS B	
JK603	RJR0054	REAR SPEAKERS	
JK604	SJF5201-1	CENTER SPEAKER	
JK651	RJS1A7402-1	MOTOR JACK	
JK791	SJS9233B	AC OUTLET	△
JK792	SJS9233B	AC OUTLET	△
JK793	SJS9234B	AC INLET	△
HP601	RJJ63TS01	HEADPHONES JACK	
		RELAY (S)	
RL601	SSY134	RELAY	
RL751	RSY0005-1C	RELAY	△
		FRONT END PACK ASS'Y	
TN101	RAL0006	FM FRONT END	
		FLAT CABLE (S)	
W601	RWJ1804120QK	FLAT CABLE (4P)	
W602	RWJ1808320QK	FLAT CABLE (8P)	
W604	RWJ1803120QK	FLAT CABLE (3P)	
W701	RWJ1808240QK	FLAT CABLE (8P)	
W702	RWJ1803220KK	FLAT CABLE (3P)	
W703	RWJ1807430QK	FLAT CABLE (7P)	
W704	RWJ1807160KK	FLAT CABLE (7P)	
W912	RWJ1803110QK	FLAT CABLE (3P)	

PACKING

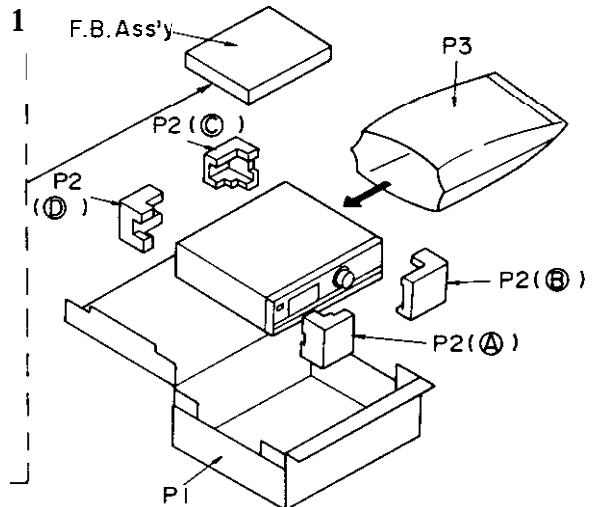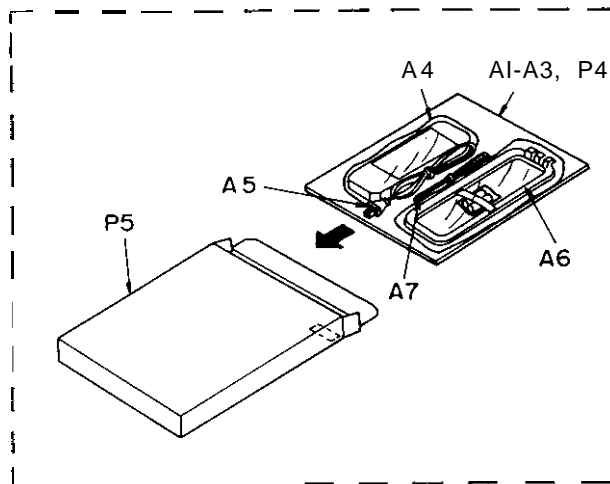

[P2 (A) (B) (C) (D) : Part No. RPN0324-2]

RESISTORS & CAPACITORS

Notes: • Capacity value are in microfarads (μF) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)
 • Resistance values are in ohms. unless specified otherwise, 1K=1,000 (OHM), 1M=1,000k (OHM)


Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
		RESISTORS	R307, 308	ERDS2TJ104	1/4W 100K	R519, 520	ERDS2TJ472	1/4W 4.7K
			R309	ERDS2TJ334	1/4W 330K	R521, 522	ERDS2TJ393	1/4W 39K
			R311	ERDS2TJ102	1/4W 1K	R523, 524	ERDS2TJ222	1/4W 2.2K
R101, 102	ERDS2TJ103	1/4W 10K	R312	ERDS2TJ153	1/4W 15K	R525, 526	ERDS2TJ221	1/4W 220
R104	ERDS2TJ102	1/4W 1K	R313, 314	ERDS2TJ473	1/4W 47K	R527-530	ERDS2TJ102	1/4W 1K
R105	ERDS2TJ561	1/4W 560	R315	ERDS2TJ103	1/4W 10K	R531	ERDS2TJ394	1/4W 390K
R106	ERDS2TJ562	1/4W 5.6K	R316	ERDS2TJ222	1/4W 2.2K	R532	ERDS2TJ103	1/4W 10K
R107	ERDS2TJ103	1/4W 10K	R317	ERDS2TJ473	1/4W 47K	R533	ERDS2TJ104	1/4W 100K
R108	ERDS2TJ151	1/4W 150	R347	ERDS2TJ272T	1/4W 2.7K	R534	ERDS2TJ103	1/4W 10K
R109-111	ERDS2TJ104	1/4W 100K	R348	ERDS2TJ221	1/4W 220	R535	ERDS2TJ104	1/4W 100K
R201	ERDS2TJ152	1/4W 1.5K	R351, 352	ERDS2EJ820	1/4W 82	R538	ERDS2TJ684	1/4W 680K
R202	ERDS2TJ824	1/4W 820K	R353, 354	ERDS2TJ104	1/4W 100K	R539	ERDS2TJ153	1/4W 15K
R203	ERDS2TJ122	1/4W 1.2K	R355-357	ERDS2TJ680T	1/4W 68	R540	ERDS2TJ223	1/4W 22K
R204	ERDS2TJ474	1/4W 470K	R358	ERDS2TJ272T	1/4W 2.7K	R542	ERDS2TJ222	1/4W 2.2K
R205	ERDS2TJ391	1/4W 390	R359	ERDS2TJ330	1/4W 33	R543	ERDS2TJ824	1/4W 820K
R206	ERDS2TJ561	1/4W 560	R360	ERDS2TJ560T	1/4W 56	R544	ERDS2TJ272T	1/4W 2.7K
R207	ERDS2TJ822	1/4W 8.2K	R361-363	ERDS2TJ680T	1/4W 68	R545	ERDS2TJ104	1/4W 100K
R208	ERDS2TJ102	1/4W 1K	R364	ERDS2TJ330	1/4W 33	R546	ERDS2TJ103	1/4W 10K
R209	ERDS2TJ471	1/4W 470	R365	ERDS2TJ560T	1/4W 56	R547	ERDS2TJ183T	1/4W 18K
R210	ERDS2TJ332	1/4W 3.3K	R366	ERDS2TJ473	1/4W 47K	R550	ERDS2TJ103	1/4W 10K
R211	ERDS2TJ222	1/4W 2.2K	367, 368	ERDS2TJ272T	1/4W 2.7K	R551	ERDS2TJ104	1/4W 100K
R212	ERDS2TJ153	1/4W	R369	ERDS2TJ103	1/4W 10K	R552	ERDS2TJ392T	1/4W 3.9K
R213	ERDS2TJ104	1/4W 100K	R370, 371	ERDS2TJ473	1/4W 47K	R553	ERDS2TJ103	1/4W 10K
R214	ERDS2TJ824	1/4W 820K	R372	ERDS2TJ102	1/4W 1K	R554	ERDS2TJ223	1/4W 22K
R215	ERDS2TJ153	1/4W 15K	R373	ERDS2TJ103	1/4W 10K	R555	ERDS2TJ472	1/4W 4.7K
R216	ERDS2TJ563	1/4W 56K	R401, 402	ERDS2TJ332	1/4W 3.3K	R556	ERDS2TJ104	1/4W 100K
R217	ERDS2TJ223	1/4W 22K	R403, 404	ERDS2TJ822	1/4W 8.2K	R557	ERDS2TJ471	1/4W 470
R218	ERDS2TJ563	1/4W 56K	R405, 406	ERDS2TJ470	1/4W 47	R558	ERDS2TJ103	1/4W 10K
R219	ERDS2TJ223	1/4W 22K	R411-420	ERDS2TJ102	1/4W 1K	R559-561	ERDS2TJ104	1/4W 100K
R220	ERDS2TJ103	1/4W 10K	R421, 422	ERDS2TJ222	1/4W 2.2K	R601, 602	ERDS2TJ102	1/4W 1K
R221	ERDS2TJ104	1/4W 100K	R429-431	ERDS2TJ103	1/4W 10K	R603, 604	ERDS2TJ563	1/4W 56K
R222	ERDS2TJ473	1/4W 47K	R451, 452	ERDS2TJ821	1/4W 820	R605, 606	ERDS2TJ182	1/4W 1.8K
R223	ERDS2TJ154	1/4W 150K	R453, 454	ERDS2TJ224T	1/4W 220K	R607, 608	ERDS2TJ563	1/4W 56K
R226	ERDS2TJ103	1/4W 10K	R455, 456	ERDS2TJ563	1/4W 56K	R609, 610	ERDS2TJ470	1/4W 47
R228	ERDS2TJ123	1/4W 12K	R457, 458	ERDS2TJ271	1/4W 270	R611, 612	ERDS1FVJ190T	1/2W 10 Δ
R229	ERDS2TJ102	1/4W 1K	R459, 460	ERDS2TJ680T	1/4W 68	R613	ERDS2TJ223	1/4W 22K
R230	ERDS2TJ104	1/4W 100K	R461, 462	ERDS2TJ184T	1/4W 180K	R614	ERD25FJ470	1/4W 47 Δ
R231	ERDS2TJ471	1/4W 470	R463, 464	ERDS2TJ123	1/4W 12K	R615	ERDS2TJ473	1/4W 47K Δ
R232	ERDS2TJ122	1/4W 1.2K	R465, 466	ERDS2TJ563	1/4W 56K	R616-618	ERDS1FVJ221T	1/2W 220 Δ
R233	ERDS2TJ684	1/4W 680K	R467, 468	ERDS2TJ102	1/4W 1K	R619, 620	ERG2ANJP331S	2W 330
R234	ERDS2TJ103	1/4W 10K	R501, 502	ERDS2TJ222	1/4W 2.2K	R621, 622	ERDS2TJ222	1/4W 2.2K
R235	ERDS2TJ471	1/4W 470	R503, 504	ERDS2TJ102	1/4W 1K	R623	ERDS2TJ684	1/4W 680K
R237	ERDS2TJ221	1/4W 220	R505, 506	ERDS2TJ473	1/4W 47K	R624	ERDS2TJ103	1/4W 10K Δ
R238	ERDS2TJ471	1/4W 470	R507, 508	ERDS2TJ104	1/4W 100K	R627	ERDS2TJ154	1/4W 150K
R247	ERDS2TJ103	1/4W 10K	R509-512	ERDS2TJ103	1/4W 10K	R628	ERDS2TJ684	1/4W 680K
R301	ERDS2TJ393	1/4W 39K	R513	ERDS2TJ153	1/4W 15K	R629, 630	ERDS1FVJ181T	1/2W 180 Δ
R302	ERDS2TJ151	1/4W 150	R514	ERDS2TJ394	1/4W 390K	R631	ERDS2TJ103	1/4W 10K
R303, 304	ERDS2TJ223	1/4W 22K	R515, 516	ERDS2TJ104	1/4W 100K	R632	ERD25FJ101	1/4W 100 Δ
R305, 306	ERDS2TJ272T	1/4W 2.7K	R517, 518	ERDS2TJ563	1/4W 56K	R651-654	ERDS2TJ223	1/4W 22K

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
R655	ERDS2TJ392T	1/4W 3.9K	R843, 844	ERDS2TJ182	1/4W 1.8K	R1026, 1027	ERDS2TJ103	1/4W 10K
R656, 657	ERDS2TJ103	1/4W 10K	R845-849	ERDS2TJ473	1/4W 47K	R1028	ERDS2TJ473	1/4W 47K
R658	ERDS2TJ223	1/4W 22K	R851	ERDS1FVJ2R2T	1/2W 2.2 Δ	R1301, 1302	ERDS2TJ222	1/4W 2.2K
R659-661	ERDS1FVJ220T	1/2W 22 Δ	R853	ERDS2TJ473	1/4W 47K	R1303, 1304	ERDS2TJ563	1/4W 56K
R662	ERDS2TJ104	1/4W 100K	R891	ERDS2TJ102	1/4W 1K	R1307, 1308	ERDS2TJ563	1/4W 56K
R701	ERDS1FVJ332T	1/2W 3.3K Δ	R893	ERDS2TJ333	1/4W 33K	R1309, 1310	ERDS2TJ332	1/4W 3.3K
R702	ERDS2TJ122	1/4W 1.2K	R894	ERDS2TJ102	1/4W 1K	R1311	ERDS2TJ684	1/4W 680K
R703	ERDS2TJ272T	1/4W 2.7K	R895	ERDS2TJ103	1/4W 10K	R1313	ERDS2TJ564	1/4W 560K Δ
R704	ERDS2TJ222	1/4W 2.2K	R896	ERDS2TJ222	1/4W 2.2K	R1314	ERDS2TJ154	1/4W 150K
R705	ERDS2TJ272T	1/4W 2.7K Δ	R897	ERDS2TJ221	1/4W 220	R1315, 1316	ERD25FVJ4R7T	1/4W 4.7 Δ
R706, 707	ERDS2TJ1R2	1/4W 1.2 Δ	R898	ERDS2TJ223	1/4W 22K	R1317, 1318	ERDS2TJ104	1/4W 100K
R708, 709	ERDS1FVJ180T	1/2W 18 Δ	R899	ERDS2TJ473	1/4W 47K	R1319, 1320	ERDS2TJ222	1/4W 2.2K
R710	ERDS2TJ272T	1/4W 2.7K	R901	ERDS2TJ102	1/4W 1K	R1321, 1322	ERDS2TJ104	1/4W 100K
R711	ERDS1FVJ2R2T	1/2W 2.2 Δ	R902	ERDS2TJ681	1/4W 680	R1323	ERDS2TJ102	1/4W 1K
R713	ERDS2TJ183T	1/4W 18K Δ	R903, 904	ERDS2TJ103	1/4W 10K	R1324	ERDS2TJ824	1/4W 820K
R714	ERDS2TJ102	1/4W 1K Δ	R905, 906	ERDS2TJ102	1/4W 1K	R1325	ERDS2TJ102	1/4W 1K
R715	ERDS2TJ101	1/4W 100 Δ	R907, 908	ERDS2TJ182	1/4W 1.8K	R1326, 1327	ERDS2TJ103	1/4W 10K
R716	ERDS2TJ222	1/4W 2.2K Δ	R909, 910	ERDS2TJ222	1/4W 2.2K	R1328	ERD25FJ470	1/4W 47 Δ
R717	ERD25FVJ150T	1/4W 15 Δ	R911, 912	ERDS2TJ392T	1/4W 3.9K	R1329	ERDS2TJ824	1/4W 820K
R718, 719	ERDS2TJ1R5T	1/4W 1.5 Δ	R913, 914	ERDS2TJ562	1/4W 5.6K	R1405-1410	ERDS2TJ153	1/4W 15K
R753, 754	ERDS2TJ472	1/4W 4.7K	R915, 916	ERDS2TJ123	1/4W 12K	R1411	ERDS2TJ272T	1/4W 2.7K
R755	ERDS2TJ102	1/4W 1K	R917, 918	ERDS2TJ273	1/4W 27K	R1424	ERD25FJ470	1/4W 47 Δ
R771, 772	ERDS1FVJ2R2T	1/2W 2.2 Δ	R919	ERDS2TJ224T	1/4W 220K	R1431	ERDS2TJ105T	1/4W 1M
R773, 774	ERDS1FVJ6R8T	1/2W 6.8 Δ	R920	ERDS2TJ222	1/4W 2.2K	R1434	ERDS2TJ822	1/4W 8.2K
R777, 778	ERDS1FJ270	1/2W 27 Δ	R921	ERDS2TJ103	1/4W 10K	R1435	ERDS2TJ103	1/4W 10K
R780	ERDS1FVJ4R7T	1/2W 4.7 Δ	R922, 923	ERDS2TJ472	1/4W 4.7K	R1443	ERDS2EJ820	1/4W 82
R791	ERC12ZGK335	1/2W 3.3M Δ	R925, 926	ERDS2TJ102	1/4W 1K	R1449	ERDS2TJ102	1/4W 1K
R801	ERDS2TJ681	1/4W 680	R927	ERDS2TJ331	1/4W 330	R1452	ERDS2TJ471	1/4W 470
R802	ERDS2TJ102	1/4W 1K	R928, 929	ERDS2TJ103	1/4W 10K	R1453	ERDS2TJ101	1/4W 100
R803	ERDS2TJ105T	1/4W 1M	R930, 931	ERD25FJ101	1/4W 100 Δ	R1454	ERDS2TJ272T	1/4W 2.7K
R804	ERDS2TJ104	1/4W 100K	R932	ERDS2TJ102	1/4W 1K	R1455, 1456	ERDS2TJ473	1/4W 47K
R805	ERDS2TJ223	1/4W 22K	R933, 934	ERDS2TJ473	1/4W 47K	R1457	ERDS2TJ274	1/4W 270K
R806	ERDS2TJ471	1/4W 470	R935, 936	ERDS2TJ474	1/4W 470K	R1458	ERDS2TJ154	1/4W 150K
R807	ERDS2TJ822	1/4W 8.2K	R937	ERDS2TJ103	1/4W 10K	R1459	ERDS2TJ332	1/4W 3.3K
R808	ERDS2TJ563	1/4W 56K	R938	ERDS2TJ102	1/4W 1K	R1460	ERDS2TJ181T	1/4W 180
R809-812	ERDS2TJ102	1/4W 1K	R939	ERDS2TJ103	1/4W 10K	R1461, 1462	ERDS2TJ223	1/4W 22K
R813, 814	ERDS2TJ122	1/4W 1.2K	R971, 972	ERDS2TJ221	1/4W 220	R1463	ERDS2TJ103	1/4W 10K
R815, 816	ERDS2TJ152	1/4W 1.5K	R973	ERDS2TJ391	1/4W 390	R1464-1466	ERDS2TJ474	1/4W 470K
R817, 818	ERDS2TJ182	1/4W 1.8K	R1001	ERDS2TJ102	1/4W 1K	R1467-1469	ERDS2TJ332	1/4W 3.3K
R819	ERDS2TJ222	1/4W 2.2K	R1002, 1003	ERDS2TJ470	1/4W 47	R1470	ERDS2TJ333	1/4W 33K
R821	ERDS2TJ332	1/4W 3.3K	R1004-1006	ERDS2TJ223	1/4W 22K	R1472	ERDS2TJ682T	1/4W 6.8K
R823	ERDS2TJ472	1/4W 4.7K	R1007	ERDS2TJ824	1/4W 820K	R1473	ERDS2TJ222	1/4W 2.2K
R825	ERDS2TJ682T	1/4W 6.8K	R1008	ERDS2TJ102	1/4W 1K	R1474-1476	ERDS2TJ474	1/4W 470K
R827	ERDS2TJ103	1/4W 10K	R1009	ERDS1FVJ680T	1/2W 68 Δ	R1477	ERDS2TJ222	1/4W 2.2K
R828, 829	ERDS1FVJ331T	1/2W 330 Δ	R1010, 1011	ERDS2TJ473	1/4W 47K	R1478	ERDS2TJ332	1/4W 3.3K
R830	ERDS2TJ104	1/4W 100K	R1012, 1013	ERDS2TJ153	1/4W 15K	R1479	ERDS2TJ104	1/4W 100K
R831	ERDS2TJ152	1/4W 1.5K	R1014, 1015	ERDS2TJ752T	1/4W 7.5K	R1480	ERDS2TJ102	1/4W 1K
R832	ERDS2TJ332	1/4W 3.3K	R1017	ERDS2TJ474	1/4W 470K	R1481	ERDS2TJ104	1/4W 100K
R835, 836	ERDS2TJ824	1/4W 820K	R1018-1021	ERDS2TJ473	1/4W 47K	R1482	ERDS2TJ102	1/4W 1K
R837, 838	ERDS2TJ154	1/4W 150K	R1022	ERDS2TJ103	1/4W 10K	R1483	ERDS2TJ562	1/4W 5.6K
R839, 840	ERDS2TJ153	1/4W 15K	R1023, 1024	ERDS2TJ224T	1/4W 220K	R1484	ERDS2TJ222	1/4W 2.2K
R841, 842	ERDS2TJ222	1/4W 2.2K	R1025	ERDS2TJ102	1/4W 1K	R1485	ERDS2TJ102	1/4W 1K

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
R1486	ERDS2TJ332	1/4W 3.3K	C312	ECEA1VK4R7	35V 4.7U	C617, 618	ECQB1H681KF3	50V 680P
R1487	ERDS2TJ104	1/4W 100K	C313, 314	ECBT1H181KB5	50V 180P	C651	ECEA1HK2R2B	50V 2.2U
R2001	ERDS2TJ473	1/4W 47K	C351	ECEADJU101B	6.3V 100U	C652	ECKR1H103ZF5	50V 0.01U
R2005-2008	ERDS2TJ104	1/4W 100K	C352	ECEAJK101	6.3V 100U	C701, 702	ECES71V103VN	71V 10000U Δ
R2009, 2010	ERDS2TJ473	1/4W 47K	C353	ECBT1H120J5	50V 12P	C703	ECKR1H103ZF5	50V 0.01U Δ
R2011, 2012	ERDS2TJ104	1/4W 100K	C354	ECEADJU102	6.3V 1000U	C704	ECEA1VU101B	35V 100U
R2031, 2032	ERDS2TJ473	1/4W 47K	C355	ECBT1H120J5	50V 12P	C705	ECEA1CU101	16V 100U
R2033, 2034	ERDS2TJ562	1/4W 5.6K	C356	ECEADJU102	6.3V 1000U	C706	ECKR1H103ZF5	50V 0.01U
R2035-2038	ERDS2TJ222	1/4W 2.2K	C357	ECEA1CU470	16V 47U	C709, 710	ECKR1H103ZF5	50V 0.01U Δ
R2039, 2040	ERDS2TJ562	1/4W 5.6K	C358	ECEA1CK100B	16V 10U	C711	ECEA1CU101	16V 100U
			C359	ECEA1CU470	16V 47U	C712	ECEA1VU470	35V 47U Δ
		CAPACITORS	C401, 402	ECBT1E103ZF	25V 0.01U	C713	ECEADJU101B	6.3V 100U
			C405, 406	ECBT1H101KB5	50V 100P	C751	ECEA1CU102	16V 1000U
C101, 102	ECBT1H150JC5	50V 15P	C407	ECEAJPS101B	6.3V 100U	C752	ECEA1CU470	16V 47U
C103	ECBT1H102KB5	50V 1000P	C408, 409	ECBT1E103ZF	25V 0.01U	C753, 754	ECKR1H103ZF5	50V 0.01U
C105	ECEADJU221	6.3V 220U	C410	ECEA1CU220	16V 22U	C755	ECBT1E103ZF	25V 0.01U
C106	ECKR1H103ZF5	50V 0.01U	C421	ECEA1CU220	16V 22U	C756	ECEA1CU220	16V 22U
C107	ECKT1H223ZF	50V 0.022U	C451, 452	ECEA1VPS4R7	35V 4.7U	C771	ECQE2104KF3	250V 0.1U Δ
C108	ECEA1EK4R7	25V 4.7U	C453, 454	ECBT1H101KB5	50V 100P	C791	ECKWNS103ZV	500V 0.01U Δ
C109	ECEA1CU330	16V 33U	C455, 456	ECBT1H102KB5	50V 1000P	C801	ECEADJU102	6.3V 1000U
C110, 111	ECBT1H102KB5	50V 1000P	C457, 458	ECFR1E223KR	25V 0.022U	C802	ECBT1E103ZF	25V 0.01U
C201, 202	ECKR1H103ZF5	50V 0.01U	C459, 460	ECFR1E682KR	25V 6800P	C803, 804	ECEADJU102	6.3V 1000U
C204	ECBT1C103MS5	16V 0.01U	C461, 462	ECEA1VPS4R7	35V 4.7U	C805	ECEAJK221B	6.3V 220U
C205	ECKT1H223ZF	50V 0.022U	C463, 464	ECEAJPS330	6.3V 33U	C806	ECBT1E103ZF	25V 0.01U
C206	ECBT1H150JC5	50V 15P	C501, 502	ECFR1E333KR	25V 0.033U	C807, 808	ECEA1HKR47	50V 0.47U
C207	ECBT1C103MS5	16V 0.01U	C503, 504	ECBT1H101KB5	50V 100P	C809	ECEAJK470	6.3V 47U
C208	ECEADJU101B	6.3V 100U	C505, 506	ECEA1CU470	16V 47U	C810	ECKR1H103ZF5	50V 0.01U
C209	ECEA1HK100	50V 10U	C507-510	ECBT1E103ZF	25V 0.01U	C811-814	ECBT1E103ZF	25V 0.01U
C210-212	ECKT1H223ZF	50V 0.022U	C511, 512	ECEA1HK3R3	50V 3.3U	C815	ECEA1CK470	16V 47U
C213	ECBT1H101KB5	50V 100P	C513, 514	ECBT1H150J5	50V 15P	C816	ECEA1CK100B	16V 10U
C214	ECEA1CK100B	16V 10U	C515, 516	ECBT1H101KB5	50V 100P	C817, 818	ECBT1H102KB5	50V 1000P
C215	ECKR1H103ZF5	50V 0.01U	C517, 518	ECBT1H330J5	50V 33P	C819	ECQP1102J23	100V 1000P
C216	ECEA1CK100B	16V 10U	C519, 520	ECEA1HK3R3	50V 3.3U	C820	ECEA1CK470	16V 47U
C217	ECEA1HK2R2B	50V 2.2U	C521, 522	ECKR1H103ZF5	50V 0.01U	C821, 822	ECEA1HK3R3	50V 3.3U
C220	ECEA1CK100B	16V 10U	C523	ECBT1H330J5	50V 33P	C851, 852	ECEADJU101B	6.3V 100U
C221	ECFR1E183KR	25V 0.018U	C524	ECEA1HK010B	50V 1U	C853, 854	ECFR1E104KR	25V 0.1U
C222	ECQM1H473JZ	50V 0.047U	C525	ECEA1HK2R2B	50V 2.2U	C891	ECFR1E392KR	25V 3900P
C225	ECBT1H180JC5	50V 18P	C526, 527	ECBT1E103ZF	25V 0.01U	C892	ECEADJU470B	6.3V 47U
C226	ECKR1H103ZF5	50V 0.01U	C529, 530	ECEA1CU220	16V 22U	C901	ECFA0JU102	6.3V 1000U
C227	ECEA1CK100B	16V 10U	C531	ECBT1H330J5	50V 33P	C902	ECBT1E103ZF	25V 0.01U
C228	ECBT1H100JC5	50V 10P	C532	ECBT1E103ZF	25V 0.01U	C904, 905	ECEADJU102	6.3V 1000U
C229	ECBT1H102KB5	50V 1000P	C533, 534	ECEA1VPS4R7	35V 4.7U	C906	ECBT1E103ZF	25V 0.01U
C230	ECCR1H680JS5	50V 68P	C601, 602	ECEA1VPS4R7	35V 4.7U	C909, 910	ECBT1H101KB5	50V 100P
C231	ECCR1H820JS5	50V 82P	C603, 604	ECQP1271JZ	50V 270P	C911, 912	ECEA2AU100	100V 10U
C301	ECEA1CU101	16V 100U	C605, 606	ECEA1CPS220	16V 22U	C913	ECEA1VK100B	35V 10U
C302	ECEA1HKR47	50V 0.47U	C607, 608	ECCR1H100K5	50V 10P	C914	ECEA1HK100	50V 10U
C303	ECEA1HK010B	50V 1U	C609, 610	ECCD1H151K	50V 150P	C916	ECEA1HK010B	50V 1U
C304-306	ECEA1HK3R3	50V 3.3U	C611, 612	ECKT1H223ZF	50V 0.022U	C917	ECEA1CK100B	16V 10U
C307, 308	ECFR1E273KR	25V 0.027U	C613	ECEA1VU470	35V 47U	C971	ECKR1H103ZF5	50V 0.01U
C309	ECKT1H223ZF	50V 0.022U	C614	ECEA1HJ330	50V 33U	C1001	ECKR1H103ZF5	50V 0.01U
C310	ECFR1E473KR	25V 0.047U	C615	ECEA2AU100	100V 10U	C1002	ECBT1E103ZF	25V 0.01U
C311	ECQP1471JZ	50V 470P	C616	ECEA2AN2R2SB	100V 2.2U Δ	C1003, 1004	ECEA1HK4R7	50V 4.7U

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
C1005-1008	ECQV1H104JZ3	50V 0.1U	C1458	ECQM1H472JZ	50V 4700P
C1009, 1010	ECBA1H681KB5	50V 680P	C1459	ECQM1H273KV3	50V 0.027U
C1011	ECQV1H334JZ3	50V 0.33U	C1460	ECQM1H473JZ	50V 0.047U
C1012	ECKR1H103ZF5	50V 0.01U	C1461	ECEA1CK100B	16V 10U
C1013	ECQV1H334JZ3	50V 0.33U	C1462	ECQB1H104KF3	50V 0.1U
C1014-1017	ECEA1HK4R7	50V 4.7U	C1463	ECQV1H334JZ3	50V 0.33U
C1018, 1019	ECQM1H682JZ	50V 6800P	C1464	ECEA1CU221	16V 220U
C1020	ECEA1CK470	16V 47U	C1465	ECEA1CK470	16V 47U
C1021	ECEA1CK101	16V 100U	C1466	ECQMLH562JZ	50V 5600P
C1022, 1023	ECEA1HKR22B	50V 0.22U	C1467	ECEA1CK100B	16V 10U
C1024, 1025	ECEA1HK4R7	50V 4.7U	C1468, 1469	ECEA1HK010B	50V 1U
C1026, 1027	ECQM1H224JZ	50V 0.22U	C1470	ECEA1EK3R3B	25V 3.3U
C1028, 1029	ECEA1CK100B	16V 10U	C1472, 1473	ECEA1EK3R3B	25V 3.3U
C1030	ECQV1H154JZ3	50V 0.15U	C1474, 1475	ECKR1H103ZF5	50V 0.01U
C1031	ECEA1CK100B	16V 10U	C1476-1478	ECBT1H181KB5	50V 180P
C1032	ECQV1H154JZ3	50V 0.15U	C1479	ECEA1CK100B	16V 10U
C1033	ECEA1CK100B	16V 10U	C1480	ECEA1CK470	16V 47U
C1034-1036	ECQB1H103JZ	50V 0.01U	C1481	ECEA1HK3R3	50V 3.3U
C1037	ECQM1H222KV3	50V 2200P	C1482, 1483	ECEA1EK3R3B	25V 3.3U
C1038, 1039	ECEA1HK4R7	50V 4.7U	C1484	ECEA1HK010B	50V 1U
C1040, 1041	ECEA1CK101	16V 100U	C1485	ECEA1CK100B	16V 10U
C1042	ECEA1HK4R7	50V 4.7U	C1486	ECEA1HK3R3	50V 3.3U
C1043	ECQV1H474JZ3	50V 0.47U	C1487, 1488	ECBT1E103ZF	25V 0.01U
C1045, 1046	ECEA1CK100B	16V 10U	C1489, 1490	ECEA1EK3R3B	25V 3.3U
C1047, 1048	ECBT1H470J5	50V 47P	C1491	ECBT1H330J5	50V 33P
C1049, 1050	ECBT1E103ZF	25V 0.01U	C2001, 2002	ECEA1VK4R7	35V 4.7U
C1301, 1302	ECEA1HU3R3	50V 3.3U	C2005-2008	ECEA1CK100B	16V 10U
C1303, 1304	ECBA1H681KB5	50V 680P	C2009-2012	ECQV1H393JZ3	50V 0.039U
C1305, 1306	ECBT1H821KB5	50V 820P	C2013-2016	ECBT1C103KS5	16V 0.01U
C1307, 1308	ECEA1HU220	50V 22U	C2017-2020	ECBT1C222KR5	16V 2200P
C1309, 1310	ECBT1H100JC5	50V 10P	C2021-2024	ECBT1H102KB5	50V 1000P
C1311	ECEA2AU100	100V 10U	C2025, 2026	ECEA0JK101	6.3V 100U
C1312	ECEA1JU220	63V 22U	C2027	ECBT1E103ZF	25V 0.01U
C1313, 1314	ECKT1H223ZF	50V 0.022U	C2028	ECEA0JK101	6.3V 100U
C1315, 1316	ECEA1VJ332	35V 3300U Δ	C2029, 2030	ECBT1E103ZF	25V 0.01U
C1317	ECKR2H103ZU	500V 0.01U Δ	C2031, 2032	ECBT1H330J5	50V 33P
C1318	ECKR1H103ZF5	50V 0.01U	C2035-2040	ECEA1VK3R3	35V 3.3U
C1321, 1322	ECEA1HK3R3	50V 3.3U	C2051, 2052	ECBT1E103ZF	25V 0.01U
C1403	ECEA1HU010	50V 1U			
C1404	ECQM1H332KV3	50V 3300P			
C1405	ECBT1H561KB5	50V 560P			
C1406	ECQB1H104KF3	50V 0.1U			
C1407	ECEA1CK470	16V 47U			
C1408-1410	ECQB1H104KF3	50V 0.1U			
C1411	ECQM1H332KV3	50V 3300P			
C1412	ECBT1H561KB5	50V 560P			
C1413	ECEA1HK010B	50V 1U			
C1414	ECQM1H123JZ	50V 0.012U			
C1415	ECFR1E104KR	25V 0.1U			
C1416	ECEA0JU221	6.3V 220U			
C1441	ECEA0JU220B	6.3V 22U			
C1457	ECEA1CK100B	16V 10U			

REAR PANEL TERMINALS AND FUNCTIONS

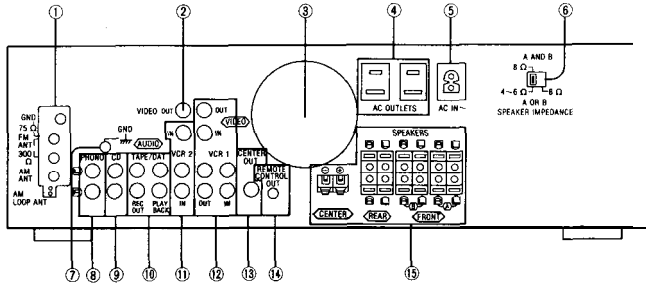

① Antenna connection terminals

② "VIDEO OUT" terminal


Connect a video connection cable (not included) to the video input terminal of TV or projection TV

③ Cooling fan

The cooling fan operates at high output power levels only.

④ Outlets "SWITCHED"

Power to these outlets is controlled by the power switch of this unit. Audio equipment rated up to 80 W (total for all outlets) can be connected here. For proper remote-control operation, connect the power cords of the tape deck and compact disc player to these outlets as indicated below:

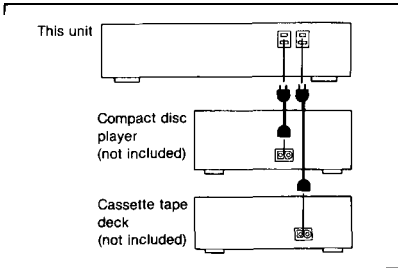

⑤ AC IN socket (AC IN)

Connect this socket to an AC outlet on the wall using the power supply cord.

⑥ Speaker impedance selector

Before use, set to the correct impedance corresponding to the impedance of the speaker systems being used

⑦ "GND" terminal

Connect the turntable's ground wire to this terminal (if applicable).

⑧ "PHONO" terminals


Connect a turntable only. Do not connect any other sound source to these terminals.

⑨ "CD" terminals

Connect a stereo connection cable (not included) to the "LINE OUT" terminal of the compact disc player


⑩ "TAPE/DAT" terminals

Connect a tape deck or a digital audio tape deck (DAT) by using stereo connection cables (not included).

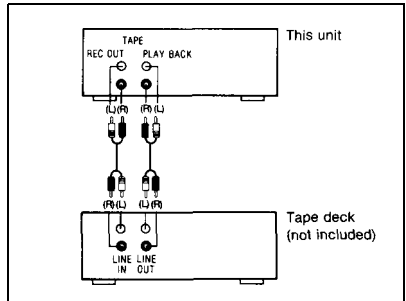


⑪ "VCR 2" terminals

Connect a second VCR or a video disc player by using stereo connection cable (not included) and video connection cable (not included)

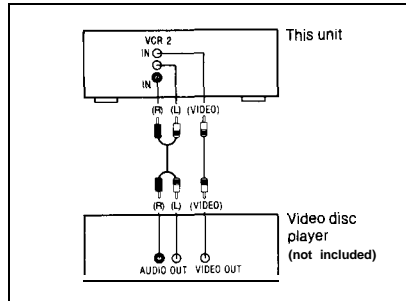

12 "VCR 1" terminals

Connect a "CR by using stereo connection cables (not included) and video connection cables (not included)

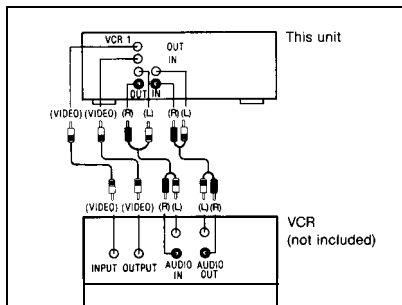


13 "CENTER OUT" terminal

This terminal is used to enjoy the Dolby Pro-Logic Surround and the Dolby 3 stereo sound

Connect a Y-adaptor cable (not included) to the audio input terminal(s) of the external amplifier or TV

When using the speakers, after setting the center level of the this unit to MAX, adjust the volume on the external amplifier or the TV

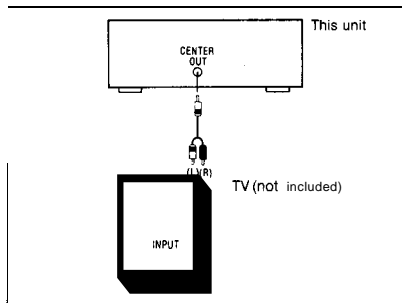


14 Remote-control OUT terminal

(REMOTE CONTROL OUT)

This terminal can be used only with Technics components which have the appropriate remote-control terminal (Consult, your dealer for details.)


Proper connection with remote-control connection cables SJP2257T will allow control of some functions from this unit's remote-control transmitter

Connect to a tape deck and/or compact disc player as shown

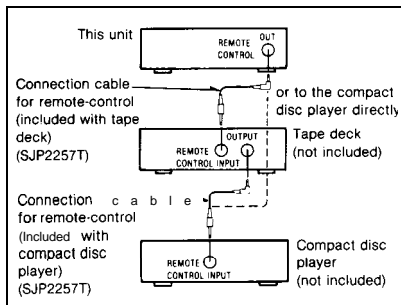

15 Speaker connection terminals


ACCESSORIES




AC power supply cord 1 pc.
(SJA172-1):(P)
(SJA172) (PC)



Remote-control transmitter
(RAK-SA501P) ... 1 pc



Batteries
("M-4 "AAA" R03) 2 pcs



AM loop antenna
(SPB1 163T) 1 pc.



AM antenna holder . 1 pc
(SMA233-1 M)



Screws
(XTN3+10AFZ) 2 pcs




FM indoor antenna
(SSA272M) . . . 1 pc

FRONT PANEL CONTROLS AND FUNCTIONS

The functions indicated by the numbers with black background (for example ②) can be activated from both the main unit and the remote control transmitter.

(See pages 10–12.)

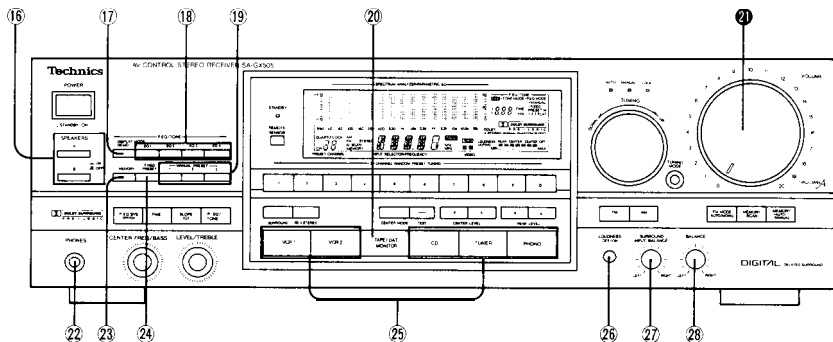

Amplifier section

⑬ Speaker selectors (SPEAKERS)

These selectors **are** used to select the speaker system(s) (A and/or B)

⑰ Display mode select button (-DISPLAY MODE, -DEMO)

This button is used to select either the spectrum analysis level ("Bar-type display" or "Dot display") or equalization level display

If the button is pressed for 3 seconds or more, this unit will start a demonstration mode for the parametric EQ system.

⑱ Parametric EQ band select buttons

These buttons **are** used to select the band to be adjusted

⑲ Equalization preset buttons (MANUAL PRESET)

These buttons are used for storing or recalling the curves made by the parametric EQ system

⑳ Tape-monitor switch (TAPE/DAT MONITOR)

Press this button to listen to a tape or a digital audio tape connected to the "TAPE/DAT" terminals.

To listen to some other source, press this button once again (so that the indicator is switched OFF).

@ Volume control (VOLUME)

㉒ Headphones jack (PHONES)

㉓ Parametric EQ system memory button (MEMORY)

This button enables the curves to be stored in the parametric EQ system memory

㉔ Fixed preset button (FIXED PRESET)

This button is used to recall a "fixed preset" curve from the main unit's memory

㉕ Input selector buttons

These buttons are used to select the sound source to be heard, such as a disc, radio broadcasts, etc. The selected sound source is shown on the audio input selector/frequency display.

The "PHONO" input selector has two functions: When pressed momentarily it selects "PHONO". When pressed and held for about 4 seconds, it de-activates the muting function.


㉖ Loudness switch (LOUDNESS)

Set to the "ON" position (the loudness indicator will illuminate), when listening to music at low volume. Auditory perception of sound in the low frequency range falls off at low volume, but when the switch is in this position, this deficiency is compensated for, so that the full impact of the musical performance can be enjoyed.

㉗ Dolby Pro-Logic Surround input balance control (SURROUND INPUT BALANCE)

This control is used to minimize dialogue leakage in the surround channel thereby optimizing the Dolby Pro-Logic Surround decoding operation.

㉘ Balance control (BALANCE)

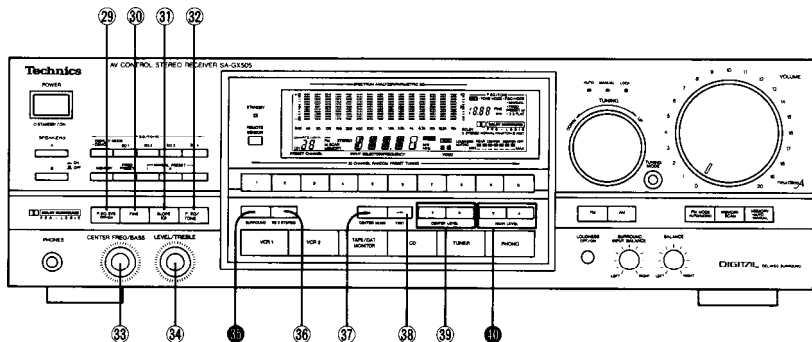

Amplifier section

29 Parametric EQ system ON/OFF button (P. EQ SYS)

This button is used to turn the parametric EQ system ON or OFF.

30 Fine mode select button (FINE)

This button is used to fine-adjust the center frequency of the parametric EQ.

31 Slope changeover button [SLOPE (Q)]

This button is used to increase or decrease the slope of the parametric EQ curves.

32 Parametric EQ/tone mode select button (P. EQ/TONE)

This button is used to select parametric EQ mode or tone mode.

33 Center frequency select/bass control (CENTER FREQ/BASS)

This control is used to select the center frequency in the parametric EQ mode or to adjust the low-frequency sounds in the tone mode.

34 Frequency level/treble control (LEVEL/TREBLE)

This control is used to adjust the frequency level in the parametric EQ mode or the high-frequency sounds in the tone mode.

35 Dolby Pro-Logic Surround ON/OFF button (SURROUND)

This button is used to activate the Dolby Pro-Logic Surround effect.

36 Dolby 3 stereo ON/OFF button (3 STEREO)

This button is used to activate the Dolby 3 stereo effect.

37 Center mode select button (CENTER MODE)

Each time you press this button, the center mode will change as follows: NORMAL- PHANTOM- CENTER OFF.

38 Test signal button (TEST)


When using the center speaker and the rear speakers, press this button to activate the test signal. Then adjust the volume balance of the center speaker and rear speakers.

39 Center speaker level adjustment buttons (CENTER LEVEL)

These buttons are used to adjust the volume level of the center speaker.

40 Rear speaker level adjustment buttons (REAR LEVEL)

These buttons are used to adjust the volume level of the rear speakers.

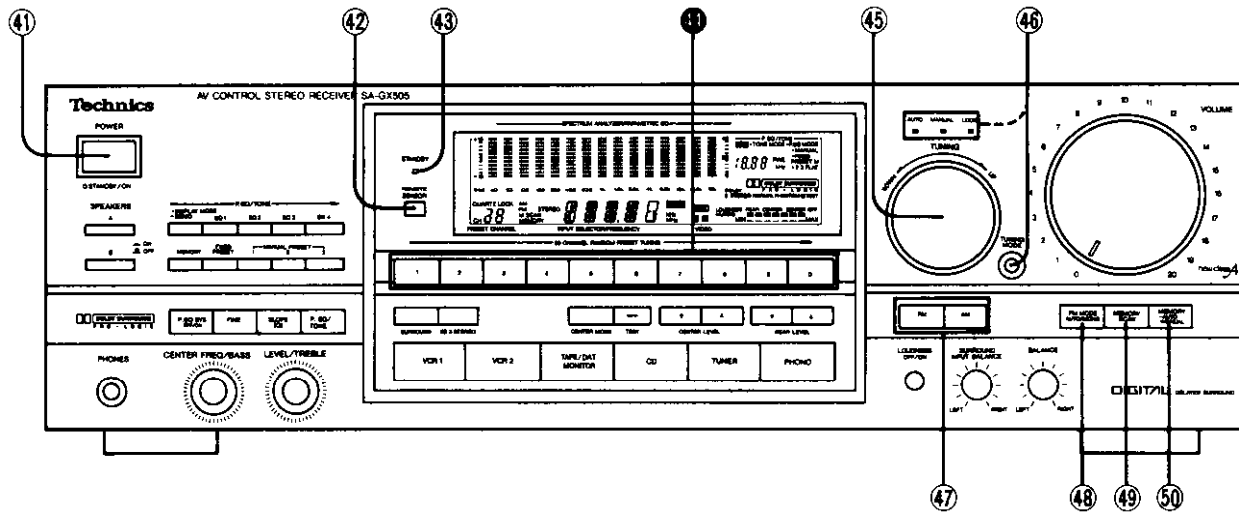

Tuner section

41 Power “ STANDBY/ON” switch (POWER, STANDBY/ON)

This switch is used to turn the power to the main unit ON and OFF.

Selecting “OFF” from the remote control transmitter actually sets the main unit to the “STANDBY” mode.

42 Remotetontrol signal receptor (REMOTE SENSOR)

Receives the signals from the remote-control.

43 “STANDBY” indicator (STANDBY)

This indicator illuminates when the “STANDBY” mode is selected by the main unit or the remote control transmitter.

44 Preset-tuning buttons (1-0) (30 CHANNEL RANDOM PRESET TUNING)

These buttons are used to preset broadcast frequencies into the memory of this unit and to recall the desired preset stations.

45 Tuning control (TUNING)

This control is used to select an FM or AM broadcast.

When turning the control to the left, the frequency changes downward. When turning the control to the right, the frequency changes upward.

46 Tuning-mode selector/indicator (TUNING MODE)

Each time this selector is pressed, the selection changes, in sequence, to “AUTO”, “MANUAL” and “LOCK”.

AUTO:

In this position, broadcast channels are automatically selected when the tuning control is momentarily turned to the left or right to start the frequency changing.

MANUAL:

In this position, the tuning control can be used to locate the desired channel manually.

The frequency changes only as the tuning control is turned to the right to left.

LOCK:

In this position, the broadcast channel presently being heard is locked in, and other broadcast stations cannot be tuned to, even if the tuning control is turned.

47 Band selectors

FM: Press this button to listen to an FM broadcast.

AM: Press this button to listen to an AM broadcast.

48 FM mode selector (FM MODE)


This unit automatically switches to the stereo mode when an FM stereo broadcast is received. This selector is used to select the mode (stereo or monaural) of FM broadcast signals.

49 Memory scan button (MEMORY SCAN)

This button is used to locate a desired broadcast station: each broadcast station is selected for about 3 seconds.

50 Memory button (MEMORY)

This button is used when presetting broadcast station frequencies into memory.

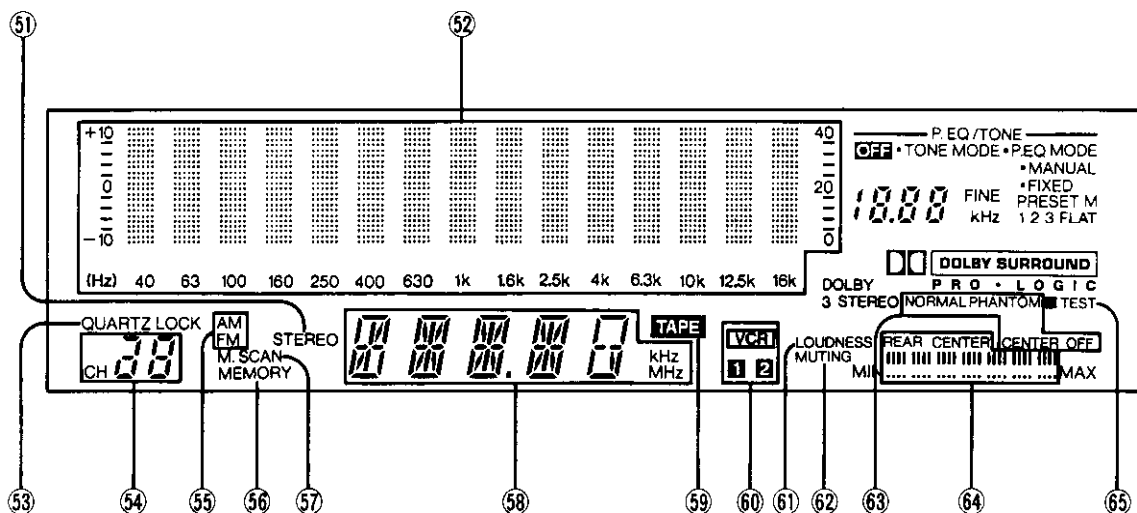

Display section

51 FM stereo indicator (STEREO)

This indicator automatically illuminates when an FM stereo broadcast is being received.

It will not illuminate if the FM mode selector is set to the monaural mode.

52 Spectrum analysis/parametric EQ level display (SPECTRUM ANALYZER/PARAMETRIC EQ)

This display shows the spectrum analysis level ("Bar-type display" or "Do, display") or equalization level.

53 Quartz-lock indicator (QUARTZ LOCK)

This indicator illuminates when the unit is tuned precisely to a broadcast station.

54 Channel display

This display shows the channel number selected by one of the preset-tuning buttons.

Also this display shows the channel number for about 3 seconds during memory scan operation.

55 Band indicators (AM, FM)

Indicates the selected band.

56 Memory indicator (MEMORY)

This indicator illuminates when the memory button is pressed.

57 Memory scan indicator (M. SCAN)

This indicator illuminates when the memory scan button is pressed.

58 Audio input selector/frequency display (INPUT SELECTOR/FREQUENCY)

Displays the selected source or broadcast frequency.

59 Tape indicator (TAPE)

This indicator will illuminate when the tape-monitor switch is pressed.

60 VCR display (VCR)

Displays the selected VCR.

61 Loudness indicator (LOUDNESS)

This indicator will illuminate when the loudness switch is pressed.

62 Muting indicator (MUTING)

This indicator will illuminate when the muting button (on the remote-control transmitter) is pressed.

63 Center mode indicators


These indicators show the center mode selected by the center mode select button.

64 Rear/center level indicator

Displays the level adjusted by the center speaker level adjustment button or rear speaker level adjustment button.

65 Test signal indicator (TEST)

This indicator illuminates when the test signal button is pressed in the Dolby Pro-Logic Surround mode and the Dolby 3 stereo mode.

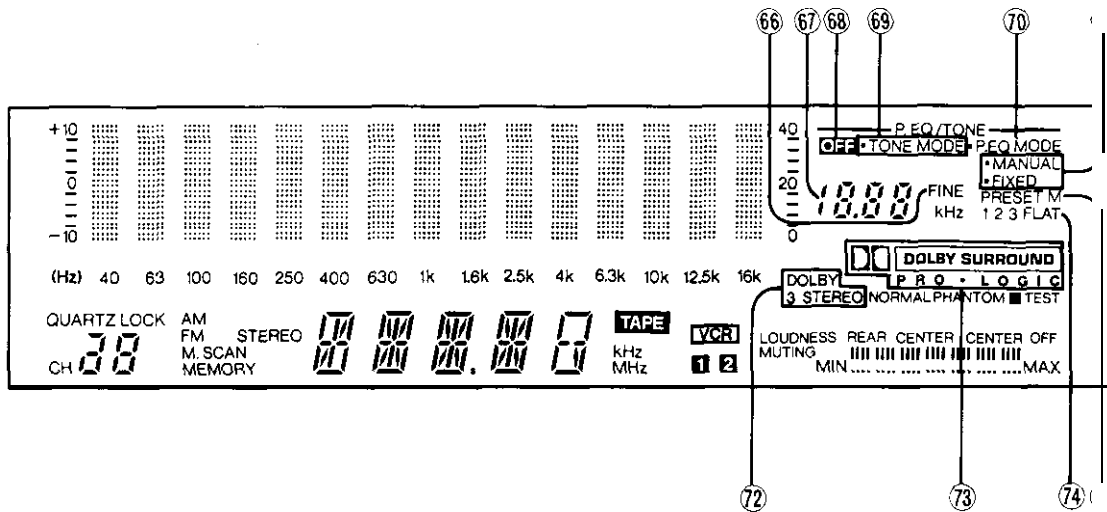

66 Fine mode indicator (FINE)

This indicator illuminates when the line mode select button is pressed in the parametric EQ mode.

67 Parametric EQ system center frequency display

It displays the center frequency of the curves in the parametric EQ mode arranged by the user with the parametric EQ system or the curves pre-programmed in this unit's memory.

68 Parametric EQ system off indicator (OFF)

This indicator illuminates when the parametric EQ system is Off.

69 Tone mode indicator (TONE MODE)

This indicator illuminates when the parametric EQ/tone mode select button is set to the tone mode.

70 Parametric EQ mode indicator (P.EQ MODE)

This indicator illuminates when the parametric EQ/tone mode select button is set to the parametric EQ mode.

71 Parametric EQ system operation select indicators (MANUAL/FIXED)

One of these indicators will illuminate in accordance with the fixed preset button or equalization preset buttons setting.

72 Dolby 3 stereo indicator (DOLBY 3 STEREO)

This indicator illuminates when the Dolby 3 stereo ON/OFF button is switched ON.

73 Dolby Pro-Logic Surround indicator (DOLBY SURROUND, PRO-LOGIC)


This indicator illuminates when the Dolby Pro-Logic Surround mode is selected.

74 Manual/fixed preset indicators (1 2 3 FLAT)

It displays the type of curve selected with the equalization preset buttons or fixed preset button in the parametric EQ mode.

75 Parametric EQ system memory indicator (M)

This indicator illuminates when the parametric EQ system memory button is pressed in the parametric EQ mode.

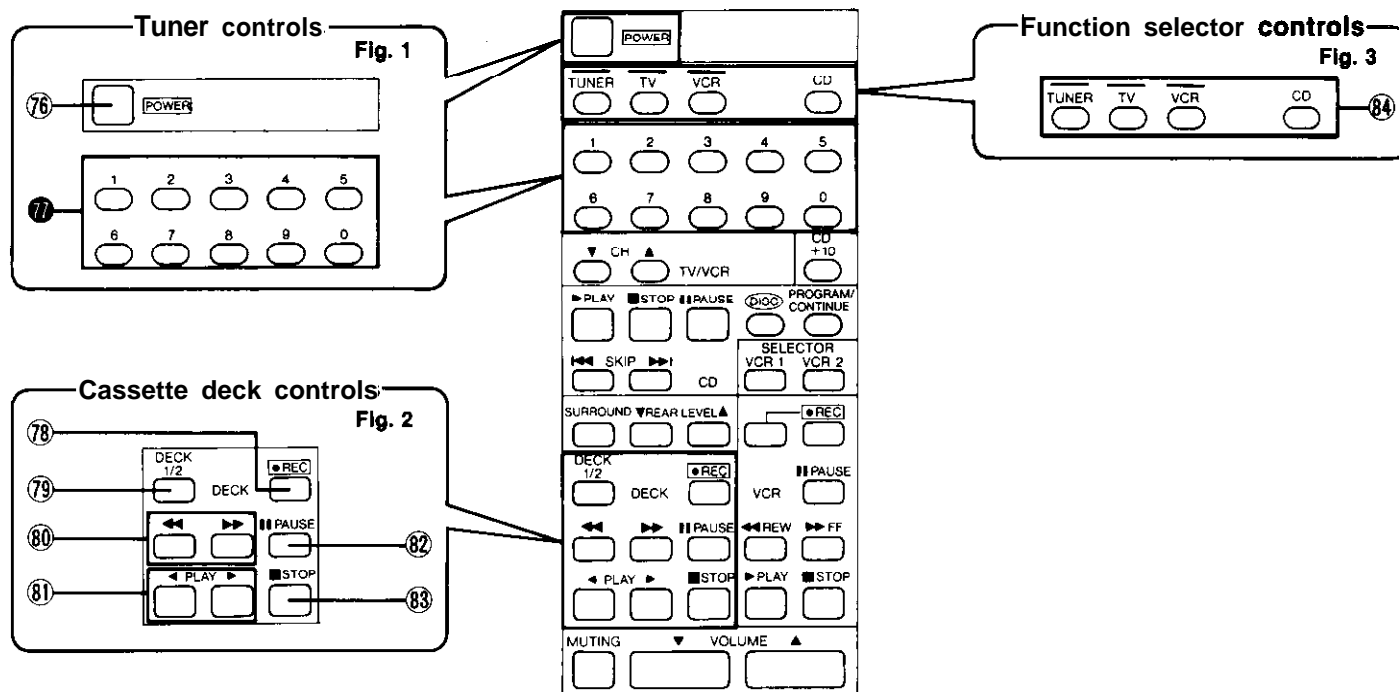

Remote control section

Tuner controls (Fig. 1)

⑦ Power switch (POWER)

This power switch is used for controlling the power (ON/OFF) of this system as well as any Panasonic remote controlled TV and/or VCR.

When switching the power of each unit ON and OFF, be sure to first press the appropriate function selector button on the remote control transmitter.

⑦ Preset-tuning buttons (1-0)

These buttons are used to tune to broadcast stations that have been preset to the unit's memory.

When these buttons are used, be sure to first press the "TUNER" button of the function selector buttons on the remote control transmitter.

Cassette deck controls (Fig. 2)

⑦ Record button (● REC)

Press this button to change to the recording stand-by mode.

⑦ Deck 1/Deck 2 selector

This button is used to select the deck to be operated by remote control when a double cassette deck is connected with this unit.

⑧ Fast-forward/cue/rewind/review buttons

(◀◀, ▶▶)

Press this button to advance or rewind the tape while the unit is in the stop mode.

Press this button to cue or review the contents at high speed, while the unit is in the play mode.

⑧ Playback buttons (◀ PLAY ▶)

To begin playback or recording, press one of these buttons corresponding to the side of the tape to be played (or recorded).

▶: For the "A"-side of the tape

◀: For the "B"-side of the tape

@ Pause button (|| PAUSE)

Press this button to temporarily stop playback or recording. Press the playback button to resume the play or recording.

@ Stop button (■ STOP)


To stop tape movement.

Function selector controls (Fig. 3)

@ Function selector buttons

(TUNER, TV, VCR, CD)

These buttons are used to change the functions of this remote control.

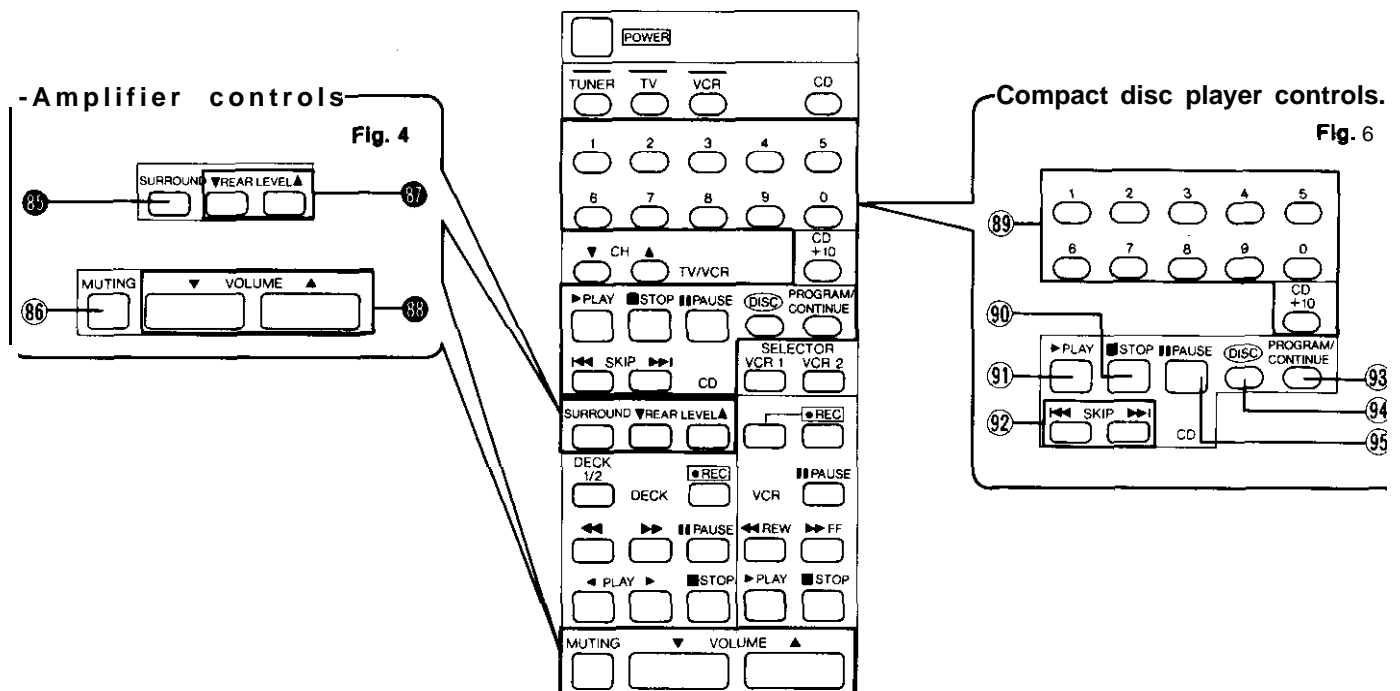

Amplifier controls (Fig. 4)

85 Dolby Pro-Logic Surround ON/OFF button (SURROUND)

This button is used to activate the Dolby Pro-Logic Surround effect.

86 Muting button (MUTING)

This button is used to temporarily attenuate ("mute") the volume level.

87 Rear speaker level adjustment buttons (▼ REAR LEVEL ▲)

These buttons are used to adjust the volume level of the rear speaker systems.

@Volume control (▼ VOLUME ▲)

These buttons are used to adjust the volume level.
▼: To reduce the volume level.
▲: To increase the volume level.

Compact disc player controls (Fig. 5)

@Numeric buttons (1-0, +10)

These buttons are used to select the track or the disc number (only 1-5).
When these buttons are used, be sure to first press the "CD" button of the function selector buttons of the remote control transmitter.

90 Stop button (■ STOP)

To stop compact disc play.

91 Play button (▶ PLAY)

To start compact disc play.

92 Skip buttons (◀◀ SKIP ▶▶)

Press one of these buttons briefly to move the pickup (backward or forward) to the beginning of a specific track.

@Program/continue button (PROGRAM/CONTINUE)


This button is used to select either the sequential play or program play mode.

94 Disc button (DISC)

This button is used to select the disc when a multi compact disc player is connected with this unit.

95 Pause button (|| PAUSE)

To temporarily stop compact disc play.

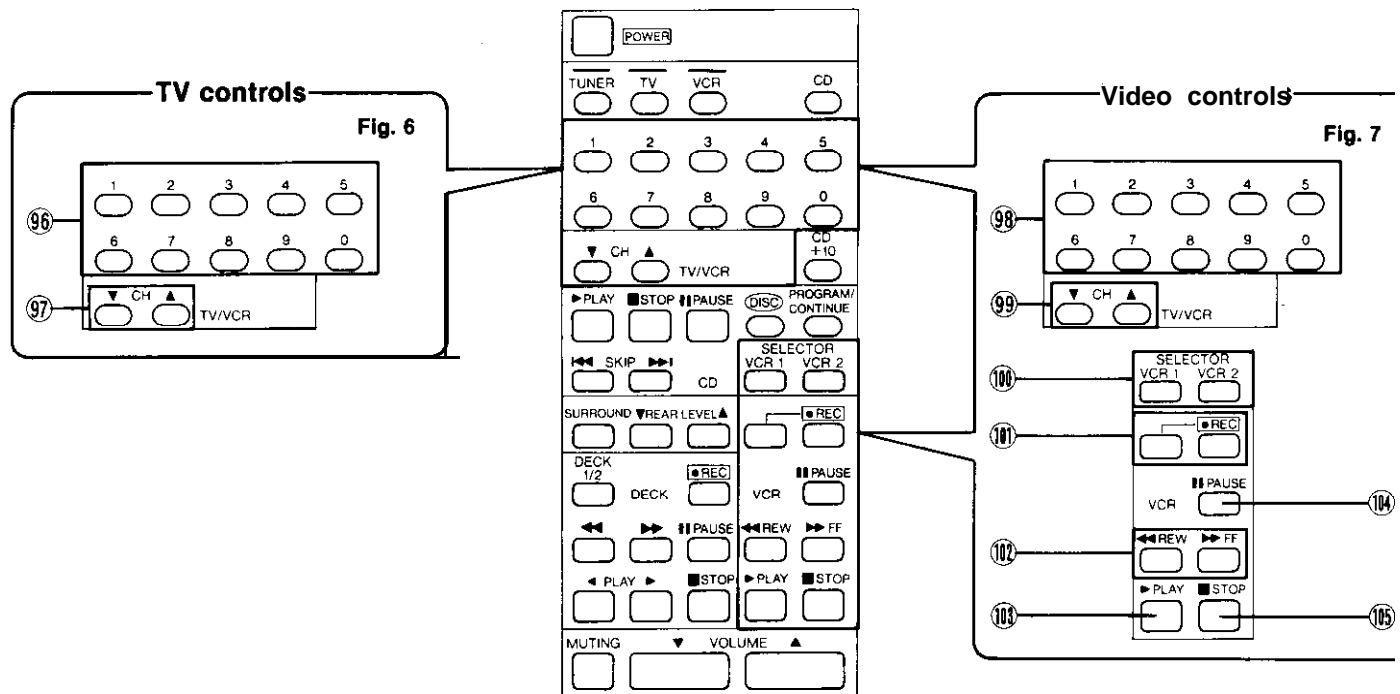

Remote control section

TV controls (Fig. 6)

When the buttons (96, 97) are used, be sure to first press the "TV" button of the function selector buttons of the remote control transmitter.

@Preset **channel buttons (1-0)**

These buttons are used to select TV channels.

97 **Channel up/down buttons (▼ CH ▲)**

These buttons are used to select TV channels.

Video controls (Fig. 7)

When the buttons (98, 99) are used, be sure to first press the "VCR" button of the function selector buttons of the remote control transmitter.

@Preset **channel buttons (1-0)**

These buttons are used to select video channels.

99 **Channel up/down buttons (▼ CH ▲)**

These buttons are used to select video channels.

@Selector **buttons (SELECTOR)**

VCR 1: Press this button to select the "VCR" 1 input selector position on the main "nit".

VCR 2: Press this button to select the "VCR 2" input selector position on the main "nit".

107 **Fast-forward/rewind buttons (◀◀ REW, . . FF)**

Press one of these buttons to advance or rewind the tape while the "nit is in the stop mode.

@Playback **button (▶ PLAY)**

This button is used for video playback.

104 **Pause button (▢ PAUSE)**

This button is used to pause during playback or video recording.

@Record buttons (● REC)

These buttons are used to record.

@Stop button (■ STOP)

This button is used to stop playback or video recording.