

MICRO

ELECTRONICS


MPS/2N2923,4,5
and similar types

NPN
SILICON
TRANSISTOR

DESCRIPTION

The above types are NPN silicon planar epitaxial transistors for use in AF small amplifiers and direct coupled circuits.

Their maximum power dissipation = 160mW at $T_a = 25^\circ\text{C}$.

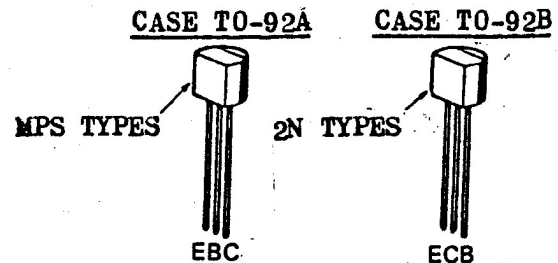

DEVICE SPECIFICATIONS ($T_a = 25^\circ\text{C}$)

DEVICE TYPE	V_{CE0} (V)	V_{BE0} (V)	I_{C0} @ V_{CB} (mA) (V)	H_{FE} @ I_C/V_{CE} (mA)(V)	$V_{CE(sat)}$ @ I_C/I_B (V) (mA)(mA)	NOTE
	min	min	max	min-max	max	
MPS/2N2711	18	5	500 @ 18	30-90 @ 2/4.5		$C_{ob} < 4\text{pF}$ @ $V_{CB}=10\text{V}$
MPS/2N2712	18	5	500 @ 18	75-225 @ 2/4.5		$C_{ob} < 12\text{pF}$ @ $V_{CB}=10\text{V}$
MPS/2N2716	18	5	500 @ 18	75-225 @ 2/4.5		$C_{ob} < 5\text{pF}$ @ $V_{CB}=10\text{V}$
MPS/2N2923	25	5	500 @ 25	90-180* @ 2/10		* h_{fe} @ 1KHz
MPS/2N2924				150-300* @ 2/10		
MPS/2N2925				235-470* @ 2/10		
MPS/2N3390	25	5	100 @ 18	400-800 @ 2/4.5		
MPS/2N3391				250-500 @ 2/4.5		
MPS/2N3392				150-300 @ 2/4.5		
MPS/2N3393				90-180 @ 2/4.5		
MPS/2N3394				55-110 @ 2/4.5		
MPS/2N3395				150-500 @ 2/4.5		
MPS/2N3396				90-500 @ 2/4.5		
MPS/2N3397				55-500 @ 2/4.5		
MPS/2N3398				55-800 @ 2/4.5		
MPS 6565	45	4	100 @ 30	40-160 @ 10/10	0.4 @ 10/1	$C_{ob} < 3.5\text{pF}$ @ $V_{CB}=10\text{V}$ $f_T > 200\text{MHz}$ @ $I_C=10\text{mA}$ $V_{CE}=10\text{V}$
MPS 6566				100-400 @ 10/10		
MPS 6573	35	4	100 @ 35	100- @ 0.1/5 200-500 @ 10/5	0.5 @ 10/1	* H_{FE} GROUPINGS : Y = 100-150 B = 125-185 G = 150-225 S = 200-300
MPS 6574	35	4	100 @ 35	100-300* @ 1/5	0.5 @ 10/1	
MPS 6575	45	4	100 @ 45	100- @ 0.1/5 200-500 @ 10/5	0.5 @ 10/1	
MPS 6576	45	4	100 @ 45	100-300* @ 1/5	0.5 @ 10/1	



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex: 43510 Micro Hx. Tel: 2343 0181-5

Dec-95